

Ice Cuber (40gr), 47kg/24h, 20kg bin, air-cooled**730327 (ICC47I20SNP)**

Ice maker, cube (40gr), 47 kg/24h, self-contained, 20kg ice collection bin included, air-cooled

Main Features

- Compliant to CE requirements for safety.
- Food grade ABS interior.
- Fully automatic in operation.
- Suitable for gravity drain only.
- Compact dimensions of the ice cubers make them highly suitable for any location, particularly those where space is at a premium.
- Water consumption and productivity calculated using 15°C water temperature and 21°C ambient temperature.
- The ice-making method (spray layering) guarantees crystalline, compact, hygienically pure ice cubes that are resistant to melting.
- Bin included.
- Ice cube pyramid-trunk shape.
- The ice making method guarantees a continuous and reliable production.
- Easy cleanability guaranteed by an automatic system: the cleaning switch activate the circulation and the rinse of water; at the end of the cycle just swithed again to start producing ice.
- Rounded internal corners of the bin assure ease of cleaning.
- The innovative anti-scale spray system with flexible nozzles avoids limescale deposits through small vibrations.

Construction

- Easy access to the main components for maintenance.
- Plug as standard (schuko type).
- AISI 304 stainless steel exterior.
- The sprayers are easy to take away, permit a simple flowing and prevent limestone formation.
- ON-OFF rocker switch.
- Adjustable 105-155mm feet.
- Internal ice containers in ABS.
- Reliability guaranteed by the quality of the construction materials used (front, top and sides in 304 AISI stainless steel) and the sophisticated product and process technology involved.
- Hygienical plastic spray arms removable without the use of tools.
- Aluminium evaporator ensures a safe contact with ice.
- Sturdy door opening system made in AISI 304 stainless steel.
- Supplied with flexible water supply, drain hoses and scoop.



A focus on sustainability

Sustainability

- Reduced energy consumption by fully insulated storage bin.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.

Technical specifications

Electric

Supply voltage:	220-240 V/1N ph/50 Hz
-----------------	-----------------------

Water:

Water outlet size:	25mm
--------------------	------

Capacity:

Bin capacity:	20 kg
---------------	-------

Key Information:

External dimensions, Width:	465 mm
-----------------------------	--------

External dimensions, Depth:	595 mm
-----------------------------	--------

External dimensions, Height:	849 mm
------------------------------	--------

Net weight:	45 kg
-------------	-------

Output:	47 kg/day
---------	-----------

Kind of cube:	Ice Cube 40 g
---------------	---------------

Sustainability

Refrigerant type:	R290
-------------------	------


Refrigerant weight:	70 g
---------------------	------

Water consumption:	5.3 lt/hr
--------------------	-----------




Installation drawings


Front

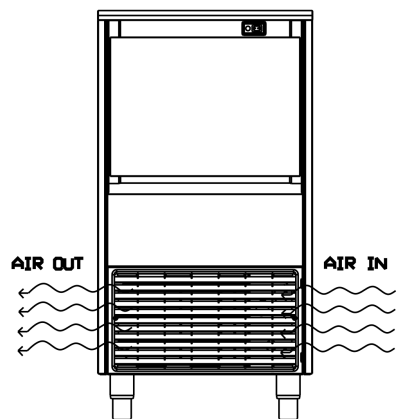


Side

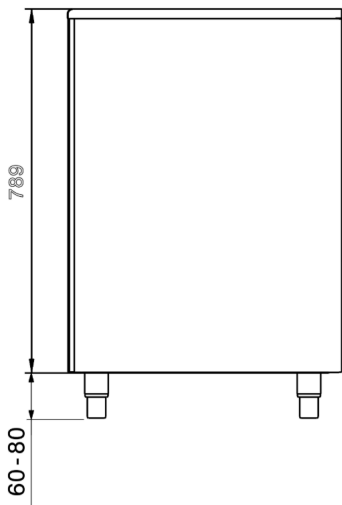

Top



Rear side

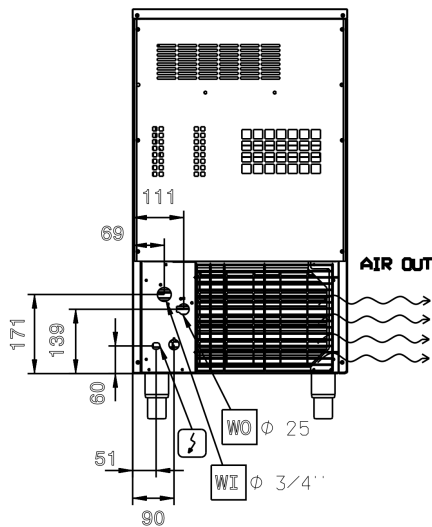

CWI1 = Cold Water inlet 1 (cleaning)
 EI = Electrical inlet (power)

D = Drain

Accessories

Optional Accessories

PNC Code	Description
Feet, wheels and ramps	
880692	Kit of 4 small black feet, 13mm (0/+22mm)
Other accessories	
0S1628	PURITY C150 QUELL KIT WITH OF FLOW METER
0S1629	PURITY C300 QUELL KIT WITH OF FLOW METER
880690	Drain pump kit

Recommended Detergents

PNC Code	Description
0S2881	S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T
0S2883	S03 ALCOHOL BASE DETERGENT; 6 BOTTLES X 750ML; ADR&IMDG&IATA Limited Quantity
0S2884	S04 GLASSES & HARD SURFACES CLEANERS; 6 BOTTLES X 750ML
0S3257	S05 - MULTIPURPOSE DEGREASER; 6PCS X 750ML; ADR&IMDG Limited Quantity

