

**730352 (ICC47I20SDP)**

Ice maker, cube (40gr), 47 kg/24h, self-contained, 20kg ice collection bin included, drain pump, air-cooled

Main Features

- Compliant to CE requirements for safety.
- Food grade ABS interior.
- Fully automatic in operation.
- Suitable for gravity drain only.
- Compact dimensions of the ice cubers make them highly suitable for any location, particularly those where space is at a premium.
- Water consumption and productivity calculated using 15°C water temperature and 21°C ambient temperature.
- The ice-making method (spray layering) guarantees crystalline, compact, hygienically pure ice cubes that are resistant to melting.
- Bin included.
- Ice cube pyramid-trunk shape.
- The ice making method guarantees a continuous and reliable production.
- Easy cleanability guaranteed by an automatic system: the cleaning switch activate the circulation and the rinse of water; at the end of the cycle just swithed again to start producing ice.
- Rounded internal corners of the bin assure ease of cleaning.
- The innovative anti-scale spray system with flexible nozzles avoids limescale deposits through small vibrations.

Construction

- Easy access to the main components for maintenance.
- Plug as standard (schuko type).
- AISI 304 stainless steel exterior.
- The sprayers are easy to take away, permit a simple flowing and prevent limestone formation.
- ON-OFF rocker switch.
- Adjustable 105-155mm feet.
- Internal ice containers in ABS.
- Reliability guaranteed by the quality of the construction materials used (front, top and sides in 304 AISI stainless steel) and the sophisticated product and process technology involved.
- Hygienical plastic spray arms removable without the use of tools.
- Aluminium evaporator ensures a safe contact with ice.
- Sturdy door opening system made in AISI 304 stainless steel.
- Supplied with flexible water supply, drain hoses and scoop.
- Integrated drain pump.

Sustainability

- Reduced energy consumption by fully insulated storage bin.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.

Optional Accessories

PNC Code	Description
Feet, wheels and ramps	
880692	Kit of 4 small black feet, 13mm (0/+22mm)
Other accessories	
0S1628	PURITY C150 QUELL KIT WITH OF FLOW METER
0S1629	PURITY C300 QUELL KIT WITH OF FLOW METER

Technical specifications

Electric

Supply voltage: 220-240 V/1N ph/50 Hz

Water:

Water outlet size: 25mm

Capacity:

Bin capacity: 20 kg

Key Information:

External dimensions, Width: 465 mm

External dimensions, Depth: 595 mm

External dimensions, Height: 849 mm

Net weight: 45 kg

Output: 47 kg/day

Kind of cube: Ice Cube 40 g


Sustainability

Refrigerant type: R290


Refrigerant weight: 70 g

Water consumption: 5.3 lt/hr


Front

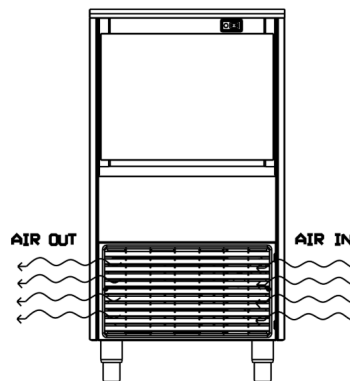

Side

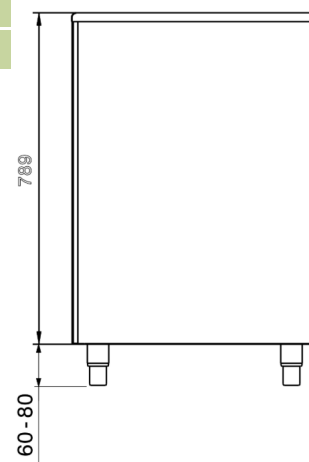

Top



CW1 = Cold Water inlet 1 (cleaning)

D = Drain

EI = Electrical inlet (power)