

**218895 (ZCOG202B3G31)**

Magistar Combi DS combi boiler oven with digital control, 20x2/1GN, gas, programmable, automatic cleaning, boiler in AISI 316L, 3-glass door

**Main Features**

- Single sensor core temperature probe included.
- Dry, hot convection cycle (25 °C - 300 °C): ideal for low humidity cooking.
- Combination cycle (25 °C - 300 °C): combining convected heat and steam to obtain humidity controlled cooking environment, accelerating the cooking process and reducing weight loss.
- Low temperature Steam cycle (25 °C - 99 °C): ideal for sous-vide, re-thermalization and delicate cooking. Steam cycle (100 °C): seafood and vegetables. High temperature steam (101 °C - 130 °C).
- Built-in steam generator for highly precise humidity and temperature control according to the chosen settings.
- Real humidity control based upon Lambda Sensor to automatically recognize quantity and size of food for consistent quality results.
- Automatic fast cool down and pre-heat function.
- Programs mode: a maximum of 100 recipes can be stored in the oven's memory, to recreate the exact same recipe at any time. 4-step cooking programs also available.
- EcoDelta cooking: cooking with food probe maintaining preset temperature difference between the core of the food and the cooking chamber.
- Pre-set program for Regeneration, ideal for banqueting on plate or rethermalizing on tray.
- Fan with 5 speed levels from 300 to 1500 RPM and reverse rotation for optimal evenness. Fan stops in less than 5 seconds when door is opened.
- Back-up mode with self-diagnosis is automatically activated if a failure occurs to avoid downtime.
- AirFlow air distribution system to achieve maximum performance in chilling/heating evenness and temperature control thanks to a special design of the chamber combined with high precision variable speed fan.
- OptiFlow air distribution system to achieve maximum performance in chilling/heating evenness and temperature control thanks to a special design of the chamber.
- GreaseOut: integrated grease drain and collection kit (to use the kit, the oven must be ordered as special code).
- Zanussi Professional recommends the use of treated water to guarantee optimal cooking results and extend the life of the appliance. Check local water condition to select the appropriate water filter. More info available on the website.
- Short cleaning cycle: optimized cleaning cycle with a duration of just 33 minutes, improving efficiency and reducing downtime.

**Construction**

- Boiler in 316L AISI to protect against corrosion.
- 304 AISI stainless steel construction throughout.
- IPX5 spray water protection certification for easy cleaning.
- Hygienic internal chamber with all rounded corners for easy cleaning.
- Triple thermo-glazed door with 2 hinged inside panels for easy cleaning and double LED lights line.
- Front access to control board for easy service.

## User Interface & Data Management

- USB port to download HACCP data, share cooking programs and configurations. USB port also allows to plug-in sous-vide probe (optional accessory).
- Digital interface with LED backlight buttons with guided selection.
- Connectivity for remote real time access, easy HACCP management, equipment uptime increase, consumption tracking and energy management (requires optional accessory).



# A focus on sustainability

## Sustainability

- Energy Star 2.0 certified product.
- Reduced power function for customized slow cooking cycles.
- Human centered design with 4-star certification for ergonomics and usability.
- C22 and C25 detergents are formulated without phosphates and phosphorus (C25 is also maleic acid-free), making them safe for both the environment and human health.
- The outer cardboard packaging is made from 70% recycled materials and FSC\*-certified paper, printed with eco-friendly, water-based ink to support sustainability and environmental responsibility. (\*Forest Stewardship Council is the world's leading organization for sustainable forest management).
- Triple-glass door minimize your energy loss.\* \*Approx. -10% of idle energy consumption in convection based on test in compliance with ASTM Standard F2861-20
- Save energy, water, detergent and rinse aid with green functions.
- Cooking Optimizer function organizes the cooking sequence of the chosen cycles optimizing the work in the kitchen from a time and energy efficiency point of view.

## Certifications & Recognitions



Product assessed by the manufacturer and deemed to meet EU safety, health, and environmental protection requirements.



International system for mutual acceptance of test reports and certificates concerning the safety of electrical and electronic components, equipment, and products.



Certification for **energy efficiency**, ensuring products meet strict standards for reducing energy consumption, saving money, and helping protect the environment.



Product acceptable for use in a commercial food establishment and meets applicable construction, performance, and material requirements.



Ensures compliance with the quality, safety, and performance requirements for placement in the Dutch market.



UL Verification is an independent, science-based process that validates marketing claims, helping distinguish verified facts from fiction.



# Technical specifications

## Electric

|                 |                      |
|-----------------|----------------------|
| Supply voltage: | 220-240 V/1 ph/50 Hz |
|-----------------|----------------------|

## Gas

|                                  |                     |
|----------------------------------|---------------------|
| Total thermal load:              | 402275 BTU (100 kW) |
| Gas Power:                       | 100 kW              |
| Standard gas delivery:           | Natural Gas G20     |
| ISO 7/1 gas connection diameter: | 1" MNPT             |

## Water:

|                                      |         |
|--------------------------------------|---------|
| Max inlet water supply temperature:  | 30 °C   |
| Chlorides:                           | <17 ppm |
| Conductivity:                        | 0 µS/cm |
| Drain "D":                           | 50mm    |
| Water inlet connections "CW11-CW12": | 3/4"    |
| Pressure, bar min/max:               | 1-6 bar |

## Capacity:

|                    |             |
|--------------------|-------------|
| Trays type:        | 20 - GN 2/1 |
| Max load capacity: | 200 kg      |


## Key Information:

|                              |         |
|------------------------------|---------|
| External dimensions, Width:  | 1162 mm |
| External dimensions, Depth:  | 1066 mm |
| Weight:                      | 391 kg  |
| External dimensions, Height: | 1794 mm |
| Net weight:                  | 391 kg  |
| Shipping weight (gross):     | 429 kg  |
| Shipping volume:             | 3.09 m³ |




## Installation drawings


Front

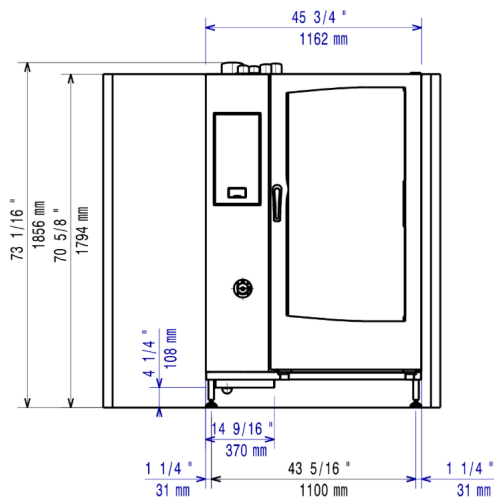


Side

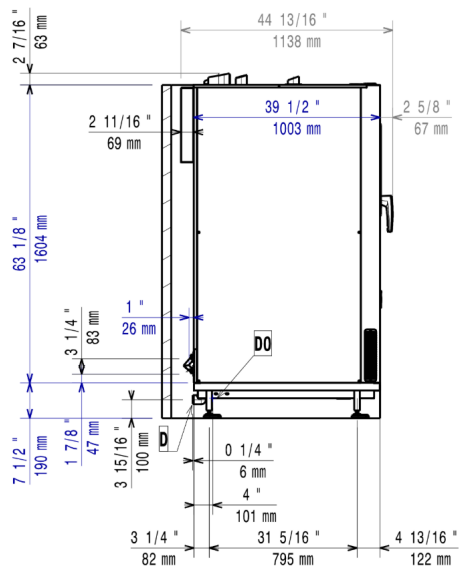

Top

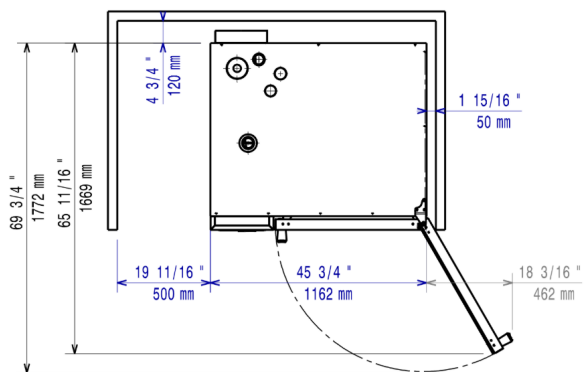

## Distances

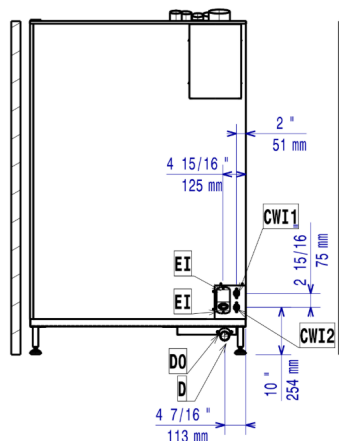

CWI1 = Cold Water inlet 1 (cleaning)

G = Gas connection

DO = Overflow drain pipe

D = Drain

El = Electrical inlet (power)

# Accessories

## Included Accessories

| PNC Code | Description                                  | Quantity |
|----------|----------------------------------------------|----------|
| 922757   | Trolley with tray rack 20 GN 2/1, 63mm pitch | 1        |

## Optional Accessories

| PNC Code | Description |
|----------|-------------|
|----------|-------------|

### Cleaning solutions

|        |                                                            |
|--------|------------------------------------------------------------|
| 922386 | Wall mounted detergent tank holder                         |
| 922618 | External connection kit for liquid detergent and rinse aid |

### Connectivity

|        |                                                                                                                                                                                         |
|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 922421 | IoT module for OnE Connected (combi ovens, blast chiller/freezers, rack type DW) and Match (one IoT board per appliance - to connect oven to the blast chiller for Cook&Chill process). |
|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

### Containers, trays and grids

|        |                                                                                       |
|--------|---------------------------------------------------------------------------------------|
| 922017 | Pair of AISI 304 stainless steel grids, GN 1/1                                        |
| 922036 | Pair of grids for whole chicken (8 per grid - 1,2kg each), GN 1/1                     |
| 922062 | AISI 304 stainless steel grid, GN 1/1                                                 |
| 922189 | Baking tray for 5 baguettes in perforated aluminum with silicon coating, 400x600x38mm |
| 922190 | Baking tray with 4 edges in perforated aluminum, 400x600x20mm                         |
| 922191 | Baking tray with 4 edges in aluminum, 400x600x20mm                                    |
| 922239 | Pair of frying baskets                                                                |
| 922264 | AISI 304 stainless steel bakery/pastry grid 400x600mm                                 |
| 922266 | Grid for whole chicken (8 per grid - 1,2kg each), GN 1/1                              |
| 922348 | Multipurpose hook                                                                     |
| 922362 | Grid for whole duck (8 per grid - 1,8kg each), GN 1/1                                 |
| 922651 | Dehydration tray, GN 1/1, H=20mm                                                      |
| 922652 | Flat dehydration tray, GN 1/1                                                         |
| 922713 | Mesh grilling grid, GN 1/1                                                            |
| 922746 | Tray for traditional static cooking, H=100mm                                          |
| 922747 | Double-face griddle, one side ribbed and one side smooth, 400x600mm                   |
| 925001 | Non-stick universal pan, GN 1/ 1, H=40mm                                              |
| 925002 | Non-stick universal pan, GN 1/1, H=60mm                                               |
| 925003 | Double-face griddle, one side ribbed and one side smooth, GN 1/1                      |
| 925004 | Aluminum grill, GN 1/1                                                                |
| 925005 | Frying pan for 8 eggs, pancakes, hamburgers, GN 1/1                                   |
| 925006 | Flat baking tray with 2 edges, GN 1/1                                                 |
| 925008 | Potato baker for 28 potatoes, GN 1/1                                                  |
| 925012 | Kit of 6 non-stick universal pans, GN 1/1, H=20mm                                     |
| 925013 | Kit of 6 non-stick universal pans, GN 1/1, H=40mm                                     |
| 925014 | Kit of 6 non-stick universal pan GN 1/1, H=60mm                                       |



# Accessories

| PNC Code                              | Description                                                                                                                   |
|---------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| <b>Drains</b>                         |                                                                                                                               |
| 922738                                | Stainless steel drain kit for 20 GN oven, dia=50mm                                                                            |
| <b>Feet, wheels and ramps</b>         |                                                                                                                               |
| 922688                                | 4 high adjustable feet for 6 & 10 GN ovens, 100-115MM                                                                         |
| 922707                                | 4 flanged feet for 20 GN , 2", 150mm                                                                                          |
| 922716                                | Levelling entry ramp for 20 GN 2/1 oven                                                                                       |
| <b>Food probes</b>                    |                                                                                                                               |
| 922390                                | USB single point probe                                                                                                        |
| 922714                                | Probe holder for liquids                                                                                                      |
| <b>Grease/oil management</b>          |                                                                                                                               |
| 922357                                | Grease collection tray, GN 2/1, H=60 mm                                                                                       |
| <b>Handling - bakery</b>              |                                                                                                                               |
| 922762                                | Bakery/pastry trolley with rack holding 400x600mm grids for 20 GN 2/1 oven and blast chiller freezer, 80mm pitch (16 runners) |
| <b>Handling - banqueting</b>          |                                                                                                                               |
| 922367                                | Thermal cover for 20 GN 2/1 oven and blast chiller freezer                                                                    |
| 922760                                | Banquet trolley with rack holding 92 plates for 20 GN 2/1 oven and blast chiller freezer, 85mm pitch                          |
| 922764                                | Banquet trolley with rack holding 116 plates for 20 GN 2/1 oven and blast chiller freezer, 66mm pitch                         |
| <b>Handling - gastronom</b>           |                                                                                                                               |
| 922686                                | Trolley with tray rack, 15 GN 2/1, 84mm pitch                                                                                 |
| 922757                                | Trolley with tray rack 20 GN 2/1, 63mm pitch                                                                                  |
| 922758                                | Trolley with tray rack, 16 GN 2/1, 80mm pitch                                                                                 |
| <b>Installation solutions</b>         |                                                                                                                               |
| 922658                                | Heat shield for 20 GN 2/1 oven                                                                                                |
| 922670                                | Kit to convert from natural gas to LPG                                                                                        |
| 922671                                | Kit to convert from LPG to natural gas                                                                                        |
| 922739                                | Plastic drain kit for 20 GN oven, dia=50mm                                                                                    |
| <b>Kit compatibility air-o-system</b> |                                                                                                                               |
| 922770                                | Kit compatibility for aos/easyline trolley (produced till 2019) with SkyLine/Magistar 20 GN 2/1 combi oven                    |
| 922771                                | Kit compatibility for aos/easyline 20 GN oven with SkyLine/Magistar trolleys                                                  |
| <b>Other accessories</b>              |                                                                                                                               |
| 922338                                | Smoker for lengthwise and crosswise oven                                                                                      |
| <b>Spray units</b>                    |                                                                                                                               |
| 922171                                | External side spray unit (needs to be mounted outside and includes support to be mounted on the oven)                         |
| <b>Ventilation</b>                    |                                                                                                                               |
| 922678                                | Flue condenser for gas oven                                                                                                   |
| <b>Wall mounting kits</b>             |                                                                                                                               |
| 922687                                | Kit to fix oven to the wall                                                                                                   |

# Accessories

| PNC Code                 | Description                                                                                          |
|--------------------------|------------------------------------------------------------------------------------------------------|
| <b>Water treatment</b>   |                                                                                                      |
| 864388                   | External reverse osmosis filter for single tank Dishwashers with atmosphere boiler and Ovens         |
| 920003                   | Water filter with cartridge and flow meter for high steam usage (combi used mainly in steaming mode) |
| 920005                   | Water filter with cartridge and flow meter for medium steam usage                                    |
| <b>Other accessories</b> |                                                                                                      |
| 922326                   | Universal skewer rack                                                                                |
| 922328                   | 6 short skewers                                                                                      |
| 922435                   | Connectivity router (WiFi and LAN)                                                                   |
| 922447                   | Elevating kit with trolley height extension for 20 GN 2/1 oven                                       |
| 922448                   | Baking tray with 4 edges in perforated aluminum, coated surface, 400x600x20mm                        |
| 922449                   | Baking tray with 4 edges in aluminum, coated surface, 400x600x20mm                                   |
| 922773                   | Water inlet pressure reducer                                                                         |

