

**372014 (Z7ECED2R00)**

2-hot plate (2,6 kW each) electric boiling top

Main Features

- IPx4 water protection.
- The special design of the control knob system guarantees against water infiltration.
- The two 2.6kW cast-iron plates are hermetically sealed to the one-piece top.
- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- Suitable for countertop installation.

Construction

- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- One piece pressed 1.5 mm work top in Stainless steel.
- External panel in Stainless Steel with Scotch Brite finish.

Optional Accessories

PNC Code	Description
Bridge supports	
206137	Support for bridge type installation, 800 mm
206138	Support for bridge type installation, 1000 mm
206139	Support for bridge type installation, 1200 mm
206140	Support for bridge type installation, 1400 mm
206141	Support for bridge type installation, 1600 mm
206154	Support for bridge type installation, 400 mm
Chimney upstands	
206303	Chimney upstand, 400 mm
206400	Chimney grid net, 400mm

PNC Code	Description
Handrails	
206166	Frontal handrail 400 mm
206167	Frontal handrail 800 mm
206185	Large handrail (portioning shelf) 400 mm
206186	Large handrail (portioning shelf) 800 mm
206191	Frontal handrail 1200 mm
206192	Frontal handrail 1600 mm
206240	Right and left side handrails
206308	Back handrail 800 mm
Installation solutions	
206086	Junction sealing kit
Panels	
206320	2 side covering panels, height 250 mm, depth 700 mm
Water taps	
206289	Water column with swivel arm (water column extension not included)
206291	Water column extension

Technical specifications


Electric

Supply voltage:	380-400 V/3 ph/50-60 Hz
Total Watts:	5.2 kW


Key Information:

Net weight:	20 kg
Shipping weight (gross):	23.8 kg
Shipping height:	550 mm
Shipping width:	460 mm
Shipping depth:	820 mm
Shipping volume:	0.21 m³
Certification group:	EH72T
Front Plates Power:	2.6 - 0 kW
Back Plates Power:	2.6 - 0 kW
Front Plates dimensions:	Ø 230
Back Plates dimensions:	Ø 230


Front

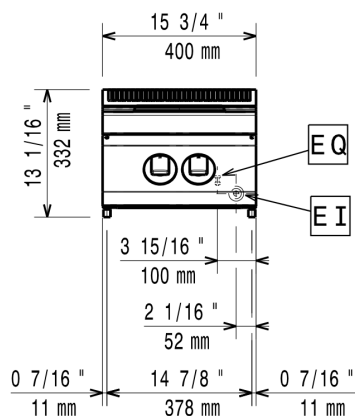

Side

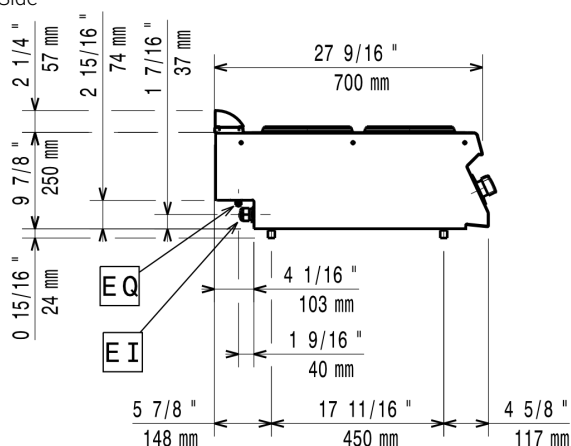

Top

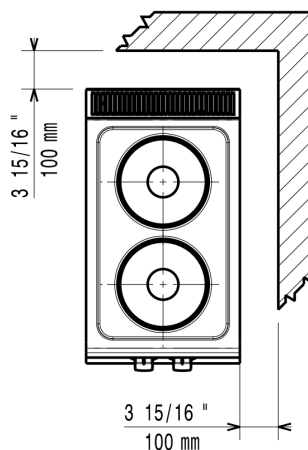

EI = Electrical inlet (power)

EQ = Equipotential screw

