

**372025 (Z7IREH4000)**

4-zone (2,2 kW each) infrared cooking top

Main Features

- Ceramic glass top cooking surface with 4 infrared heating zones 6 mm thick.
- Immediate heat transfer from cooking top to pan.
- IPx4 water protection.
- Low heat dissipation to the kitchen.
- The circular concentric heating sections measuring 230 mm give uniform heat also to the largest pan.
- The cooking top is sealed to prevent infiltration inside the unit.
- The smooth glass-ceramic surface can be quickly and easily cleaned, thus providing maximum hygiene.
- Warning light to indicate residual surface heat.
- Heating via ultra high powered heating elements.
- Suitable for countertop installation.

Construction

- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- One piece pressed 1.5 mm work top in Stainless steel.
- All exterior panels in Stainless Steel with Scotch Brite finishing.

Sustainability

- Energy regulation of each zone.

Optional Accessories

PNC Code	Description
Bridge supports	
206137	Support for bridge type installation, 800 mm
206138	Support for bridge type installation, 1000 mm
206139	Support for bridge type installation, 1200 mm
206140	Support for bridge type installation, 1400 mm
206141	Support for bridge type installation, 1600 mm
Chimney upstands	
206304	Chimney upstand, 800 mm
206400	Chimney grid net, 400mm
Handrails	
206167	Frontal handrail 800 mm
206186	Large handrail (portioning shelf) 800 mm
206191	Frontal handrail 1200 mm
206192	Frontal handrail 1600 mm
206240	Right and left side handrails
206308	Back handrail 800 mm
Installation solutions	
206086	Junction sealing kit
Panels	
206320	2 side covering panels, height 250 mm, depth 700 mm
Water taps	
206291	Water column extension

Technical specifications


Electric

Supply voltage:	380-400 V/3N ph/50/60 Hz
Total Watts:	8.8 kW
Predisposed for:	380-400V 3N~ 50/60Hz 7,4-8,8kW


Key Information:

Net weight:	35 kg
Shipping weight (gross):	40 kg
Shipping height:	520 mm
Shipping width:	820 mm
Shipping depth:	860 mm
Shipping volume:	0.37 m³
Certification group:	N7CIE
Front Plates Power:	2.2 - 2.2 kW
Back Plates Power:	2.2 - 2.2 kW
Front Plates dimensions:	Ø 230 Ø 230
Back Plates dimensions:	Ø 230 Ø 230


Front

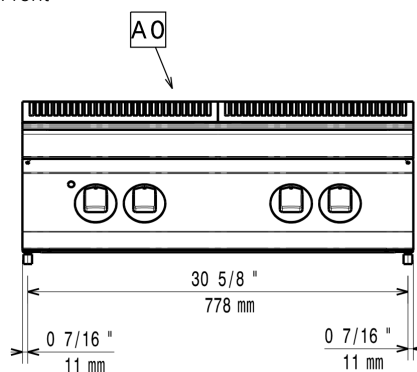

Side

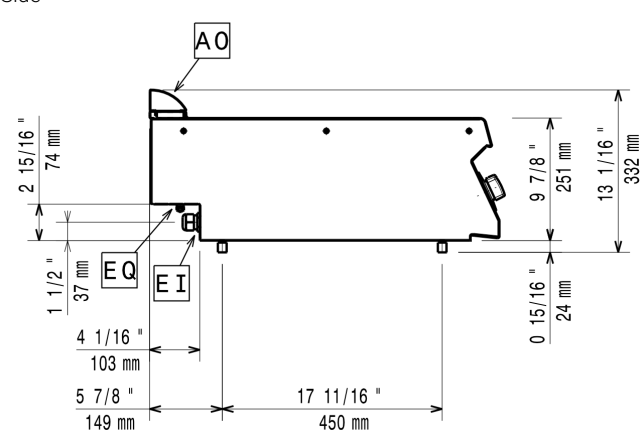

Top

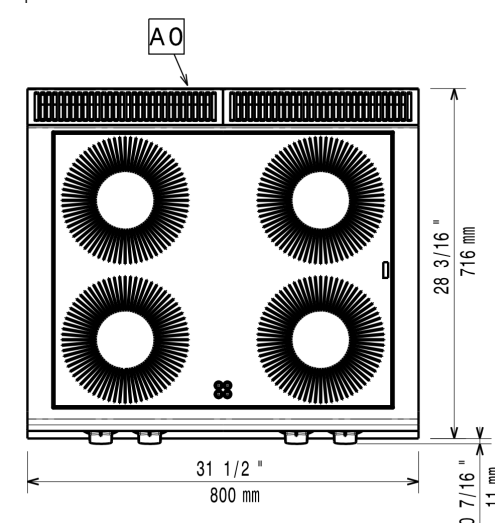

EI = Electrical inlet (power)

EQ = Equipotential screw

