

**Modular Cooking Range Line
EVO900 Full Module Electric Fry
Top, Smooth Polished Chrome Plate**

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____

**392073 (Z9FTEHCS00)**

Electric fry top with polished chrome smooth cooking plate, sloped, thermostatic control, splashback and scraper included, full module

Short Form Specification**Item No.** _____

Smooth polished chrome cooking surface. To be installed on open base installations, bridging supports or cantilever systems. Removable drawer below the cooking surface for the collection of grease and fat. Body and work top of unit entirely in stainless steel with Scotch Brite finish. Extra strength work top in heavy duty 2 mm stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- Large drain hole on cooking surface permits the draining of fat into large 1 liter collector placed under the cooking surface.
- Electric elements in incoloy positioned under the cooking plate.
- Safety thermostat and thermostatic control.
- Units have separate controls for each half module of the cooking surface.
- Stainless steel high splash guards on the rear and sides of cooking surface. Splash guards can be easily removed for cleaning and are dishwasher-safe.
- Cooking surface 15mm thick polished chrome for optimum grilling results and ease of use.
- The special design of the control knob system guarantees against water infiltration.
- IPX5 water protection.
- Temperature range from 120° up to 280°C.
- Polished chromium surface avoids the mixing of flavors when passing from one type of food to another.
- Suitable for countertop installation.

Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- AISI 304 stainless steel worktop, 2mm thick.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Unit is 900mm deep to give a larger working surface area.
- Cooking surface completely smooth.

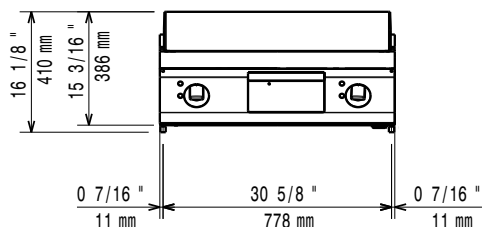
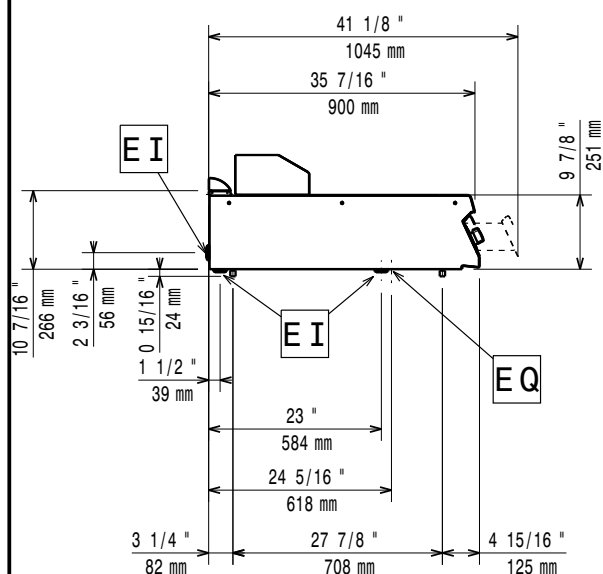
APPROVAL: _____

Included Accessories

- 1 of Scraper for smooth plate for fry tops PNC 164255

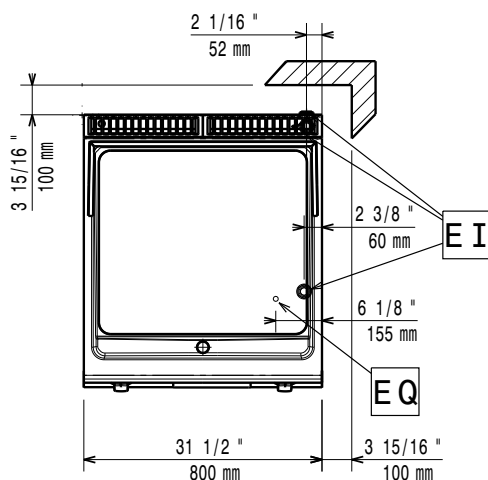
Optional Accessories

- | | | |
|---|------------|--------------------------|
| • Scraper for smooth plate for fry tops | PNC 164255 | ☐ |
| • Junction sealing kit | PNC 206086 | ☐ |
| • Support for bridge type installation, 800 mm | PNC 206137 | ☐ |
| • Support for bridge type installation, 1000 mm | PNC 206138 | ☐ |
| • Support for bridge type installation, 1200 mm | PNC 206139 | ☐ |
| • Support for bridge type installation, 1400 mm | PNC 206140 | ☐ |
| • Support for bridge type installation, 1600 mm | PNC 206141 | ☐ |
| • Side handrail for right/left hand | PNC 206165 | ☐ |
| • Frontal handrail 800 mm | PNC 206167 | ☐ |
| • Large handrail (portioning shelf) 800 mm | PNC 206186 | ☐ |
| • Frontal handrail 1200 mm | PNC 206191 | ☐ |
| • Frontal handrail 1600 mm | PNC 206192 | ☐ |
| • 2 side covering panels, height 250 mm, depth 900 mm | PNC 206321 | ☐ |
| • Grease/oil container kit for frytops | PNC 206346 | ☐ |
| • Chimney grid net, 400mm | PNC 206400 | ☐ |
| • Cloche for fry tops | PNC 206455 | ☐ |
| • Water drain for full module fry top | PNC 216153 | ☐ |

Front

Side


EI = Electrical inlet (power)

EQ = Equipotential screw

Top

Electric

Supply voltage: 380-400 V/3 ph/50-60 Hz

Predisposed for:

Electrical power, max: 15 kW

Total Watts: 15 kW

Key Information:

Working Temperature MIN: 120 °C

Working Temperature MAX: 280 °C

External dimensions, Width: 800 mm

External dimensions, Depth: 900 mm

External dimensions, Height: 250 mm

Net weight: 90.5 kg

Shipping weight: 100 kg

Shipping height: 540 mm

Shipping width: 1020 mm

Shipping depth: 860 mm

Shipping volume: 0.47 m³

Certification group: EFT92

Cooking surface width: 730 mm

Cooking surface depth: 700 mm

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.