

**392346 (Z9GREDGS0P)**

Electric grill top, half module - HP

Main Features

- Incoloy armoured heating elements positioned under the cooking grid.
- Power indicator light.
- Each bank of elements has an independent power regulation through a control knob.
- Heating elements tilt 90° for easy cleaning.
- Removable 2mm thick steel U-shaped grids in AISI 441 stainless steel for fast heating of cooking surface.
- Fixed well with drain to collect residual cooking juices and grease.
- Large drain protected by overflow and filter.
- Water must be added to well before operation.
- Water filling tap with knob control.
- Removable stainless steel deflectors to recuperate heat and reduce cooking time.
- Stainless steel splash guards on sides of cooking surface. Splash guards can be easily removed for cleaning.
- Top configuration allows installation on ambient base or refrigerated/freezer base.
- Led warning indicator to give an alarm when well is empty.
- Suitable for countertop installation.

Construction

- Unit is 900mm deep to give a larger working surface area.

Included Accessories

PNC Code	Description	Quantity
206436	Scraper for HP electric grill	1

Optional Accessories

PNC Code	Description
Bridge supports	
206137	Support for bridge type installation, 800 mm
206138	Support for bridge type installation, 1000 mm
206139	Support for bridge type installation, 1200 mm
206140	Support for bridge type installation, 1400 mm
206141	Support for bridge type installation, 1600 mm
206154	Support for bridge type installation, 400 mm
Cleaning solutions	
206436	Scraper for HP electric grill
Drains	
206437	Drain extension for electric grill HP
Handrails	
206165	Side handrail for right/left hand
206166	Frontal handrail 400 mm
206167	Frontal handrail 800 mm
206185	Large handrail (portioning shelf) 400 mm
206186	Large handrail (portioning shelf) 800 mm
206191	Frontal handrail 1200 mm
206192	Frontal handrail 1600 mm
Installation solutions	
206086	Junction sealing kit
Other accessories	
206321	2 side covering panels, height 250 mm, depth 900 mm

Technical specifications


Electric

Supply voltage:	380-400 V/3N ph/50/60 Hz
Predisposed for:	380-400V 3N~ 50/60Hz 5.4-5.8kW


Key Information:

External dimensions, Width:	400 mm
External dimensions, Depth:	900 mm
External dimensions, Height:	250 mm
Net weight:	52 kg
Shipping weight (gross):	51 kg
Shipping height:	400 mm
Shipping width:	500 mm
Shipping depth:	1020 mm
Shipping volume:	0.2 m³
Certification group:	HEG9E1
Cooking surface width:	345 mm
Cooking surface depth:	598 mm


Front



Side

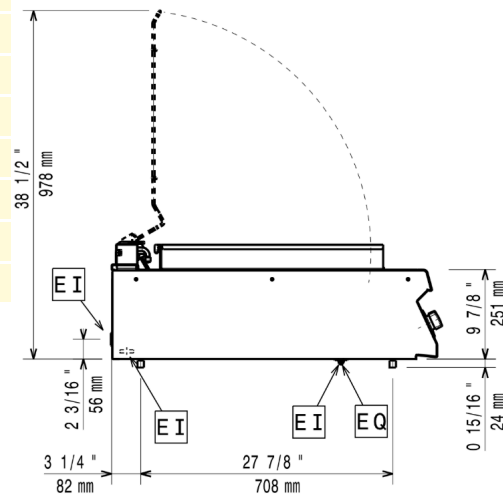

Top

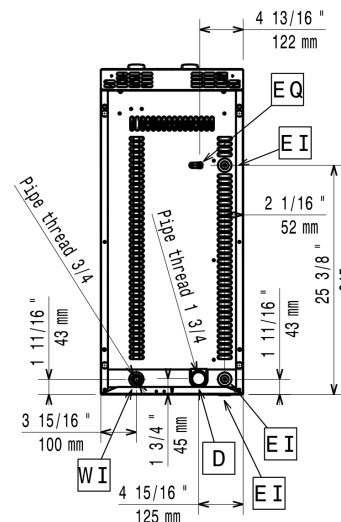

D = Drain

EI = Electrical inlet (power)

EQ = Equipotential screw



Part of



**Electrolux
Professional
Group**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

www.zanussiprofessional.com

2026/07/15

3/3