

**402191 (ZTGWSG1S)**

Undercounter glasswasher (S), 400x400mm rack, electronic, single skin with pressure boiler, rinse aid+detergent pumps, drain pump, tank filters, 40 r/h, 1 phase, Schuko plug

What the OnE Connected App can do for you?

- **Connect:** Manage your undercounter dishwasher anytime with seamless Bluetooth connectivity.
- **Control:** Gain instant insights into consumptions and savings directly from your mobile.
- **Customize:** Choose the cycle that best fits your needs, or create a personalized one, to ensure spotless results every time.

Main Features

- Deep drawn pressed wash tank with fully rounded corners, sloped towards the drain to prevent dirt build up provides fast drainage in only a few minutes. Pressed wash tank with no welded points offer a guaranteed water tight solution.
- Built-in pressure boiler designed to raise incoming water to a guaranteed minimum temperature of 82°C for sanitizing rinse. No external boiler is required.
- Washing system endowed with rotating washing arms, high powered wash pump and large capacity wash tank for professional washing.
- Maximum capacity of 40 racks per hour.
- Suitable to fit 400*400 mm racks.
- Simple operation control panel with digital display, led info lights; and color-coded main button to launch the washing cycles.
- Featured with n°4 washing cycle, 90 / 120 / 180 / 540 seconds, selectable by the display and customizable on site by service; to wash different kind of crockery.
- Built-in rinse aid and detergent dispenser with automatic chemicals loading, for perfect result while minimizing service and maintenance needs.
- Equipped with drain pump, to easily adjust the discharge height in case of wall plumbing; avoiding wastewater returns.
- Equipped with electrical cable fitting schuko plug.
- Easy service access to all the main components from the front of the appliance, to fast on site operation.

Construction

- Completely closed on the back by a cover plate.
- Structure, panels, cavity and door in stainless steel to long lasting.
- Insulated double skin counter-balanced door construction for silent and smooth operation. Counter-balance mechanism minimizes impact when opening and closing.
- Upper and lower screwed washing & rinsing arms and tank filters in composite material; are easy removable from the cavity to easy operation.
- Unit to feature rinse aid and detergent dispenser peristaltic pumps.

Sustainability

- Clear water consumption of 2 liter/rack, the water of the rinsing phase is recirculated to enable washing.
- Low noise level of 61 db during operations.
- Eco stand-by energy management function, to reduce power usage on inactive period.

Included Accessories

PNC Code	Description	Quantity
864470	Square basket for glasses 400x400x150mm	1
867048	Insert for 12 saucers, 290x90x75mm	1
867049	Square cutlery container, 89x113x113mm	1

Optional Accessories

PNC Code	Description
Baskets	
867039	Square basket for plates, 400x400x110mm
867047	Round basket for glasses, 400x180mm
867069	Inclination insert for glasses 400x400 mm
Installation solutions	
864496	Kit wash tank filters in composite material (1 central support and 2 filters) for single skin Z-Active 100 (S) glasswasher
864497	Drain pump kit for single skin Z-Active 100 (S) glasswasher
867085	Kit detergent dispenser for single skin Z-Active 100 (S) glasswasher
Other accessories	
864473	ROUND BASKET SUPPORT FOR GLASSWASHER (S)
867044	Inclination insert for glasses, 400x400mm
867080	[NOT TRANSLATED]

Recommended Detergents

PNC Code	Description
0S2092	DETERGENT FOR DISHWASHERS C11 2PCSx5L
0S2093	ECODETERGENT C13 2pzx5L CASSA BOX-4G
0S2094	RINSE AID FOR DISHWASHERS C12 2pzx5L ADR & IMDG Limited Quantity
0S2281	C11 DETERGENT FOR DISHWASHERS; 20L CAN
0S2362	C30-MULTIPURPOSE DESCALER; 2PCS x 5L; ADR & IMDG LIMITED QUANTITY
0S2904	C15 ECO RINSE AID; 2PZ X 5L; ADR & IMDG & IATA LIMITED QUANTITY

Technical specifications

Electric

Supply voltage:	220-240 V/1 ph/50 Hz
Default Installed Power:	2.7 kW
Boiler heating elements:	2.7 kW
Tank heating elements:	2.4 kW
Wash pump size:	0.2 kW

Water:

Water supply temperature*:	10-50 °C
Drain line size:	29mm
Washing tank capacity (lt):	12
Water consumption per cycle (lt):	0 / 2
Boiler Capacity (lt):	3
Pressure, bar min/max:	2-5 bar
Incoming water line size:	3/4"


Key Information:

Wash temperature:	60°C
Rinse temperature:	85 °C
External dimensions, Width:	455 mm
External dimensions, Depth:	550 mm
External dimensions, Height:	700 mm
Net weight:	38 kg
Shipping weight (gross):	42 kg
Shipping height:	850 mm
Shipping width:	540 mm
Shipping depth:	630 mm
Shipping volume:	0.29 m³
Baskets per hour*:	40 / 30 / 20 / 6


Sustainability

Noise level:	61 dBA
--------------	--------


Front

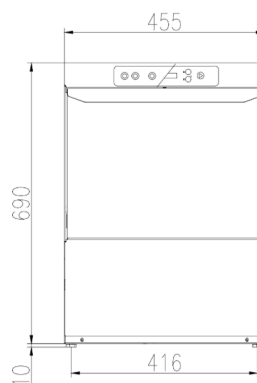

Side

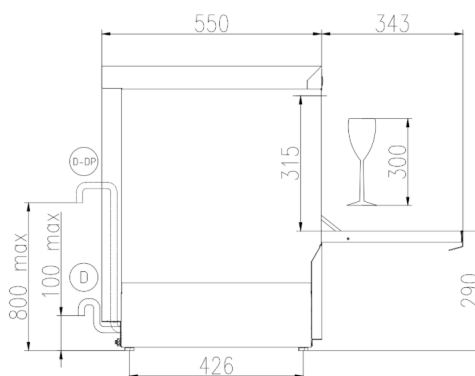

Rear side



CWI1 = Cold Water inlet 1 (cleaning)

D = Drain

EI = Electrical inlet (power)

XD = Detergent connection

EO = Electrical Outlet