

**372076 (Z7FREH2B00)**

7+7-lt electric fryer top with 2 "V" shape wells (external heating elements), 2 baskets and lids included

Main Features

- All major compartments located in front of unit for ease of maintenance.
- Deep drawn V-Shaped wells.
- IPx4 water protection.
- Oil drains through a tap positioned on the front the wells.
- Overheat protection thermostat as standard on all units.
- Thermostatic regulation of oil temperature up to a maximum of 185 °C.
- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- High efficiency infrared heating elements are attached to the outside of the wells.
- Optional portable oil quality monitoring tool (code 9B8081) for efficient oil management.
- Suitable for countertop installation.

Construction

- Interior of well with rounded corners for ease of cleaning.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- One piece pressed 1.5 mm work top in Stainless steel.
- All exterior panels in Stainless Steel with Scotch Brite finishing.

Sustainability

- This model is compliant with Swiss Energy Efficiency Ordinance (730.02).

Included Accessories

PNC Code	Description	Quantity
921608	Basket for 7lt top and free standing fryers	2

Optional Accessories


PNC Code	Description
Baskets	
921608	Basket for 7lt top and free standing fryers
Bridge supports	
206137	Support for bridge type installation, 800 mm
206138	Support for bridge type installation, 1000 mm
206139	Support for bridge type installation, 1200 mm
206140	Support for bridge type installation, 1400 mm
206141	Support for bridge type installation, 1600 mm
Chimney upstands	
206304	Chimney upstand, 800 mm
206400	Chimney grid net, 400mm
Handrails	
206167	Frontal handrail 800 mm
206186	Large handrail (portioning shelf) 800 mm
206191	Frontal handrail 1200 mm
206192	Frontal handrail 1600 mm
206240	Right and left side handrails
206308	Back handrail 800 mm
Installation solutions	
206086	Junction sealing kit
Panels	
206320	2 side covering panels, height 250 mm, depth 700 mm

Technical specifications


Electric

Supply voltage:	380-400 V/3N ph/50-60 Hz
Total Watts:	10.8 kW
Key Information:	
Usable well dimensions (width):	240 mm
Usable well dimensions (height):	235 mm
Usable well dimensions (depth):	380 mm
Well capacity:	5.5 lt MIN; 7 lt MAX
Thermostat Range:	105 °C MIN; 185 °C MAX
Net weight:	40.5 kg
Shipping weight (gross):	49 kg
Shipping height:	540 mm
Shipping width:	820 mm
Shipping depth:	860 mm
Shipping volume:	0.38 m³
Certification group:	EFE72M07


Front

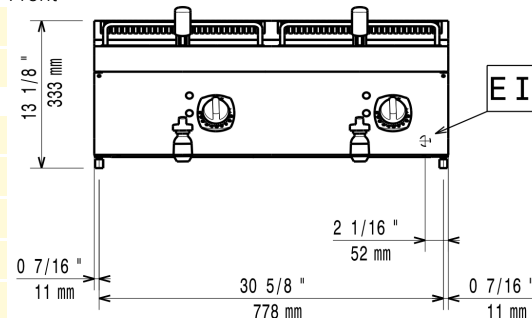

Side

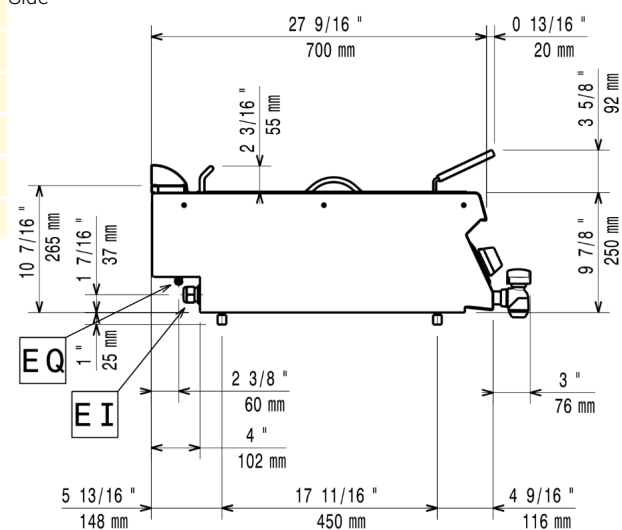

Top

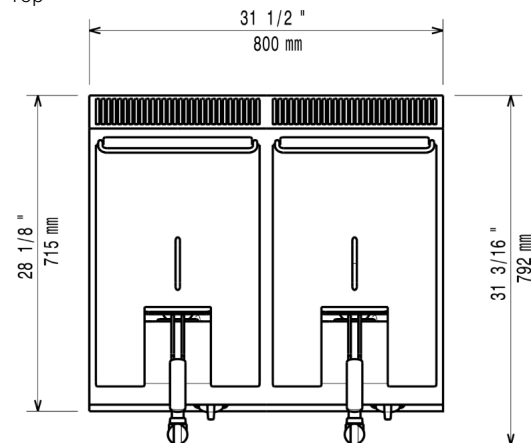

EI = Electrical inlet (power)

EQ = Equipotential screw

DO = Overflow drain pipe

