

**321009 (FSL07C2)**

Bain-marie unit with beech wood finish (2 GN container capacity)

Main Features

- Electronic overheating protection.
- Optional tilting plinth can be installed to cover the feet or the wheels.
- Panels and hinged doors on the operator side, for quick, easy and hygienic storage, and have a beech wood finish.
- Wells in 304 AISI stainless steel with drain holes and pipes and with rounded corners to facilitate cleaning operations.
- Thermostatically controlled temperature can be set from +60 to +90°C, at ambient temperature, following HACCP rules.
- The two tray slides are constructed in plain 304 AISI stainless steel and can be folded down to facilitate passage of the units through doorways.
- Tempered glass overshelf with cold lights included for an elegant and safe presentation of the food.
- The well dimensions allow the storage of 1/1 GN containers (2 in the model 750 mm in length, 3 in the model 1125 mm in length and 4 in the model 1500 mm in length) or various combinations of containers, all with a maximum height of 200 mm (available as accessories).

Construction

- 304 AISI stainless steel top with rounded edges.
- Unit mounted on four wheels, 150 mm in height (two with brakes), but can be mounted on 150 mm high feet (as special).

Optional Accessories

PNC Code	Description
Kicking strips	
852003	Kit of plinth for wheels, for 2 GN container capacity units
Other accessories	
852031	ELECTRICAL SOCKET FOR 2 PLUGS
852032	OVER HEAD POWER SUPPLY
852053	WATER FILLING AND OVERFLOW
852054	S/S COVER PLATE GN1/1 FOR BAINMARIE
852061	DIVIDER FRAME KIT GN1/1
852062	DIVIDER BAR GN1/2
852063	ELEVATION GRILL 300X480X120MM
Tray sliders	
852042	TRAY SLIDE GABLE 1060X200
852068	S/S TRAY SLIDER 750MM-WIDTH 200-270MM
852074	S/S TRAY SLIDER 750MM-WIDTH 280-300MM
Other accessories	
852026	OVER STRUCTURE WITH HOT LIGHT 750MM
852034	OVER HEAD POWER SUPPLY W/ ADJ.STAND PIPE
852056	BREAD-BASKET OVER SHEL LED LIGHT 750MM
852064	ADJUSTABLE LEG, MARINE
852113	REMOVABLE OVERSHELF S/S 750MM
852133	OTHER LAMINATE COLOURS FOR UNITS 750MM

Technical specifications

Electric

Supply voltage: 230 V/1 ph/50/60 Hz

Electrical power max.: 1 kW

Key Information:

External dimensions, Width: 750 mm

External dimensions, Depth: 1060 mm

External dimensions, Height: 1300 mm

Net weight: 60 kg


Well width: 630 mm

Well depth: 510 mm


Well height: 210 mm

Well/top temperature: 60°/90° C


Front

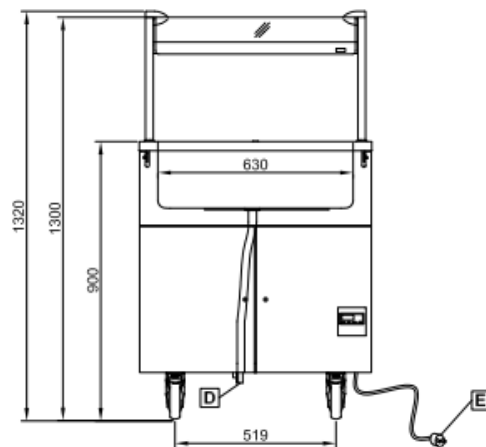

Side

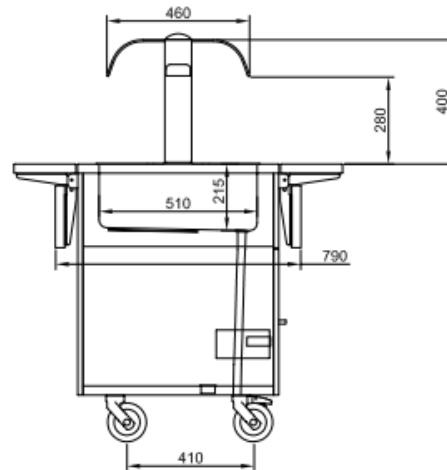

Top

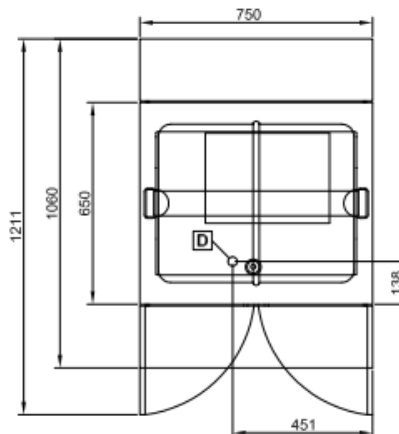

D = Drain

EI = Electrical inlet (power)

