

**322036 (F19C2AW00S)**

Refrigerated well on cupboard with refrigerated display, compact (2 GN container capacity) with wheels, overshelf with LED lights and two stainless steel tray sliders, H=900mm (Nordic)

Main Features

- Perfect compact design makes it ideal for space saving environments.
- CB and CE certified by a third party notified body.
- Soft closing doors on operator side.
- Underneath ambient cupboard with doors ideal for extra storage.
- Available options with online configurator: colors, tray sliders, overshelves, feet/wheels with desired diameter, height 750mm for kids.
- Optional plinth can be installed to cover the feet or the wheels.
- AISI 304 Tray slider in flush mounted stainless steel is installed on long sides and they can also be folded down to facilitate passage of the units through doorways.
- Ideal for servery lines without an operator.
- Unit mounted on 125 mm wheels 2 swivel and 2 with brakes.
- Suitable for GN 1/1 containers with a maximum height of 200 mm.
- Precise temperature control and setting at 0,1°C .
- As standard the product comes with digitally controlled thermostat which is in line of HACCP norms and provides visual alarm as a warning of the increasing or decreasing temperatures.
- Food introduced at the correct temperature maintains its core temperature according to Afnor Standards.
- Automatic defrosting guarantees evaporators clearance and efficient well cooling.
- The unit is composed of two refrigeration systems: a static cooled well on the bottom and evaporator with fan on the top.
- Bottom well is designed to serve the food in GN containers or bottles and cans.
- The display is illuminated by inside LED light under each glass shelf that emphasizes the cold food colors.
- The temperature uniformity is guaranteed by fans and an high surface evaporator placed at the top of the unit.
- The configuration allows a compact footprint and excellent preservation performances.
- Plexiglass display case with lift-up doors on both sides to ensure maximum hygiene of the food.
- Includes 2 adjustable shelves composed of two grids each. The shelves can be adjusted in height to allocate different items.
- Available dimensions: 2, 3, 4 GN.

Construction

- Well bottom is inclined to facilitate water drainage.
- Top in AISI 304.
- Sturdy construction with laminated panelings on 4 sides.
- Well in 304 AISI stainless steel with rounded corners to facilitate cleaning operations. The well is also equipped with a drain hole.
- Electronic control with temperature display.
- IPx2 water protection.

Sustainability

- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- High-density expanded polyurethane foam with cyclopentane guarantees excellent well insulation to reduce energy dispersion.
- Short sides and the top are in double glazed low emission glass (18 mm thick) to improve insulation avoiding formation of the condensation and reducing energy consumption.

Optional Accessories

PNC Code	Description
----------	-------------

Feet, wheels and ramps

800002	Kit 4 height adjustable flanged feet, Marine
--------	--

Kicking strips

800004	Kicking strip for 2 GN units (not for Bain-Marie with separated wells)
--------	--

Recommended Detergents

PNC Code	Description
----------	-------------

0S2881	S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T
--------	---

0S2883	S03 ALCOHOL BASE DETERGENT; 6 BOTTLES X 750ML; ADR&IMDG&IATA Limited Quantity
--------	---

0S2884	S04 GLASSES & HARD SURFACES CLEANERS; 6 BOTTLES X 750ML
--------	---

0S3257	S05 - MULTIPURPOSE DEGREASER; 6PCS X 750ML; ADR&IMDG Limited Quantity
--------	---

Technical specifications

Electric

Supply voltage: 220-240 V/1N ph/50 Hz

Key Information:

N° of doors: 1

External dimensions, Width: 770 mm

External dimensions, Depth: 1180 mm

External dimensions, Height: 1605 mm

Net weight: 188 kg

Shipping height: 1635 mm

Shipping width: 810 mm

Shipping depth: 899 mm

Shipping volume: 1.19 m³


Set temperature: +4 / +8 °C

Top temperature: +4 / +8 °C


Sustainability

Noise level: 64 dBA


Front

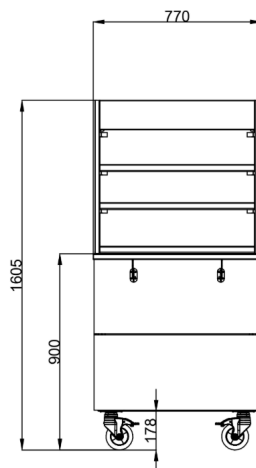

Side

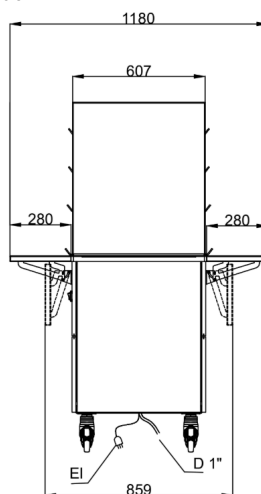

Top

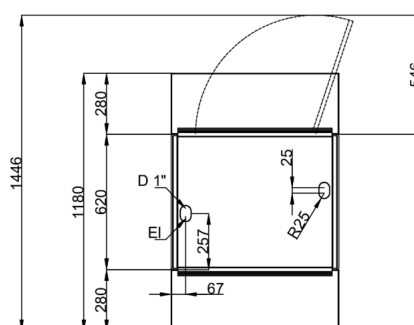

D = Drain

EI = Electrical inlet (power)