

**322079 (F02H3AF01W)**

Bain-marie on cupboard, three wells (3 GN container capacity) with overshelf with LED lights and one stainless steel tubular tray slider on customer side, H=900mm

**Main Features**

- Electronic overheating protection.
- Perfect compact design makes it ideal for space saving environments.
- CB and CE certified by a third party notified body.
- Tray slider in tubular stainless steel is installed on the customer side and it can also be folded down to facilitate passage of the units through doorways.
- Ideal for servery lines with an operator.
- Unit mounted on 150 mm high feet.
- Soft closing doors on operator side.
- Underneath ambient cupboard with doors ideal for extra storage.
- Available options with online configurator: colors, tray sliders, overshelves, feet/wheels with desired diameter, height 750mm for kids.
- Stylish L type overshelf designed for extra increased visibility on the surface for charming food display.
- Overshelf equipped with LED lights.
- Optional plinth can be installed to cover the feet or the wheels.
- Designed to serve the food in gastronorm containers.
- Suitable for GN 1/1 containers with a maximum height of 200 mm.
- Precise temperature control and setting at 0,1°C .
- As standard the product comes with digitally controlled thermostat which is in line of HACCP norms and provides visual alarm as a warning of the increasing or decreasing temperatures.
- It is possible to transform one of the GNs to soup dispenser with the available accessory.
- Available drop-in dimensions: 2, 3, 4 GN.
- Wells bottom are inclined to guarantee full well drainage.
- Food introduced at the correct temperature maintains its core temperature according to Afnor Standards.
- Available dimensions: 2, 3, 4 GN.
- Thanks to the sleek, minimalist glass structure, food and dust does not get trapped and the cleaning is made easier.
- Designed to work with both hot and cold water.

## Construction

- Heating elements connected to the well bottom include safety thermostat.
- IPx4 water protection.
- Overshelf in complete AISI 304.
- Top in AISI 304.
- Sturdy construction with laminated panelings on 4 sides.
- Well in 304 AISI stainless steel with rounded corners to facilitate cleaning operations. The well is also equipped with a drain hole.
- Electronic control with temperature display.

## Sustainability

- Etched foil heating elements to maximize heat transmission for reduced warm-up times.
- 19mm thick rock wool isolated with galvanize sheet guarantees excellent well insulation to reduce energy dispersion.
- Equipped with separated GN 1/1 wells to minimize water and electricity usage allowing to operate only the needed wells. Each well can be switched on/off independently.

## Optional Accessories

| PNC Code                      | Description                                                             |
|-------------------------------|-------------------------------------------------------------------------|
| <b>Feet, wheels and ramps</b> |                                                                         |
| 800002                        | Kit 4 height adjustable flanged feet, Marine                            |
| <b>Kicking strips</b>         |                                                                         |
| 800007                        | Kicking strip for 3 GN units (only for Bain-Marie with separated wells) |

## Recommended Detergents

| PNC Code | Description                                                                   |
|----------|-------------------------------------------------------------------------------|
| 0S2881   | S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T                   |
| 0S2883   | S03 ALCOHOL BASE DETERGENT; 6 BOTTLES X 750ML; ADR&IMDG&IATA Limited Quantity |
| 0S2884   | S04 GLASSES & HARD SURFACES CLEANERS; 6 BOTTLES X 750ML                       |
| 0S3257   | S05 - MULTIPURPOSE DEGREASER; 6PCS X 750ML; ADR&IMDG Limited Quantity         |

# Technical specifications

## Electric

|                        |                          |
|------------------------|--------------------------|
| Supply voltage:        | 220-240 V/1N ph/50/60 Hz |
| Electrical power max.: | 3.04 kW                  |

## Water:

|                  |      |
|------------------|------|
| Drain line size: | 3/4" |
|------------------|------|


## Key Information:

|                              |              |
|------------------------------|--------------|
| N° of doors:                 | 2            |
| External dimensions, Width:  | 1150 mm      |
| External dimensions, Depth:  | 915 mm       |
| External dimensions, Height: | 1304 mm      |
| Net weight:                  | 115 kg       |
| Shipping height:             | 1470 mm      |
| Shipping width:              | 750 mm       |
| Shipping depth:              | 1190 mm      |
| Shipping volume:             | 1.31 m³      |
| Set temperature:             | +85 / +95 °C |
| Height adjustment:           | 5/60 mm      |


## Sustainability

|              |        |
|--------------|--------|
| Noise level: | 45 dBA |
|--------------|--------|


Front

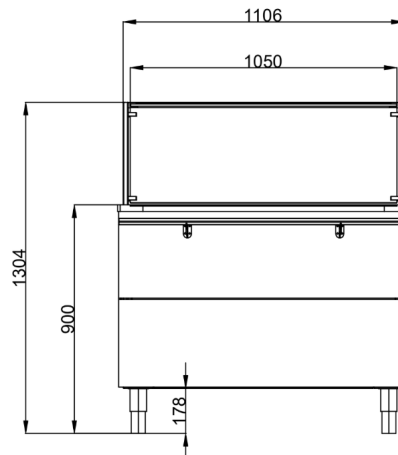

Side

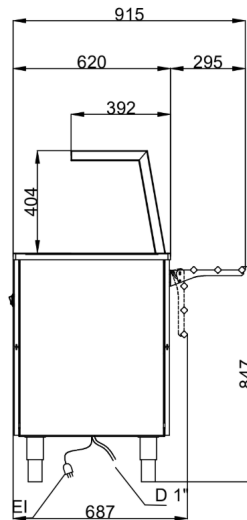

Top

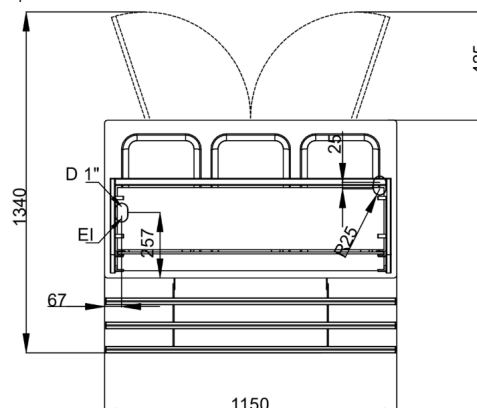

D = Drain

El = Electrical inlet (power)