

**341181 (D04C3)**

Drop-in Tempered Glass Top (3 GN container capacity) with one A type overshelf predisposed for hot lamps

Main Features

- Electronic overheating protection.
- CB and CE certified by a third party notified body.
- Stylish A type overshelf designed for extra increased visibility on the surface for charming food display.
- Designed to be positioned in flush installation providing improved cleanability and suitable for modern design installations.
- Precise temperature control and setting at 0,1°C .
- As standard the product comes with digitally controlled thermostat which is in line of HACCP norms and provides visual alarm as a warning of the increasing or decreasing temperatures.
- Designed to serve the food in plates, casseroles, pans
- It comes with stylish black coloured tempered heated glass with integrated etched foil elements and stainless steel framed.
- Special design etched foil heating elements to maximize heat transmission on the surface for having the same temperature on the whole surface.
- Ideal for elegant buffet to display warm food, such as pizza, bun, etc. thanks to the extended surface top.
- Food introduced at the correct temperature maintains its core temperature according to Afnor Standards.

Construction

- IPx4 water protection.
- Overshelf in complete AISI 304.
- Electronic control with temperature display.
- AISI 304 Stainless steel frame with rounded corners to facilitate cleaning operations
- Heating elements connected to the bottom include safety thermostat.

Optional Accessories

PNC Code	Description
Lights and lamps	
922454	Food warming lamp for overshelves - 4pcs

Recommended Detergents

PNC Code	Description
0S2881	S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T
0S2883	S03 ALCOHOL BASE DETERGENT; 6 BOTTLES X 750ML; ADR&IMDG&IATA Limited Quantity
0S2884	S04 GLASSES & HARD SURFACES CLEANERS; 6 BOTTLES X 750ML
0S3257	S05 - MULTIPURPOSE DEGREASER; 6PCS X 750ML; ADR&IMDG Limited Quantity

Technical specifications

Electric

Supply voltage: 220-240 V/1N ph/50/60 Hz

Key Information:

External dimensions, Width: 1100 mm

External dimensions, Depth: 620 mm

External dimensions, Height: 484 mm

Net weight: 38.1 kg

Shipping weight (gross): 68 kg

Shipping height: 800 mm

Shipping width: 670 mm

Shipping depth: 1140 mm


Shipping volume: 0.61 m³

Set temperature: +105 / +115 °C


Sustainability

Noise level: dBA


Front

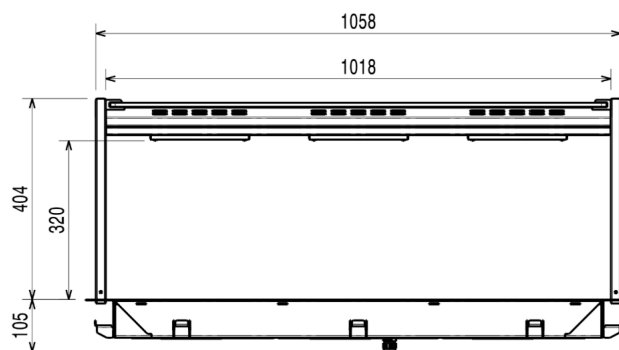

Side



Top

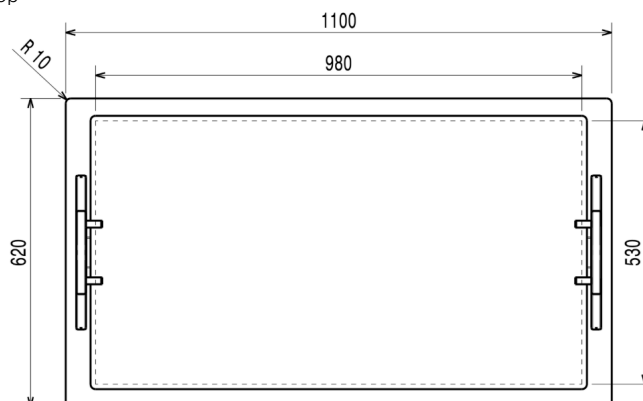

EI = Electrical inlet (power)

ED = Remote electrical connection

RI = Refrigerant Inlet