

**341182 (D04C4)**

Drop-in Tempered Glass Top (4 GN container capacity) with one A type overshelf predisposed for hot lamps

Main Features

- Electronic overheating protection.
- CB and CE certified by a third party notified body.
- Stylish A type overshelf designed for extra increased visibility on the surface for charming food display.
- Designed to be positioned in flush installation providing improved cleanability and suitable for modern design installations.
- Precise temperature control and setting at 0,1°C .
- As standard the product comes with digitally controlled thermostat which is in line of HACCP norms and provides visual alarm as a warning of the increasing or decreasing temperatures.
- Designed to serve the food in plates, casseroles, pans
- It comes with stylish black coloured tempered heated glass with integrated etched foil elements and stainless steel framed.
- Special design etched foil heating elements to maximize heat transmission on the surface for having the same temperature on the whole surface.
- Ideal for elegant buffet to display warm food, such as pizza, bun, etc. thanks to the extended surface top.
- Food introduced at the correct temperature maintains its core temperature according to Afnor Standards.

Construction

- IPx4 water protection.
- Overshelf in complete AISI 304.
- Electronic control with temperature display.
- AISI 304 Stainless steel frame with rounded corners to facilitate cleaning operations
- Heating elements connected to the bottom include safety thermostat.

Optional Accessories

PNC Code	Description
Lights and lamps	
922454	Food warming lamp for overshelves - 4pcs

Recommended Detergents

PNC Code	Description
0S2881	S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T
0S2883	S03 ALCOHOL BASE DETERGENT; 6 BOTTLES X 750ML; ADR&IMDG&IATA Limited Quantity
0S2884	S04 GLASSES & HARD SURFACES CLEANERS; 6 BOTTLES X 750ML
0S3257	S05 - MULTIPURPOSE DEGREASER; 6PCS X 750ML; ADR&IMDG Limited Quantity

Technical specifications

Electric


Supply voltage:	220-240 V/1N ph/50/60 Hz
-----------------	--------------------------

Key Information:

External dimensions, Width:	1420 mm
External dimensions, Depth:	620 mm
External dimensions, Height:	484 mm
Net weight:	45.35 kg
Shipping weight (gross):	73 kg
Shipping height:	910 mm
Shipping width:	670 mm
Shipping depth:	1480 mm
Shipping volume:	0.9 m³
Set temperature:	+105 / +115 °C

Sustainability

Noise level:	dBA
--------------	-----

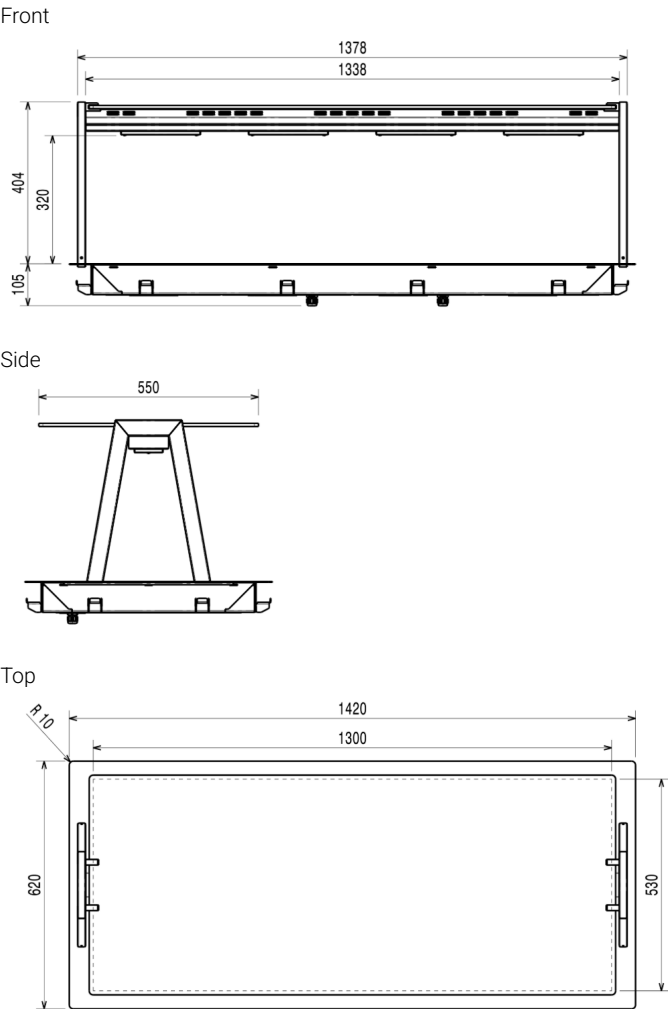

EI = Electrical inlet (power)
ED = Remote electrical connection
RI = Refrigerant Inlet