

**402234 (ZSICWP)**

Glasswasher (small), with double skin, electronic control, cold rinse, built-in water softener, drain pump and rinse aid dispenser, 3 cycles, 30b/h

Main Features

- Incorporated Soft Start feature to offer additional protection to more delicate items.
- Built-in rinse aid dispenser with automatic initial and continuous cycle loading for perfect result while minimizing service and maintenance needs.
- Low noise level.
- Equipped with drain pump for easy and quick installation without opening the machine.
- Extra program to cold rinse beer and wine glasses providing sanitized glasses, cool enough to handle.
- Equipped with water softener to ensure optimal rinsing results.
- Built-in pressure boiler designed to raise incoming water to a guaranteed minimum temperature of 82°C for sanitizing rinse. No external boiler is required.
- Maximum capacity of 30 racks per hour.
- Equipped with single phase electrical cable and Schuko plug for easy and fast installation.
- Washing system endowed with rotating washing arms from both top and bottom, high powered wash pump and large capacity wash tank guarantee professional washing.
- Easy service access to main components without moving the unit.
- New electronic control panel for easy setup of the working parameters and self diagnosis.
- 120/300/120 seconds cycle, the third cycle includes cold rinse.
- Optional rinse booster pump available to be installed on site.

Construction

- Completely closed on the back by a cover plate.
- Unit to feature rinse aid dispenser pump.
- Wash/rinse arms and nozzles in stainless steel.
- Finished in top quality stainless steel with double skinned construction to aid durability and reduce noise.
- Internal components (arms and filter) are easy extractable.
- Large tank filter collects the soil to keep the wash water clean for a longer time and have better washing performance.
- Deep drawn pressed wash tank with fully rounded corners, sloped towards the drain to prevent dirt buildup, provides fast drainage in just a few minutes. With no welding points the pressed tank offers a guaranteed water tight solution.
- 304 AISI stainless steel front panel, load bearing frame, wash tank, tank filter, wash and rinse arms.

Sustainability

- Insulated double skin door construction preserves heat inside the tank to lower energy consumption and the noise. Counter-balance mechanism minimizes impact when opening and closing.

Included Accessories

PNC Code	Description	Quantity
864003	Stainless steel tank filter for glasswashers	1
864470	Square basket for glasses 400x400x150mm	1

Optional Accessories

PNC Code	Description
Baskets	
864242	Yellow cutlery container
865574	Set of 4 yellow cutlery containers
867016	Cover grid for small/light items in rack
867033	Basket for glasses (395x395x115)
867048	Insert for 12 saucers, 290x90x75mm
867052	Basket for 16 plates diam.190 mm, 8 plates diam. 240 mm
867053	Basket for glasses, h. 100 mm
867054	Basket for glasses, h. 200 mm
867055	Basket for glasses and saucers/cutlery inserts
867056	Basket for 16 glasses, h. 200 mm with angled base
867057	Round basket kit with square frame
867058	Insert for "flute" glasses
867060	Insert for 14 saucers for CEB 100/200
867061	Inclined insert for cups
867062	Insert for 7 plates diam. 240 mm

Installation solutions

864051	Rinse booster pump kit for single tank pressure dishwasher
864461	Pressure reducer for single tank dishwasher
864469	Kit detergent dispenser

Water treatment

860005	External automatic water softener - 8 lt
860412	External manual water softener - 12 lt
860430	External manual water softener - 20 lt
864050	Kit to measure total/partial water hardness
864367	Filter for total demineralization



Warewashing
Small Double Skin GW, elec control, cold rinse,
water softener, drain pump and rinse aid disp, 30b/h

Recommended Detergents

PNC Code	Description
0S2092	DETERGENT FOR DISHWASHERS C11 2PCSX5L
0S2093	ECODETERGENT C13 2pzx5L CASSA BOX-4G
0S2094	RINSE AID FOR DISHWASHERS C12 2pzx5L ADR & IMDG Limited Quantity
0S2281	C11 DETERGENT FOR DISHWASHERS; 20L CAN
0S2362	C30-MULTIPURPOSE DESCALER; 2PCS x 5L; ADR & IMDG LIMITED QUANTITY
0S2904	C15 ECO RINSE AID; 2PZ X 5L; ADR & IMDG & IATA LIMITED QUANTITY

Technical specifications

Electric

Supply voltage:	220-240 V/1 ph/50 Hz
Default Installed Power:	3.3 kW
Boiler heating elements:	3 kW
Tank heating elements:	0,8 kW
Wash pump size:	0.3 kW

Water:

Water supply temperature*:	10-55 °C
Drain line size:	27mm
Washing tank capacity (lt):	6
Water consumption per cycle (lt):	0 / 2.3
Boiler Capacity (lt):	5
Pressure, bar min/max:	1.8-3 bar
Incoming water line size:	G 3/4"


Key Information:

Wash temperature:	55-65°C
Rinse temperature:	80-90 °C
External dimensions, Width:	460 mm
External dimensions, Depth:	565 mm
External dimensions, Height:	715 mm
Net weight:	37 kg
Shipping weight (gross):	45 kg
Shipping height:	880 mm
Shipping width:	620 mm
Shipping depth:	520 mm
Shipping volume:	0.28 m³


Sustainability

Noise level:	61 dBA
--------------	--------


Front

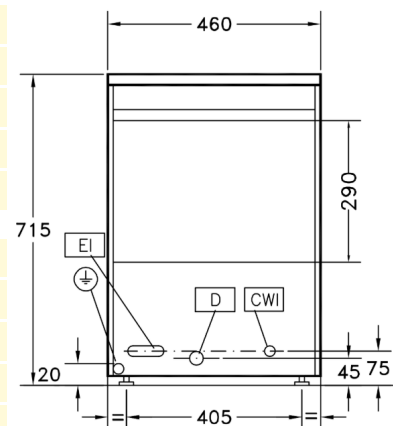

Side

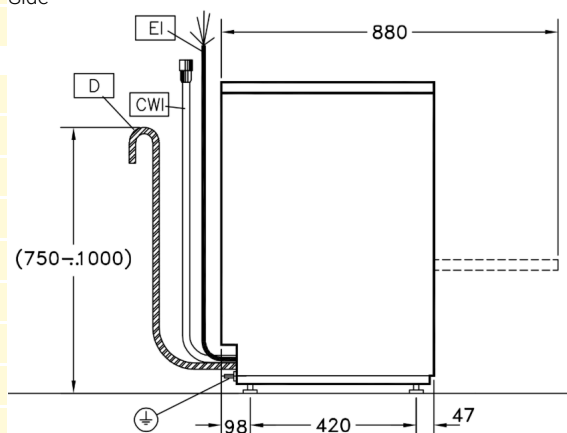

Top

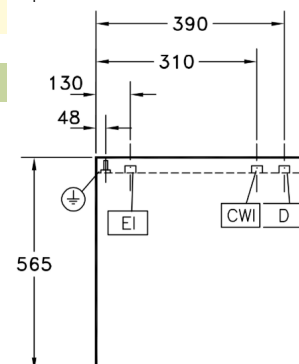

CWI1 = Cold Water inlet 1 (cleaning)

D = Drain

EI = Electrical inlet (power)

XD = Detergent connection

EO = Electrical Outlet

