

**402238 (ZSDIAG)**

Glasswasher (small), with ACTIVE Guaranteed Rinse System, insulated double skin, electronic control, built-in drain pump, detergent and rinse aid dispensers, 3 cycles, 30b/h

Main Features

- Incorporated Soft Start feature to offer additional protection to more delicate items.
- Constant temperature of 84 °C throughout the rinsing cycle regardless of the network's water pressure and temperature.
- Built-in rinse aid and detergent dispenser with automatic initial and continuous cycle loading for perfect result while minimizing service and maintenance needs.
- Deep drawn pressed wash tank with fully rounded corners, sloped towards the drain to prevent dirt build up provides fast drainage in only a few minutes. Pressed wash tank with no welded points offer a guaranteed water tight solution.
- Double skinned insulated wall ensures a low noise level and a reduction in heat loss from the machine.
- Low noise level.
- Equipped with drain pump for easy and quick installation without opening the machine.
- Green light of Guaranteed Rinse System (ACTIVE) confirms that items have been rinsed properly.
- Built-in atmospheric boiler sized to raise incoming water to 84 °C minimum for sanitizing rinse. No external booster is required.
- Maximum capacity of 30 racks per hour.
- Equipped with single phase electrical cable and Schuko plug for easy and fast installation.
- Washing system endowed with rotating washing arms from both top and bottom, high powered wash pump and large capacity wash tank guarantee professional washing.
- Easy service access to main components without moving the unit.
- New electronic control panel for easy setup of the working parameters and self diagnosis.

Construction

- Completely closed on the back by a cover plate.
- Unit to feature rinse aid and detergent dispenser pumps.
- Wash/rinse arms and nozzles in stainless steel.
- Finished in top quality stainless steel with double skinned construction to aid durability and reduce noise.
- Internal components (arms and filter) are easy extractable.
- Large tank filter collects the soil to keep the wash water clean for a longer time and have better washing performance.
- 304 AISI stainless steel front panel, load bearing frame, wash tank, tank filter, wash and rinse arms.

Sustainability

- Insulated double skin door construction preserves heat inside the tank to lower energy consumption and the noise. Counter-balance mechanism minimizes impact when opening and closing.

Included Accessories

PNC Code	Description	Quantity
864003	Stainless steel tank filter for glasswashers	1
864470	Square basket for glasses 400x400x150mm	1

Optional Accessories

PNC Code	Description
Baskets	
864242	Yellow cutlery container
865574	Set of 4 yellow cutlery containers
867016	Cover grid for small/light items in rack
867033	Basket for glasses (395x395x115)
867048	Insert for 12 saucers, 290x90x75mm
867052	Basket for 16 plates diam. 190 mm, 8 plates diam. 240 mm
867053	Basket for glasses, h. 100 mm
867054	Basket for glasses, h. 200 mm
867055	Basket for glasses and saucers/cutlery inserts
867056	Basket for 16 glasses, h. 200 mm with angled base
867057	Round basket kit with square frame
867058	Insert for "flute" glasses
867060	Insert for 14 saucers for CEB 100/200
867061	Inclined insert for cups
867062	Insert for 7 plates diam. 240 mm

Installation solutions

864461	Pressure reducer for single tank dishwasher
--------	---

Water treatment

860005	External automatic water softener - 8 lt
860412	External manual water softener - 12 lt
860430	External manual water softener - 20 lt
864017	Filter for partial demineralization
864050	Kit to measure total/partial water hardness
864367	Filter for total demineralization
864388	External reverse osmosis filter for single tank Dishwashers with atmosphere boiler and Ovens

Recommended Detergents

PNC Code	Description
0S2092	DETERGENT FOR DISHWASHERS C11 2PCSx5L
0S2093	ECODETERGENT C13 2pzx5L CASSA BOX-4G
0S2094	RINSE AID FOR DISHWASHERS C12 2pzx5L ADR & IMDG Limited Quantity
0S2281	C11 DETERGENT FOR DISHWASHERS; 20L CAN
0S2362	C30-MULTIPURPOSE DESCALER; 2PCS x 5L; ADR & IMDG LIMITED QUANTITY
0S2904	C15 ECO RINSE AID; 2PZ X 5L; ADR & IMDG & IATA LIMITED QUANTITY

Technical specifications

Electric

Supply voltage:	220-240 V/1 ph/50 Hz
Default Installed Power:	3.3 kW
Boiler heating elements:	3 kW
Tank heating elements:	0,8 kW
Wash pump size:	0.3 kW

Water:

Water supply temperature*:	10-55 °C
Drain line size:	22mm
Washing tank capacity (lt):	6
Water consumption per cycle (lt):	0 / 0
Boiler Capacity (lt):	5
Pressure, bar min/max:	1.8-3 bar
Incoming water line size:	G 3/4"


Key Information:

Wash temperature:	55-65°C
Rinse temperature:	80-90 °C
External dimensions, Width:	460 mm
External dimensions, Depth:	565 mm
External dimensions, Height:	715 mm
Net weight:	37 kg
Shipping weight (gross):	49 kg
Shipping height:	880 mm
Shipping width:	650 mm
Shipping depth:	530 mm
Shipping volume:	0.3 m³


Sustainability

Noise level:	61 dBA
--------------	--------


Front

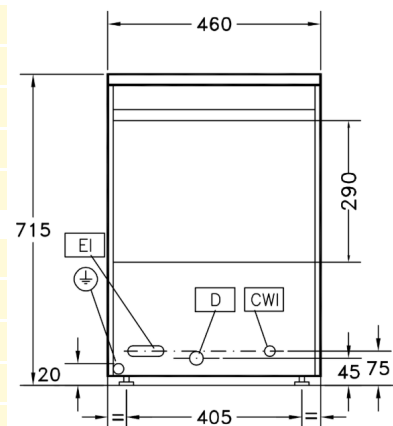

Side

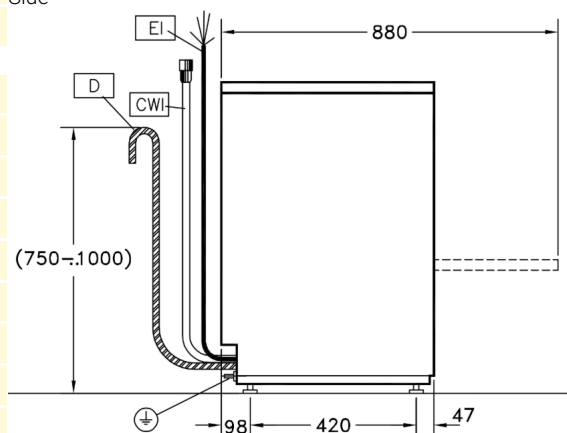

Top

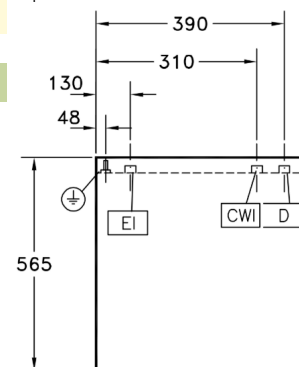

CWI1 = Cold Water inlet 1 (cleaning)

D = Drain

EI = Electrical inlet (power)

XD = Detergent connection

EO = Electrical Outlet

