

**534411 (NCDSRE56)**

Corner drying zone for single rinse Rack Type dishwasher, 50Hz & 60Hz

Main Features

- Electronically controlled to optimize drying results.
- Full accessibility to the interior of the tunnel and hygienic design to facilitate cleaning.
- Drying zone removes most of water from the crockery through a high powered fan that extracts dry air from outside mixing it with the internal air, thus providing dry plates at a temperature cool enough to handle safely.
- Dryer must always be ordered with a 90° or 180° dishwashing driven curve.
- IP25 protection against water jets, solid objects and small animals (larger than 6 mm).
- The feeding direction can be either left to right or right to left as it's reversible on site.
- All main components made in heavy duty anti-corrosive 304 type stainless steel: internal chamber, external, front and side panels and rack transportation system.
- Unit to be placed between single rinse rack type dishwasher and handling system.

Construction

- The chamber is pressed with fully rounded corners without internal pipes and therefore no hidden dirt traps.



A focus on sustainability

Sustainability

- The unit is built on modularity concept to easily connect with single-rinse rack type dishwasher without any modification including power connection.

Certifications & Recognitions



International system for mutual acceptance of test reports and certificates concerning the safety of electrical and electronic components, equipment, and products.



Product assessed by the manufacturer and deemed to meet EU safety, health, and environmental protection requirements.

Technical specifications

Electric

Supply voltage:	380-415 V/3N ph/50/60 Hz
Default Installed Power:	4.4 kW
Dryer heating elements:	[[TechSpec].fDInstPower VALUE NOT FOUND] kW
Drying fan power:	[[TechSpec].sDFanP VALUE NOT FOUND] kW

Key Information:

External dimensions, Width:	872 mm
External dimensions, Depth:	872 mm
External dimensions, Height:	877 mm
Charging hole size (width):	[[TechSpec].fChargeHoleW VALUE NOT FOUND] mm
Charging hole size (height):	[[TechSpec].fChargeHoleH VALUE NOT FOUND] mm
Net weight:	40 kg
Shipping weight (gross):	53 kg
Shipping height:	1020 mm
Shipping width:	930 mm
Shipping depth:	940 mm
Shipping volume:	0.89 m³
Dryer air flow:	[[TechSpec].sDFanCap VALUE NOT FOUND] m³/h
Dryer air temperature:	[[TechSpec].sDAirTemp VALUE NOT FOUND] °C


Sustainability

Noise level:	<62 dBA
--------------	---------




Installation drawings


Front

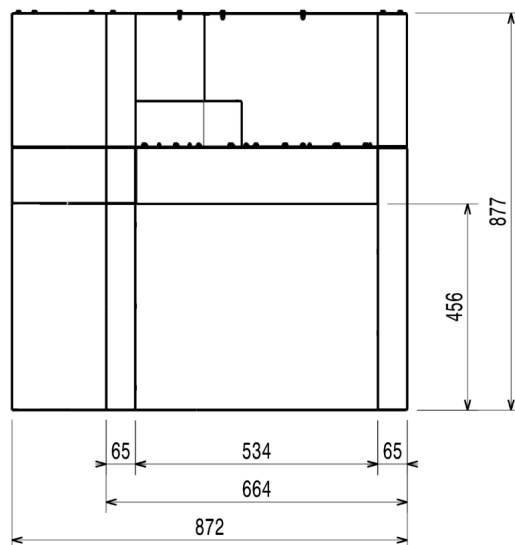

Side

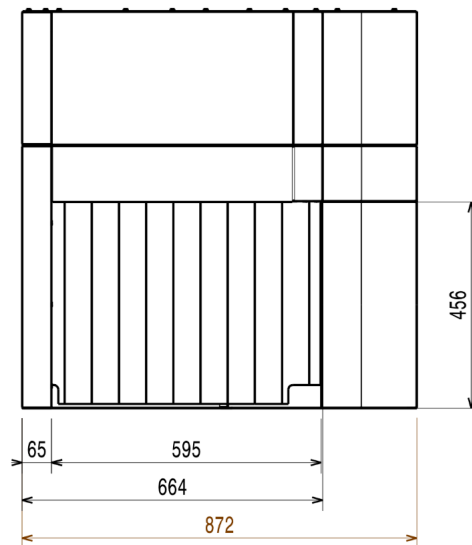

Top

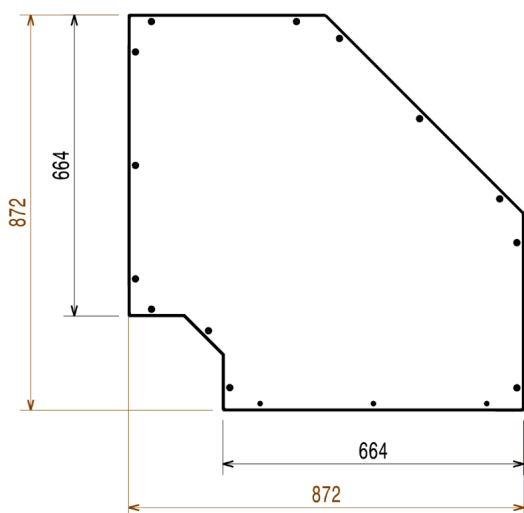

El = Electrical inlet (power)
EO = Electrical Outlet
U = USB port

EQ = Equipotential screw
CWI = Cold Water Inlet
ES = Electrical signal IN/OUT