

**535175 (NMPWDREL5)**

Medium pre-wash zone for dual rinse rack type dishwasher, Left>Right, reversible direction on-site

Main Features

- IP25 protection against water jets, solid objects and small animals (larger than 6 mm).
- Built-in drain valve in the tanks allows automatic dump and fill to refresh the water in the tank without any interruption of the washing process.
- Pre-wash section uses cold water so food remains are not "baked" onto the plates in order to have better pre-wash performance.
- Manual process of pre-wash spraying replaced by automatic prewash module before the main wash section.
- The feeding direction can be either left to right or right to left as it's reversible on site.
- Large counter balanced inspection door allows unrestricted all-round access to the internal area. Door is insulated with injected foam. This adds strength as well as reduces noise and heat loss.
- Automatic drain, clean and sanitize cycles featured as standard. The internal chamber, including the internal door is completely cleaned or sanitized avoiding bacteria proliferation for maximum hygiene and reducing manual work/time for operator.
- Deep drawn pressed tank with fully rounded corners, sloped towards the drain to prevent dirt build-up, provides fast drainage in just a few minutes. With no welding points the pressed tank offers a guaranteed water tight solution.
- The unit must be connected with dual rinse rack type dishwasher.

Construction

- Adjustable feet for full access underneath the machine for cleaning.
- All main components made in heavy duty anti-corrosive 304 type stainless steel: internal chamber, external, front and side panels, pre-wash arms and rack transportation system.
- The unit is built on modularity concept to easily connect with dual rinse rack type dishwasher without any modification including power, inlet water, drain water, detergent and rinse aid connections.

Sustainability

- Auto-start/stop ensures that the zone runs only when a rack is passing through it. This reduces both water, energy consumption and noise.
- Multi-stage advanced filtering system removes soil from the pre-wash water providing cleaner water thus ensuring better washing performance.



Warewashing

**Medium pre-wash zone for dual rinse rack type
dishwasher, reversible, electric, 50Hz**

Optional Accessories

PNC Code	Description
Installation solutions	
865281	Kit to convert pre-wash module to wash module

Technical specifications

Electric

Supply voltage:	380-415 V/3N ph/50 Hz
Default Installed Power:	7.37 kW


Key Information:

External dimensions, Width:	560 mm
External dimensions, Depth:	825 mm
External dimensions, Height:	1785 mm
Net weight:	104 kg
Shipping weight (gross):	130 kg
Shipping height:	2010 mm
Shipping width:	1000 mm
Shipping depth:	680 mm
Shipping volume:	1.37 m³


Sustainability

Noise level:	<62 dBA
--------------	---------


Front

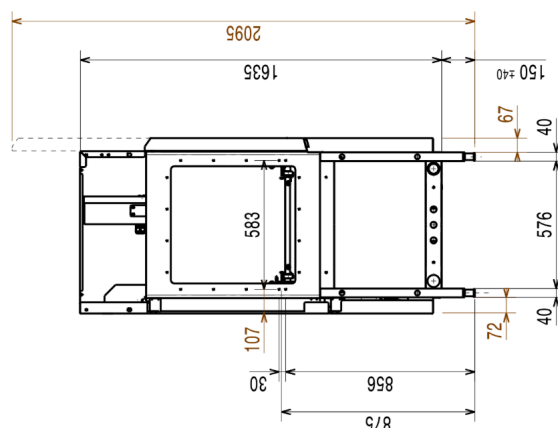

Side

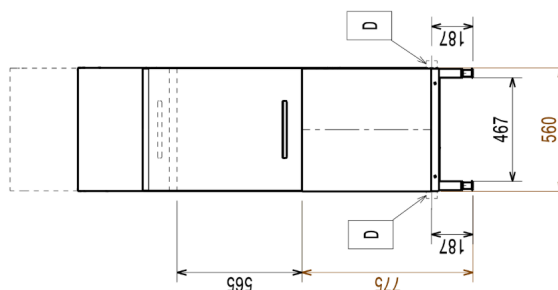

Top



- D = Drain
- EI = Electrical inlet (power)
- HWI = Hot water inlet
- EQ = Equipotential screw
- EO = Electrical Outlet
- CWI = Cold Water Inlet
- U = USB port
- ES = Electrical signal IN/OUT

