

**535178 (NMDDREL5)**

Medium drying zone with door for dual rinse rack type dishwasher, Left>Right, 50/60Hz

Main Features

- Electronically controlled to optimize drying results.
- Drying zone removes most of water from the crockery through a high powered fan that extracts dry air from outside mixing it with the internal air, thus providing dry plates at a temperature cool enough to handle safely.
- IP25 protection against water jets, solid objects and small animals (larger than 6 mm).
- The feeding direction can be either left to right or right to left as it's reversible on site.
- Large counter balanced inspection door allows unrestricted all-round access to the internal area. Door is insulated with injected foam. This adds strength as well as reduces noise and heat loss.
- Unit to be placed between dual rinse rack type dishwasher and handling system.

Construction

- The chamber is pressed with fully rounded corners without internal pipes and therefore no hidden dirt traps.
- All main components made in heavy duty anti-corrosive 304 type stainless steel: internal chamber, external, front and side panels, door and rack transportation system.
- The unit is built on modularity concept to easily connect with dual rinse rack type dishwasher without any modification including power, inlet water, drain water, detergent and rinse aid connections.

Optional Accessories

PNC Code	Description
Handling system	
863228	Plain undershelf with hole for drain for Hot Air Blower, 560 mm
863229	Grid undershelf for Hot Air Blower, 555 mm
865477	Pair of legs for long conveyors connected directly to the Rack Type Dishwasher with hot air blower

Technical specifications

Electric

Supply voltage:	380-415 V/3N ph/50 Hz
Default Installed Power:	4.4 kW


Key Information:

External dimensions, Width:	560 mm
External dimensions, Depth:	825 mm
External dimensions, Height:	1172 mm
Net weight:	57 kg
Shipping weight (gross):	69 kg
Shipping height:	1310 mm
Shipping width:	910 mm
Shipping depth:	610 mm
Shipping volume:	0.73 m³


Sustainability

Noise level:	<62 dBA
--------------	---------


Front

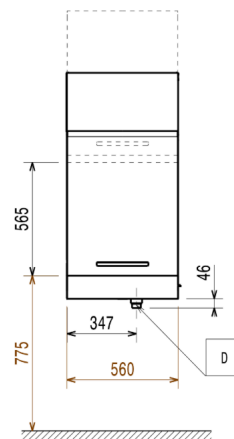

Side

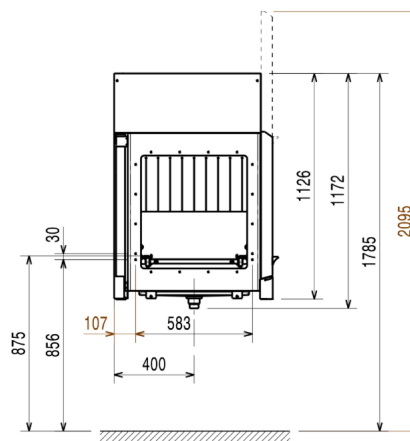

Top



D = Drain
 EI = Electrical inlet (power)
 EQ = Equipotential screw
 EO = Electrical Outlet
 CWI = Cold Water Inlet
 U = USB port
 ES = Electrical signal IN/OUT

