

**506053 (ZPPWSSG)**

Electric pot & pan washer with electronic control, drain pump, detergent dispenser and rinse aid dispenser, steam

Main Features

- Fault auto-diagnosis system.
- High efficiency air gap (class A) in water inlet circuit to avoid water being siphoned back into the network as a result of a sudden drop in main pressures.
- Low noise level.
- Easier access to the washing chamber thanks to the 180° frontal opening door.
- Self-cleaning cycle.
- Requires limited space for opening thanks to the door divided in 2 sections.
- Available upon request, pre-arranged model for HACCP implementation (both basic as well as integrated system).
- Simple electronic control panel.
- 4 washing programs (one program is continual).
- Open air gap in compliance with WRC regulations.
- Atmospheric insulated boiler combined with the rinse booster pump for perfect rinsing results (water temperature and pressure always constant during rinsing cycles), independent from the inlet water pressure.
- Simple service from the front.
- Equipped with drain pump and built-in detergent dispenser for easy and quick installation without opening the machine.

Construction

- External connecting board protected by a waterproof plastic box.
- Easy to remove pump and tank filters.
- Large strainer box above the water surface for frequent cleaning operations.
- Equipped with side washing arms in addition to upper and lower wash arms.
- 304 AISI stainless steel front and side panels, wash tank, tank filter and wash and rinse arms.
- Unit to feature smooth surfaces to facilitate cleaning.
- 304 stainless steel boiler with higher welding protection to increase resistance to corrosion.
- Unit to feature rinse aid dispenser pump.

Sustainability

- Double skin insulated door to reduce heat dispersion.
- Pre-arranged to be connected to Energy Management device.

Included Accessories

PNC Code	Description	Quantity
864182	Extra rack for containers and trays	1
864191	Extra stainless steel basket, 688 mm	1

Optional Accessories

PNC Code	Description
----------	-------------

Baskets

864182	Extra rack for containers and trays
864191	Extra stainless steel basket, 688 mm
864471	Kit for trays in Potwashers

Water treatment

864017	Filter for partial demineralization
864050	Kit to measure total/partial water hardness
864367	Filter for total demineralization

Other accessories

864015	Filter for total demineralization
--------	-----------------------------------

Technical specifications

Electric

Supply voltage:	400 V/3N ph/50 Hz
Default Installed Power:	9.5 kW
Wash pump power:	2.5 kW

Water:

Washing cycle electrical elements:	7 kW
Hot rinse cycle duration (sec.):	20
Water supply temperature*:	50 °C
Washing tank capacity (lt):	95
Boiler Capacity (lt):	18
Pressure, bar min/max:	1-3 bar


Key Information:

Washing cycle temperature:	55-65 °C
Hot rinse cycle temperature:	84 °C
N° of working cycles:	4 (180/360/540/inf)
External dimensions, Width:	876 mm
External dimensions, Depth:	900 mm
External dimensions, Height:	1791 mm
Net weight:	200 kg
Shipping weight (gross):	230 kg
Shipping height:	2030 mm
Shipping width:	1040 mm
Shipping depth:	1040 mm
Shipping volume:	2.2 m³


Sustainability

Rinsing water consumption (per cycle):	7 lt
--	------


Front

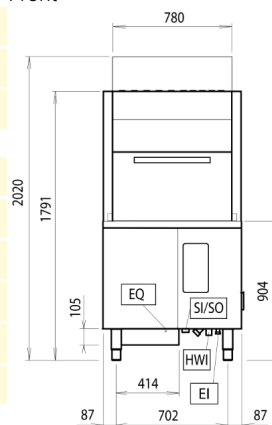

Side

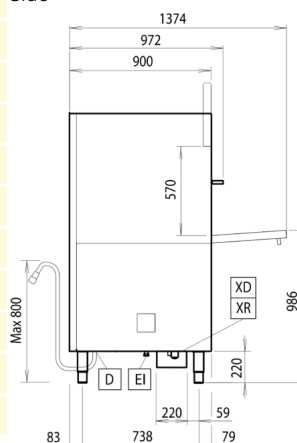

Top



D = Drain
EI = Electrical inlet (power)
HWI = Hot water inlet
XD = Detergent connection
EO = Electrical Outlet

