

**R290** **730292 (IGF225M230SNP)**

Ice maker, granular ice, 234 kg/24h, modular, 230kg stainless steel collection bin, water-cooled

Main Features

- Compliant to CE requirements for safety.
- Food grade ABS interior.
- Fully automatic in operation.
- Suitable for gravity drain only.
- Water consumption and productivity calculated using 15°C water temperature and 21°C ambient temperature.
- Bin included.
- The ice-making method (crushing system) guarantees compact, hygienically pure crushed ice that is resistant to melting.
- The ice making method guarantees a continuous and reliable production.
- Easy cleanability guaranteed by an automatic system: the cleaning switch activate the circulation and the rinse of water; at the end of the cycle just swithed again to start producing ice.
- Rounded internal corners of the bin assure ease of cleaning.

Construction

- Easy access to the main components for maintenance.
- Plug as standard (schuko type).
- AISI 304 stainless steel exterior.
- Internal ice containers in ABS.
- Reliability guaranteed by the quality of the construction materials used (front, top and sides in 304 AISI stainless steel) and the sophisticated product and process technology involved.
- AISI 316 evaporator ensures a safe contact with ice.
- Supplied with flexible water supply, drain hoses and scoop.

Sustainability

- Reduced energy consumption by fully insulated storage bin.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.

Optional Accessories

PNC Code	Description
Other accessories	
0S1628	PURITY C150 QUELL KIT WITH OF FLOW METER
0S1629	PURITY C300 QUELL KIT WITH OF FLOW METER

Recommended Detergents

PNC Code	Description
0S2881	S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T
0S2883	S03 ALCOHOL BASE DETERGENT; 6 BOTTLES X 750ML; ADR&IMDG&IATA Limited Quantity
0S2884	S04 GLASSES & HARD SURFACES CLEANERS; 6 BOTTLES X 750ML
0S3257	S05 - MULTIPURPOSE DEGREASER; 6PCS X 750ML; ADR&IMDG Limited Quantity

Technical specifications

Electric

Front

Supply voltage:	220-240 V/1N ph/50 Hz
-----------------	-----------------------

Water:

Water outlet size:	25mm
--------------------	------

Capacity:

Bin capacity:	230 kg
---------------	--------

Key Information:

External dimensions, Width:	762 mm
-----------------------------	--------

External dimensions, Depth:	819 mm
-----------------------------	--------

External dimensions, Height:	1751 mm
------------------------------	---------

Net weight:	52 kg
-------------	-------

Output:	234 kg/day
---------	------------



Sustainability

Refrigerant type:	R290
-------------------	------


Refrigerant weight:	95 g
---------------------	------

Water consumption:	54.9 lt/hr
--------------------	------------

Side

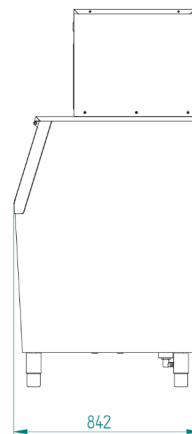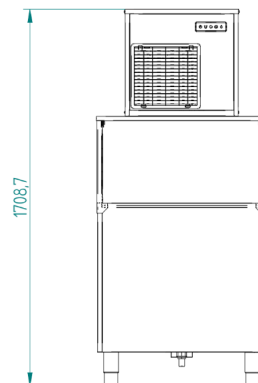

Other



CWI1 = Cold Water inlet 1 (cleaning)

D = Drain

EI = Electrical inlet (power)