

**R290** **730294 (IGF618M340SNP)**

Ice maker, granular ice, 618 kg/24h, modular, 340kg stainless steel collection bin, water-cooled

Main Features

- Compliant to CE requirements for safety.
- Food grade ABS interior.
- Fully automatic in operation.
- Suitable for gravity drain only.
- Water consumption and productivity calculated using 15°C water temperature and 21°C ambient temperature.
- Bin included.
- The ice-making method (crushing system) guarantees compact, hygienically pure crushed ice that is resistant to melting.
- The ice making method guarantees a continuous and reliable production.
- Easy cleanability guaranteed by an automatic system: the cleaning switch activate the circulation and the rinse of water; at the end of the cycle just swithed again to start producing ice.
- Rounded internal corners of the bin assure ease of cleaning.

Construction

- Easy access to the main components for maintenance.
- Plug as standard (schuko type).
- AISI 304 stainless steel exterior.
- Internal ice containers in ABS.
- Reliability guaranteed by the quality of the construction materials used (front, top and sides in 304 AISI stainless steel) and the sophisticated product and process technology involved.
- AISI 316 evaporator ensures a safe contact with ice.
- Supplied with flexible water supply, drain hoses and scoop.

Sustainability

- Reduced energy consumption by fully insulated storage bin.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.


Recommended Detergents

PNC Code	Description
0S2881	S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T
0S2883	S03 ALCOHOL BASE DETERGENT; 6 BOTTLES X 750ML; ADR&IMDG&IATA Limited Quantity
0S2884	S04 GLASSES & HARD SURFACES CLEANERS; 6 BOTTLES X 750ML
0S3257	S05 - MULTIPURPOSE DEGREASER; 6PCS X 750ML; ADR&IMDG Limited Quantity


Technical specifications

Electric	
Supply voltage:	200-240 V/1N ph/50 Hz
Electrical power max.:	0.14 kW
Water:	
Water outlet size:	25mm
Capacity:	
Bin capacity:	340 kg
Key Information:	
External dimensions, Width:	762 mm
External dimensions, Depth:	819 mm
External dimensions, Height:	1972 mm
Net weight:	52 kg
Output:	618 kg/day
Sustainability	
Refrigerant type:	R290
Refrigerant weight:	110 g
Water consumption:	127.7 lt/hr


Front

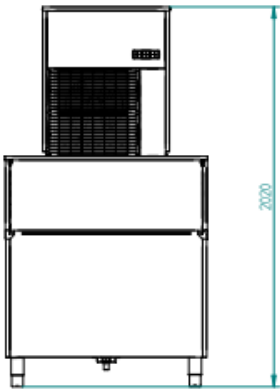

Side

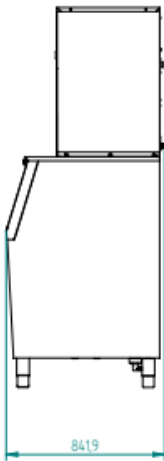

Other



- CWI1 = Cold Water inlet 1 (cleaning)
- D = Drain
- EI = Electrical inlet (power)
- WOC = Cooling water outlet
- WIC = Cooling water inlet