

**110850 (NP142GRC)**

2-glass door refrigerator 1430lt, +2/+10°C (R290), digital, AISI 304

**Main Features**

- Digital temperature display and setting +2/+10 °C.
- Large storage area suitable to contain 2/1 GN grids or shelves on anti-tilt runners.
- Performance guaranteed at ambient temperatures of +32°C.
- The operating temperature can be adjusted from +2 to +10°C to suit both meat and dairy storage requirements.
- Cabinet fitted with up to 75 mm thickness of cyclopentane insulation for best insulating performance with 100% environmental protection (thermal conductivity: 0,020 W/m\*K).
- Optiflow: back to front forced air flow and removable air conveyors provide even temperature distribution and fast cooling in any conditions.
- 60 mm-thick insulation covering the evaporator can be easily removed with a single operation.
- Prearranged to fit RS485 port to facilitate connection to a remote computer and integrated HACCP systems.
- Led lights on the door guarantee an even light in the cavity.
- Internal structure with 44 charging positions available to host grids, ensuring higher net capacity and a greater storage space.
- Possibility to select 3 different levels of humidity according with the type of food stored inside.
- Tropicalized unit.

**Construction**

- Interior base with rounded corners, pressed from a single sheet.
- Lockable door.
- Constructed from the highest quality AISI 304 Stainless steel.
- Easy access to the main components for maintenance.
- Stainless steel runners and supports easily disassembled.
- The rounded internal corners, the easily removable runners, grids and air conveyors allow for ease of cleaning and high hygiene standards.
- Anti-corrosion bottom material avoids any damage that may be caused to the cabinet by aggressive detergents employed to clean the floors.

## User Interface & Data Management



- Large digital white-digit display with cabinet temperature display and setting, and possibility to select the desired levels of humidity. Bluetooth technology included allows to keep HACCP historical data and download them through the app.
- Zanussi Professional Fridge Control APP makes the life easier for our customers:
  - Monitor safety of preservation process thanks to HACCP data & alarms for precise control
  - Save time and easy data management having the possibility to send the HACCP information in excel format directly to e-mail address
  - Quick operations: set the cabinet temperature/humidity/turbocooling and set date/hour
- Large digital white-digit display with cabinet temperature display and setting, activation of turbo frost cycle (to rapidly cool warm loads) and possibility to activate manually the defrost cycle.
- Large digital white-digit display with cabinet temperature display and setting, manual activation of defrost cycle, turbo frost cycle (to rapidly cool warm loads) and internal light switch.
- Connect the product (with accessory) to the OneConnected Platform via Wi Fi or ethernet connection for a seamless remote experience. Real-time monitoring and analytics, alarm management, HACCP data management, APIs, and advanced features keep your fridge fully under control.



# A focus on sustainability

## Sustainability

- CFC and HCFC-free insulation.
- Automatic evaporation of the defrosting water by hot gas on the top for energy saving.
- R290 refrigerant to reduce green house and ozone depletion effects.
- Cleaning-free condenser: the structure of the wire frame condenser prevents dust and grease accumulation thus avoiding periodical cleaning operations and reducing energy consumption.
- Interior LED light to save energy and for best internal visibility.
- Door switch stops the fan when door is opened to avoid cold air exiting the cell, thus saving energy.
- Removable triple-chamber balloon magnetic gasket to improve insulation and reduce energy consumption and ease of cleaning.
- Improved defrost and evaporator fan management – defrost type changes with temperature set-point: electric below +2°C while air convection defrost above +2°C, thus saving energy.
- Frost Watch Control: fully automatic defrost starts only when ice is actually building-up in the evaporator and adapt the defrosting duration to guarantee perfect ice removal while optimizing energy efficiency consumption.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Cabinet certified as Class A in heavy duty working conditions (40°C-40% humidity) based on European Ecodesign directive.
- The label complies with the delegated regulation (UE) 2015/1094 of the commission of 5th may 2015.

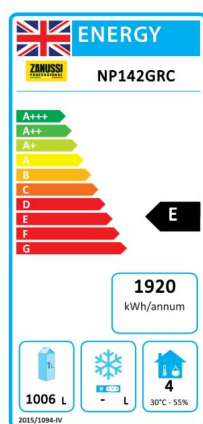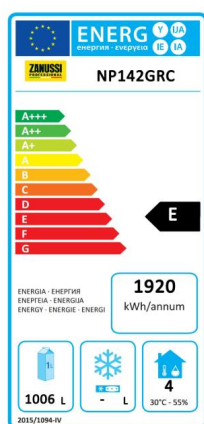

### EU energy labelling from 1st July 2016

*The European energy labelling scheme for professional refrigerators and freezers is based on requirements setting Minimum Energy Performance standards for commercial refrigeration cabinets sold within the EU. These requirements are designed to drive energy efficiency and environmentally friendly approach for professionals. The European energy labelling scheme will apply to all manufacturers and importers who sell and market products within the EU and it is mandatory across Europe. Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016. SI 2020 No. 1528.*

Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.

## Certifications & Recognitions



International system for mutual acceptance of test reports and certificates concerning the safety of electrical and electronic components, equipment, and products.



Product assessed by the manufacturer and deemed to meet EU safety, health, and environmental protection requirements.

# Technical specifications

## Electric

|                 |                      |
|-----------------|----------------------|
| Supply voltage: | 220-240 V/1 ph/50 Hz |
|-----------------|----------------------|

## Key Information:

|                                             |                                       |
|---------------------------------------------|---------------------------------------|
| Number and type of grids (included):        | 8 (GN 2/1)                            |
| Net Volume:                                 | 1006 lt                               |
| Capacity:                                   | 1430 litres lt / Bottle .75L Bordeaux |
| External dimensions, Width:                 | 1441 mm                               |
| External dimensions, Depth:                 | 835 mm                                |
| External dimensions, Depth with Doors Open: | 1480 mm                               |
| External dimensions, Height:                | 2050 mm                               |
| Number and type of doors:                   | 2 Glass                               |
| Type of external material:                  | Stainless Steel AISI 304              |
| Type of internal material:                  | Stainless Steel AISI 304              |
| Internal panels material:                   | Stainless Steel AISI 304              |
| Number of positions & pitch:                | 44; 30 mm                             |
| Gross capacity:                             | 1430 liter                            |
| Type of model:                              | Vertical chilled                      |





## Refrigeration Data

|                                                 |            |
|-------------------------------------------------|------------|
| Control type:                                   | Digital    |
| Refrigeration power at evaporation temperature: | -10 °C     |
| Operating temperature min.:                     | 2 °C       |
| Operating temperature max.:                     | 10 °C      |
| Operating mode:                                 | Ventilated |

## Sustainability

|                                                  |                    |
|--------------------------------------------------|--------------------|
| Refrigerant type:                                | R290               |
| Refrigeration power:                             | 395 W              |
| Energy Class (EU Reg. 2015/1094):                | E                  |
| Climate class (EU Reg. 2015/1094):               | Normal duty (cl.4) |
| Energy Efficiency Index-EEI (EU Reg. 2015/1094): | 84,88              |

# Installation drawings

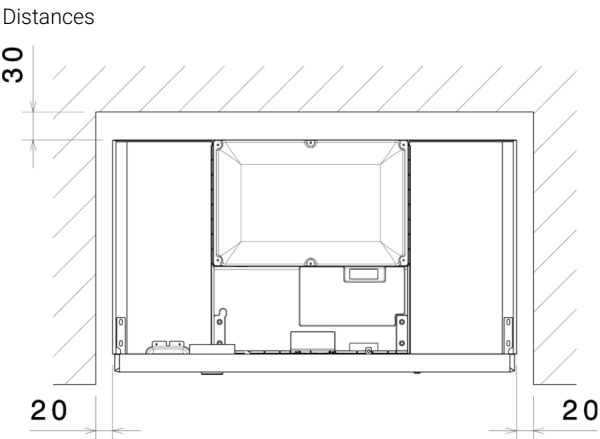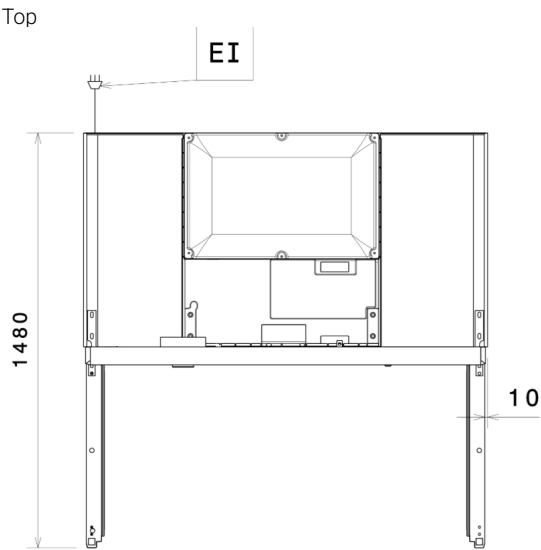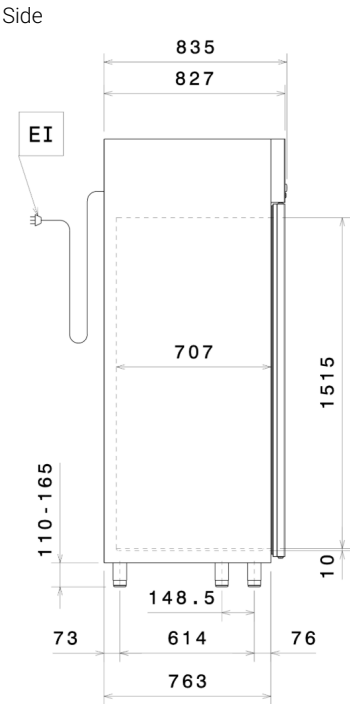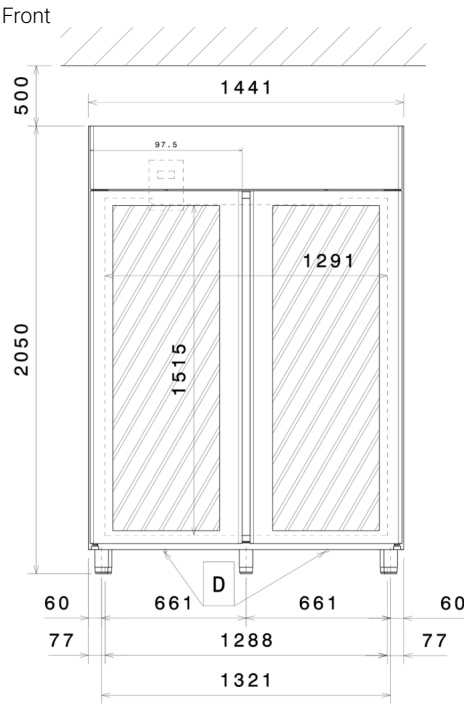

EI = Electrical inlet (power)  
RI = Refrigerant Inlet

RO = Refrigerant Outlet

# Accessories

## Included Accessories

| PNC Code | Description                           | Quantity |
|----------|---------------------------------------|----------|
| 881020   | 2/1GN grey rilsan grid with 2 runners | 8        |

## Optional Accessories

| PNC Code | Description |
|----------|-------------|
|----------|-------------|

### Baskets

|        |                                        |
|--------|----------------------------------------|
| 881043 | 1/1GN rilsan steel wire basket h=150mm |
|--------|----------------------------------------|

### Containers, trays and grids

|        |                                                                            |
|--------|----------------------------------------------------------------------------|
| 880242 | 2 stainless steel runners for refrigerated cabinets (Marine)               |
| 880243 | Set of 8 GN1/1 PVC containers for fish                                     |
| 880248 | Spacer for 670 lt and 1430 lt refrigerated cabinets                        |
| 880333 | Kit to fit 20 pastry trays (400x600mm)                                     |
| 880705 | 1/1GN plastic container with false bottom                                  |
| 881004 | 2/1GN grey rilsan grid                                                     |
| 881016 | 2/1GN aisi 304 stainless steel grid                                        |
| 881018 | 2/1GN 304 AISI stainless steel grid with 2 runners                         |
| 881019 | Meat rail for 670/1430lt refrigerators with 4 hooks                        |
| 881020 | 2/1GN grey rilsan grid with 2 runners                                      |
| 881021 | Set of 2 stainless steel runners for 670/1430lt refrigerators and freezers |
| 881039 | 2/1GN pvc container with lid and 2 runners                                 |
| 881042 | 2/1GN perforated shelf                                                     |
| 881047 | 2/1GN grey rilsan basket+2 runners h=150mm                                 |

### Doors and drawers

|        |                                                   |
|--------|---------------------------------------------------|
| 881163 | Glass door protection kit for Glass Door Cabinets |
|--------|---------------------------------------------------|

### Feet, wheels and ramps

|        |                                                                                                  |
|--------|--------------------------------------------------------------------------------------------------|
| 881033 | Pedal opening for 1430lt refrigerator                                                            |
| 881294 | 5 swivelling wheels (2 with brake), diam 125mm, for 1430 lt refrigerators, NOT for remote models |

### Other accessories

|        |                                                   |
|--------|---------------------------------------------------|
| 881298 | IoT module for refrigerated cabinets and counters |
|--------|---------------------------------------------------|

## Recommended Detergents

| PNC Code | Description                                                                   |
|----------|-------------------------------------------------------------------------------|
| OS2881   | S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T                   |
| OS2883   | S03 ALCOHOL BASE DETERGENT; 6 BOTTLES X 750ML; ADR&IMDG&IATA Limited Quantity |
| OS2884   | S04 GLASSES & HARD SURFACES CLEANERS; 6 BOTTLES X 750ML                       |
| OS3257   | S05 - MULTIPURPOSE DEGREASER; 6PCS X 750ML; ADR&IMDG Limited Quantity         |

