

**110882 (ZRI075R1FR)**

1-door Roll-in Refrigerator 750lt, 0+10°C, AISI 304, remote

Main Features

- Adjustable bottom door gasket.
- Automatic defrost and automatic evaporation of defrost water.
- Digital control panel with temperature display.
- Excellent space optimisation thanks to the compact dimensions (footprint 0.56m²).
- Lift-up control panel to better access main components.
- Simple cooling unit easily accessible from the rear of the appliance.
- Suitable for all kinds of 18 shelves GN 1/1 trolleys, designed to fit the 18 shelves GN 2/1 trolley available as optional accessory.
- The operating temperature can be adjusted from 0 to +10 °C to suit both meat and dairy storage requirements.
- Ventilated cooling for optimal temperature distribution.
- Complies with main international certification bodies and is CE marked.
- One full door.
- Inner side protectors to protect the internal walls.
- Tropicalized unit.

Construction

- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Evaporator and fan are placed outside the cell to provide the maximum storage capacity.
- Evaporator cover is easily removable for service.
- External panels are in AISI 304 stainless steel for higher level of hygiene.
- Interior cell and external panel are constructed in 304 AISI stainless steel.
- Lockable door.
- Electrical connection: 220-240V-single phase 50HZ or 220-240V-single phase 60HZ.
- Remote compressor to suit operating conditions.

User Interface & Data Management

- Large digital white-digit display with humidity selection button (3 preset level), internal temperature display and setting, manual activation of defrost cycle and turbo frost cycle (to rapidly cool warm loads).
- Connect the product (with accessory) to the OneConnected Platform via Wi Fi or ethernet connection for a seamless remote experience. Real-time monitoring and analytics, alarm management, HACCP data management, APIs, and advanced features keep your fridge fully under control.

Sustainability

- Cabinet fitted with up to 60 mm thickness of Cyclopentane insulation for best insulating performance (thermal conductivity: 0,020 W/m*K). CFC and HCFC-free insulation.
- CFC and HCFC-free insulation.
- Finished in top quality materials to ensure durability.

Optional Accessories

PNC Code	Description
Feet, wheels and ramps	
881278	Insulated floor-ramp for 750lt Roll-in Refrigerator
Remote units	
880231	Remote unit for refrigerators and refrigerated counters, -2+10°C, R134a
Trolleys	
881521	Trolley 18 GN 2/1 for 750lt Roll-in
Other accessories	
881299	Ethernet connector for IR33 (CAREL) refrigerated cabinets and counters

Recommended Detergents

PNC Code	Description
0S2881	S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T
0S2883	S03 ALCOHOL BASE DETERGENT; 6 BOTTLES X 750ML; ADR&IMDG&IATA Limited Quantity
0S2884	S04 GLASSES & HARD SURFACES CLEANERS; 6 BOTTLES X 750ML
0S3257	S05 - MULTIPURPOSE DEGREASER; 6PCS X 750ML; ADR&IMDG Limited Quantity

Technical specifications

Electric

Supply voltage: 220-240 V/1 ph/50/60 Hz

Key Information:

External dimensions, Width: 750 mm

External dimensions, Depth: 816 mm

External dimensions, Height: 2101 mm

Number and type of doors: 1 Full

External side panels: Stainless Steel AISI 304

External top panels: Galvanized Steel

External door material: Stainless Steel AISI 304

Internal panels material: Stainless Steel AISI 304

Refrigeration Data

Control type: Digital

Operating temperature max.: 10 °C

Refrigeration type: R134a;R513A;R426A

Suggested refrigeration power: 580 W

Condition at evaporation temperature: -10 °C


Condition at condensation temperature: 55 °C

Condition at ambient temperature: 43 °C


Connection pipes (remote) - outlet: 9.8 mm

Connection pipes (remote) - inlet: 6 mm


Front

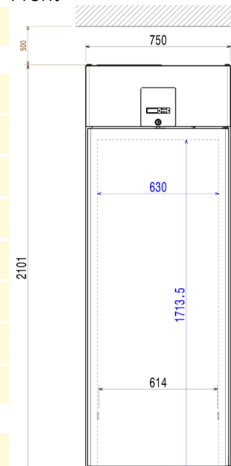

Side

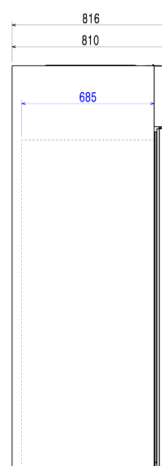

Top



EI = Electrical inlet (power)

RO = Refrigerant Outlet

RI = Refrigerant Inlet

