

**110883 (ZRI075R2FGT)**

1-full and 1-glass door Roll-through Refrigerator, 750lt, +2+10°C, AISI 304, R290

**Main Features**

- Adjustable bottom door gasket.
- Automatic defrost and automatic evaporation of defrost water.
- Digital control panel with temperature display.
- Interior light and lockable door.
- Lift-up control panel to better access main components.
- Simple cooling unit easily accessible from the rear of the appliance.
- Suitable for all kinds of 18 shelves GN 1/1 trolleys, designed to fit the 18 shelves GN 2/1 trolley available as optional accessory.
- The operating temperature can be adjusted from +2 to +10°C to suit both meat and dairy storage requirements.
- Ventilated cooling for optimal temperature distribution.
- Complies with main international certification bodies and is CE marked.
- Right hinged glass door.
- Inner side protectors to protect the internal walls.
- One full door and one glass door.
- Tropicalized unit.

**Construction**

- Built-in compressor to suit operating conditions.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Evaporator and fan are placed outside the cell to provide the maximum storage capacity.
- Evaporator cover is easily removable for service.
- External panels are in AISI 304 stainless steel for higher level of hygiene.
- Interior cell and external panel are constructed in 304 AISI stainless steel.
- Lockable door.
- Electrical connection: 220-240V-single phase 50HZ or 220-240V-single phase 60HZ.

**User Interface & Data Management**

- Large digital white-digit display with humidity selection button (3 preset level), internal temperature display and setting, manual activation of defrost cycle and turbo frost cycle (to rapidly cool warm loads).
- Connect the product (with accessory) to the OneConnected Platform via Wi Fi or ethernet connection for a seamless remote experience. Real-time monitoring and analytics, alarm management, HACCP data management, APIs, and advanced features keep your fridge fully under control.

## Sustainability

- Cabinet fitted with up to 60 mm thickness of Cyclopentane insulation for best insulating performance (thermal conductivity: 0,020 W/m\*K). CFC and HCFC-free insulation.
- CFC and HCFC-free insulation.
- Finished in top quality materials to ensure durability.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.

## Optional Accessories

| PNC Code                      | Description                                                            |
|-------------------------------|------------------------------------------------------------------------|
| <b>Feet, wheels and ramps</b> |                                                                        |
| 881279                        | Insulated floor-ramp for 750lt Roll-in Pass-through Refrigerator       |
| <b>Trolleys</b>               |                                                                        |
| 881521                        | Trolley 18 GN 2/1 for 750lt Roll-in                                    |
| <b>Other accessories</b>      |                                                                        |
| 881299                        | Ethernet connector for IR33 (CAREL) refrigerated cabinets and counters |

## Recommended Detergents

| PNC Code | Description                                                                   |
|----------|-------------------------------------------------------------------------------|
| 0S2881   | S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T                   |
| 0S2883   | S03 ALCOHOL BASE DETERGENT; 6 BOTTLES X 750ML; ADR&IMDG&IATA Limited Quantity |
| 0S2884   | S04 GLASSES & HARD SURFACES CLEANERS; 6 BOTTLES X 750ML                       |
| 0S3257   | S05 - MULTIPURPOSE DEGREASER; 6PCS X 750ML; ADR&IMDG Limited Quantity         |

# Technical specifications

## Electric

|                   |                      |
|-------------------|----------------------|
| Supply voltage:   | 220-240 V/1 ph/50 Hz |
| Predisposed for:  | 220-230 V 60 Hz      |
| Compressor power: | 1/3 hp               |

## Key Information:

|                              |                          |
|------------------------------|--------------------------|
| External dimensions, Width:  | 750 mm                   |
| External dimensions, Depth:  | 832 mm                   |
| External dimensions, Height: | 2101 mm                  |
| Number and type of doors:    | 2 Full;Glass             |
| External side panels:        | Stainless Steel AISI 304 |
| External top panels:         | Stainless Steel AISI 304 |
| External door material:      | Glass                    |
| Internal panels material:    | Stainless Steel AISI 304 |


## Refrigeration Data

|                             |       |
|-----------------------------|-------|
| Operating temperature min.: | 2 °C  |
| Operating temperature max.: | 10 °C |


## Sustainability

|                      |       |
|----------------------|-------|
| Refrigerant type:    | R290  |
| Refrigeration power: | 520 W |
| Refrigerant weight:  | 145 g |


Front

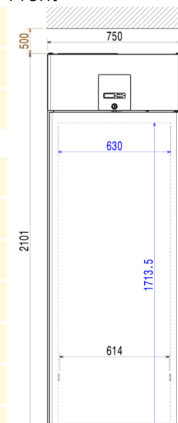

Side

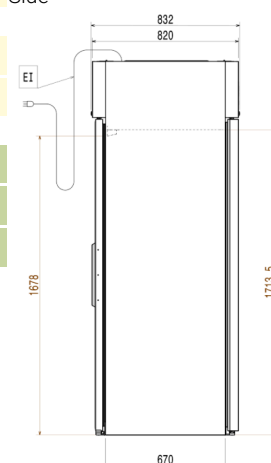

Top

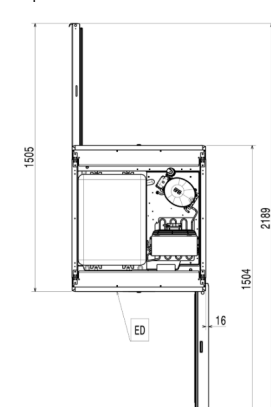

EI = Electrical inlet (power)

RO = Refrigerant Outlet

RI = Refrigerant Inlet

