

110884 (ZRI16R1FR)

1-door Roll-in Refrigerator 1600lt, 0+10°C, AISI 304, R290

Main Features

- Adjustable bottom door gasket.
- Automatic defrost and automatic evaporation of defrost water.
- Digital control panel with temperature display.
- Lift-up control panel to better access main components.
- Simple cooling unit easily accessible from the rear of the appliance.
- The operating temperature can be adjusted from 0 to +10 °C to suit both meat and dairy storage requirements.
- Universal shock-protectors on all sides.
- Ventilated cooling for optimal temperature distribution.
- Complies with main international certification bodies and is CE marked.
- Plug-in installation: 1 phase, 220/240V supply.
- One full door.
- Tropicalized unit.

Construction

- Built-in compressor to suit operating conditions.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Evaporator and fan are placed outside the cell to provide the maximum storage capacity.
- Evaporator cover is easily removable for service.
- External panels are in AISI 304 stainless steel for higher level of hygiene.
- Interior cell and external panel are constructed in 304 AISI stainless steel.
- Lockable door.
- The whole interior cell is constructed of AISI 304 stainless steel with rounded corners for a better cleanability.

User Interface & Data Management

- Large digital white-digit display with humidity selection button (3 preset level), internal temperature display and setting, manual activation of defrost cycle and turbo frost cycle (to rapidly cool warm loads).
- Connect the product (with accessory) to the OneConnected Platform via Wi Fi or ethernet connection for a seamless remote experience. Real-time monitoring and analytics, alarm management, HACCP data management, APIs, and advanced features keep your fridge fully under control.

Sustainability

- 75 mm thick insulation, with cyclopentane injection for long-term insulation and energy saving.
- CFC and HCFC-free insulation.
- Finished in top quality materials to ensure durability.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.

Optional Accessories

PNC Code	Description
Handling - bakery	
922761	Bakery/pastry trolley with rack holding 600x400mm grids for 20 GN 1/1 oven and blast chiller freezer, 80mm pitch (16 runners)
922762	Bakery/pastry trolley with rack holding 400x600mm grids for 20 GN 2/1 oven and blast chiller freezer, 80mm pitch (16 runners)
Handling - banqueting	
922756	Banquet trolley with rack holding 54 plates for 20 GN 1/1 oven and blast chiller freezer, 74mm pitch
922760	Banquet trolley with rack holding 92 plates for 20 GN 2/1 oven and blast chiller freezer, 85mm pitch
922763	Banquet trolley with rack holding 45 plates for 20 GN 1/1 oven and blast chiller freezer, 90mm pitch
922764	Banquet trolley with rack holding 116 plates for 20 GN 2/1 oven and blast chiller freezer, 66mm pitch
Handling - gastronorm	
922683	Trolley with tray rack, 15 GN 1/1, 84mm pitch
922686	Trolley with tray rack, 15 GN 2/1, 84mm pitch
922753	Trolley with tray rack, 20 GN 1/1, 63mm pitch
922754	Trolley with tray rack, 16 GN 1/1, 80mm pitch
922757	Trolley with tray rack 20 GN 2/1, 63mm pitch
922758	Trolley with tray rack, 16 GN 2/1, 80mm pitch

Recommended Detergents

PNC Code	Description
0S2881	S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T
0S2883	S03 ALCOHOL BASE DETERGENT; 6 BOTTLES X 750ML; ADR&IMDG&IATA Limited Quantity
0S2884	S04 GLASSES & HARD SURFACES CLEANERS; 6 BOTTLES X 750ML
0S3257	S05 - MULTIPURPOSE DEGREASER; 6PCS X 750ML; ADR&IMDG Limited Quantity

Technical specifications

Electric

Supply voltage:	220-240 V/1 ph/50 Hz
Predisposed for:	
Compressor power:	1/3 hp

Key Information:

External dimensions, Width:	1021 mm
External dimensions, Depth:	1175 mm
External dimensions, Height:	2273 mm
Number and type of doors:	1 Full
External side panels:	Stainless Steel AISI 304
External top panels:	Stainless Steel AISI 304
External door material:	Stainless Steel AISI 304
Internal panels material:	Stainless Steel AISI 304


Refrigeration Data

Operating temperature min.:	0 °C
Operating temperature max.:	10 °C


Sustainability

Refrigerant type:	R290
Refrigeration power:	678 W
Refrigerant weight:	150 g


Front

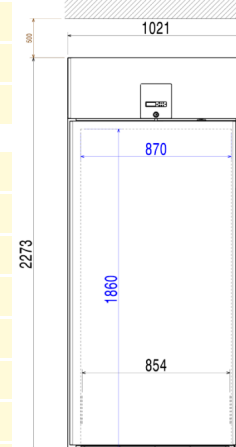

Side

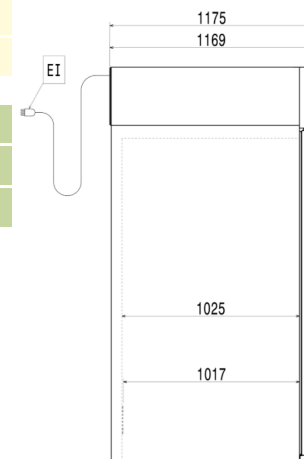

Top

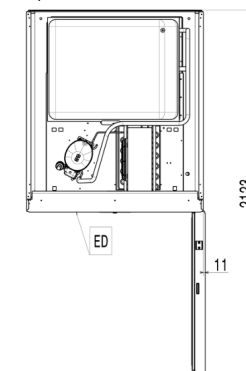

EI = Electrical inlet (power)

RO = Refrigerant Outlet

RI = Refrigerant Inlet

