

**372027 (Z7HOED2000)**

Electric hob cooking top, half module

Main Features

- All major compartments located in front of unit for ease of maintenance.
- Pans can easily be moved from one area to another without lifting.
- Various sizes of pans can be used at the same time due to large surface area with no intermediate sectors.
- 5.3 kW infrared heating elements can reach a maximum temperature of 400°C.
- Durable mild steel cooking plate, easy to clean.
- Top configuration allows installation on ambient base only (not possible to install on refrigerated nor freezer base).
- Suitable for countertop installation.

Construction

- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- One piece pressed 1.5 mm work top in Stainless steel.
- IPx4 water protection.
- All exterior panels in Stainless Steel with Scotch Brite finishing.

Optional Accessories

PNC Code	Description
Bridge supports	
206137	Support for bridge type installation, 800 mm
206138	Support for bridge type installation, 1000 mm
206139	Support for bridge type installation, 1200 mm
206141	Support for bridge type installation, 1600 mm
206154	Support for bridge type installation, 400 mm
Chimney upstands	
206303	Chimney upstand, 400 mm
206400	Chimney grid net, 400mm

PNC Code	Description
Handrails	
206166	Frontal handrail 400 mm
206167	Frontal handrail 800 mm
206185	Large handrail (portioning shelf) 400 mm
206186	Large handrail (portioning shelf) 800 mm
206191	Frontal handrail 1200 mm
206192	Frontal handrail 1600 mm
206240	Right and left side handrails
Installation solutions	
206086	Junction sealing kit
Panels	
206320	2 side covering panels, height 250 mm, depth 700 mm
Water taps	
206289	Water column with swivel arm (water column extension not included)
206291	Water column extension

Technical specifications


Electric

Supply voltage:	380-400 V/3N ph/50/60 Hz
Total Watts:	5 kW
Predisposed for:	380-400V 3N~ 50/60Hz 4.5-5kW


Key Information:

External dimensions, Width:	400 mm
External dimensions, Depth:	700 mm
External dimensions, Height:	250 mm
Net weight:	47 kg
Shipping weight (gross):	42 kg
Shipping height:	530 mm
Shipping width:	460 mm
Shipping depth:	820 mm
Shipping volume:	0.2 m³
Certification group:	N7ETE


Front

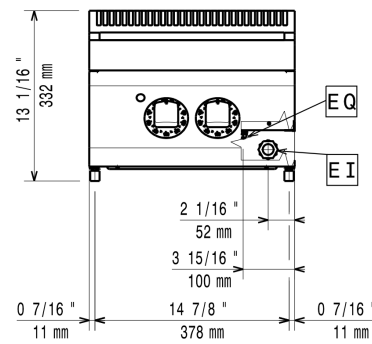

Side

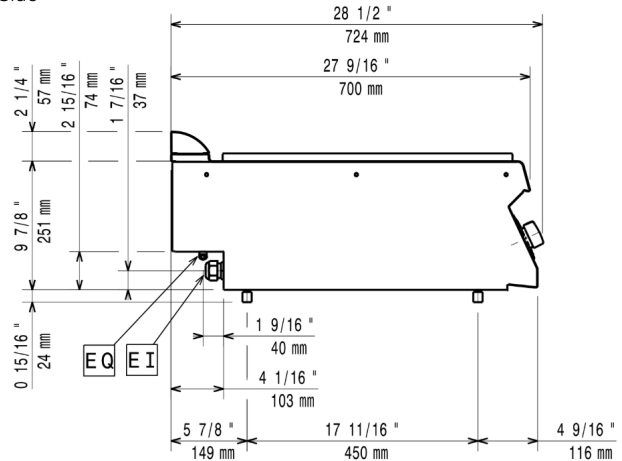

Top

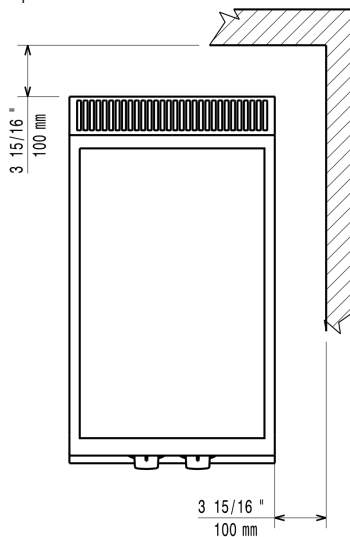

EI = Electrical inlet (power)
EQ = Equipotential screw

