

**372096 (Z7BMEDB000)**

Electric bain-marie top with 1 GN 1/1 well

Main Features

- All major compartments located in front of unit for ease of maintenance.
- Bain Marie used for keeping cooked food at serving temperatures using hot water.
- Basin drained by tap on the front of the machine.
- Filling water level is plate-marked on the side of the well.
- Incoloy armoured heating elements positioned beneath the base of the well.
- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- Unit to feature manual refill of well.
- Water temperature controlled by thermostat with maximum temperature value of 90 °C.
- Suitable for countertop installation.

Construction

- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- One piece pressed 1.5 mm work top in Stainless steel.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- Water basin is seamlessly welded into the top of the appliance.

Optional Accessories

PNC Code	Description
Bottom plates	
921622	Drilled false bottom for bain-marie, 1/2 module
Bridge supports	
206137	Support for bridge type installation, 800 mm
206138	Support for bridge type installation, 1000 mm
206139	Support for bridge type installation, 1200 mm
206140	Support for bridge type installation, 1400 mm
206141	Support for bridge type installation, 1600 mm
206154	Support for bridge type installation, 400 mm
Chimney upstands	
206303	Chimney upstand, 400 mm
Handrails	
206166	Frontal handrail 400 mm
206167	Frontal handrail 800 mm
206185	Large handrail (portioning shelf) 400 mm
206186	Large handrail (portioning shelf) 800 mm
206191	Frontal handrail 1200 mm
206192	Frontal handrail 1600 mm
206240	Right and left side handrails
206308	Back handrail 800 mm
Installation solutions	
206086	Junction sealing kit
Panels	
206320	2 side covering panels, height 250 mm, depth 700 mm
Water taps	
921627	Water filling tap for bain-marie top

Technical specifications


Electric

Supply voltage:	220-230 V/1 ph/50-60 Hz
Total Watts:	1.5 kW


Key Information:

Usable well dimensions (width):	306 mm
Usable well dimensions (height):	156 mm
Usable well dimensions (depth):	510 mm
Thermostat Range:	30 °C MIN; 90 °C MAX
Net weight:	20 kg
Shipping weight (gross):	22 kg
Shipping height:	520 mm
Shipping width:	460 mm
Shipping depth:	820 mm
Shipping volume:	0.2 m³
Certification group:	EBM74


Front

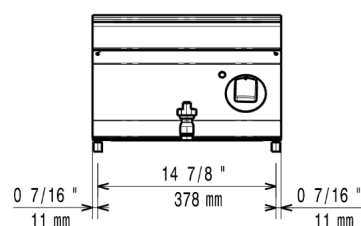

Side

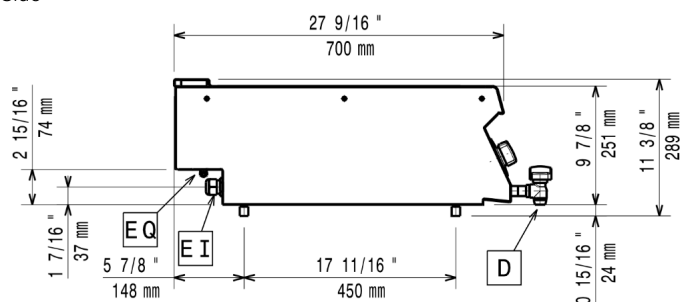

Top

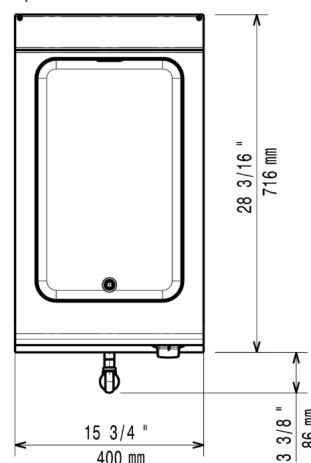

D = Drain

EI = Electrical inlet (power)

EQ = Equipotential screw

DO = Overflow drain pipe

