

**372272 (Z7BSEHINF0)**

60-lt indirect electric boiling pan with pressure switch

372273 (Z7BSEHINFR)

60-lt indirect electric boiling pan with pressure switch with automatic double-jacket refilling

Main Features

- Discharge tube and tap are very easy to clean from outside.
- Ergonomic: the depth of the vessel facilitates stirring the food, also the most delicate food.
- External valve allows to manually evacuate excess air accumulated in the jacket during heating phase.
- Kettle is suitable to cook, sauté or poach all kinds of produce.
- Large capacity food tap enables safe and effortless discharging of contents.
- No overshooting of cooking temperatures, fast reaction.
- Produce is uniformly heated in the base and side walls of the kettle by an indirect heating system that uses integrally generated saturated steam at a temperature of 110° C in the jacket.
- Safety valve avoids overpressure of the steam in the jacket.
- Smooth large surfaces, easy access for cleaning.
- Solenoid valve to refill with hot and cold water.
- Unit to have stainless steel feet with height adjustment up to 50 mm.
- Unit to feature high efficiency heating elements (9.4 kW) with energy control and temperature limiter. (only for 372272)
- Sides of vessel with satin finishing for easy cleaning.
- Minimum load for correct functioning is 20 liters.
- Unit to feature high efficiency heating elements (9.4 kW). (only for 372273)

Construction

- One piece pressed 1.5 mm work top in Stainless steel.
- IPx4 water protection.
- The tanks are welded in two parts, the side band is in AISI 304, bottom is in AISI 316L, lids are in AISI 304.

Sustainability

- Closed heating system – no waste of energy.
- Firmly fitting cover to reduce cooking time and save energy costs.
- Pressure switch control monitors energy and water consumption.

Optional Accessories

PNC Code	Description
Baskets	
921626	1-section noodle basket for 60lt boiling pans
Chimney upstands	
206304	Chimney upstand, 800 mm (only for 372272)
Feet, wheels and ramps	
206135	4 wheels, 2 swivelling with brake (EVO700/900). It is mandatory to install with base supports for feet/wheels.
206136	Flanged feet kit
206210	4 feet for concrete installation (not for 900 line freestanding grill)
206367	Base support for feet or wheels - 800mm (EVO700/900)
206368	Base support for feet or wheels - 1200mm (EVO700/EVO900)
206369	Base support for feet or wheels - 1600mm (EVO700/900)
Handrails	
206167	Frontal handrail 800 mm
206191	Frontal handrail 1200 mm
206192	Frontal handrail 1600 mm
206240	Right and left side handrails
206308	Back handrail 800 mm
Installation solutions	
206086	Junction sealing kit
Kicking strips	
206147	Frontal kicking strip for concrete installation, 400 mm
206148	Frontal kicking strip for concrete installation, 800 mm
206150	Frontal kicking strip for concrete installation, 1000 mm
206151	Frontal kicking strip for concrete installation, 1200 mm
206152	Frontal kicking strip for concrete installation, 1600 mm
206176	Frontal kicking strip, 800 mm
206177	Frontal kicking strip, 1000 mm
206178	Frontal kicking strip, 1200 mm
206179	Frontal kicking strip, 1600 mm
206249	Pair of side kicking strips
206265	Pair of side kicking strips (concrete installation)
Measuring rods	
927000	Measuring rod for 60 l boiling pan

PNC Code	Description
Panels	
206374	Rear paneling - 800mm (EVO700/900)
206375	Rear paneling - 1000mm (EVO700/900)
206376	Rear paneling - 1200mm (EVO700/900)
Trolleys	
922403	Trolley with lifting and removable tank
Other accessories	
206319	2 side covering panels, height 700 mm, depth 700 mm

Recommended Detergents

PNC Code	Description
0S2292	C41 HI-TEMP RAPID DEGREASER 6pcx1L+1 trigger
0S2881	S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T
0S2882	S02 DEGREASER 6pzx750ml - ADR&IMDG Limited Quantity
0S2883	S03 ALCOHOL BASE DETERGENT; 6 BOTTLES X 750ML; ADR&IMDG&IATA Limited Quantity
0S2884	S04 GLASSES & HARD SURFACES CLEANERS; 6 BOTTLES X 750ML
0S3257	S05 - MULTIPURPOSE DEGREASER; 6PCS X 750ML; ADR&IMDG Limited Quantity

Technical specifications

372272

372273

Front

Electric


Supply voltage:	400 V/3N ph/ 50-60 Hz	400 V/3N ph/ 50-60 Hz
Total Watts:	9.4 kW	9.4 kW

Water:


Water drain outlet size:	1"1/2	1"1/2
--------------------------	-------	-------

Key Information:


Pan useful capacity:	60 liter	60 liter
Vessel (round) diameter:	420 mm	420 mm
Net weight:	100 kg	100 kg
Shipping weight (gross):	87 kg	115 kg
Shipping height:	1140 mm	1140 mm
Shipping width:	900 mm	820 mm
Shipping depth:	920 mm	860 mm
Shipping volume:	0.94 m ³	0.8 m ³
Certification group:	EBPI76M	EBPI76A



Side

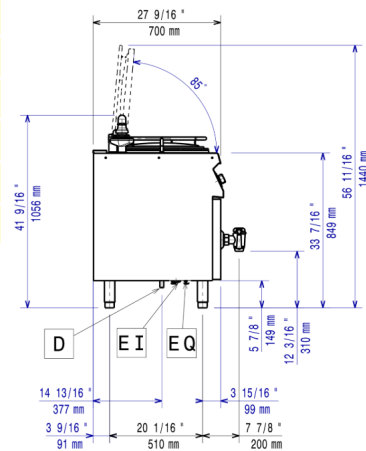

Top

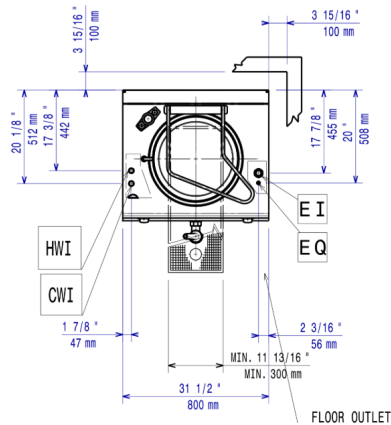

CWI1 = Cold Water inlet 1 (cleaning)

D = Drain

EI = Electrical inlet (power)

HWI = Hot water inlet



Part of



**Electrolux
Professional
Group**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

www.zanussiprofessional.com

2026/07/28

4/4