

**392018 (Z9STGH1000)**

Gas solid top

Main Features

- All major compartments located in front of unit for ease of maintenance.
- Durable cast iron cooking plate, easy to clean.
- Central burner with optimized combustion, flame failure device and protected pilot light.
- Pans can easily be moved from one area to another without lifting.
- Temperature gradients to satisfy different cooking needs, provided over the whole plate thanks to the temperature fine-tuning by zone.
- The center of the plate can reach a maximum temperature of 500 °C while decreasing outwards.
- The special design of the control knob system guarantees against water infiltration.
- Various sizes of pans can be used at the same time due to large surface area with no intermediate sectors.
- Gas heated, 10.5 kW central burner, solid top.
- Piezo ignition.
- Suitable for countertop installation.

Construction

- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- IPX5 water resistance certification.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- Unit is 900mm deep to give a larger working surface area.

Optional Accessories

PNC Code	Description
Bridge supports	
206137	Support for bridge type installation, 800 mm
206138	Support for bridge type installation, 1000 mm
206139	Support for bridge type installation, 1200 mm
206140	Support for bridge type installation, 1400 mm
206141	Support for bridge type installation, 1600 mm
Chimney upstands	
206132	Draught diverter, 150 mm diameter
206133	Matching ring for flue condenser, 150 mm diameter
206246	Flue condenser for 1 module, 150 mm diameter
206304	Chimney upstand, 800 mm
206400	Chimney grid net, 400mm
Gas nozzles	
206386	Kit town gas nozzles (G150) for EVO900 solid top with burners
206459	Kit G.25.3 (NI) gas nozzles for 900 solid tops and solid top combined with burners
Handrails	
206165	Side handrail for right/left hand
206167	Frontal handrail 800 mm
206186	Large handrail (portioning shelf) 800 mm
206191	Frontal handrail 1200 mm
206192	Frontal handrail 1600 mm
216044	SIDE HANDRAIL-RIGHT/LEFT HAND-900 LINE
Installation solutions	
206086	Junction sealing kit
Other accessories	
927225	Pressure regulator for gas units
Other accessories	
206321	2 side covering panels, height 250 mm, depth 900 mm

Technical specifications


Gas

Gas Power:	10.5 kW
Standard gas delivery:	Natural Gas G20 (20mbar)
Gas Type Option:	LPG; Natural Gas; Town Gas
Gas Inlet:	1/2"


Key Information:

Net weight:	92 kg
Shipping weight (gross):	104 kg
Shipping height:	530 mm
Shipping width:	1020 mm
Shipping depth:	860 mm
Shipping volume:	0.46 m³
Certification group:	N9TG
Solid top usable surface (width):	795 mm
Solid top usable surface (depth):	696 mm


Front

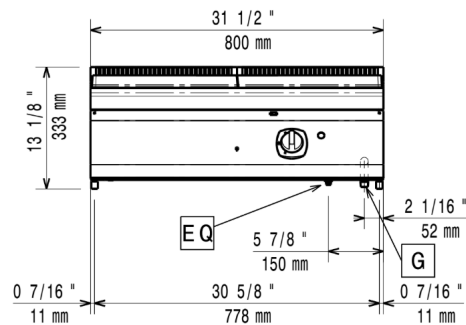

Side

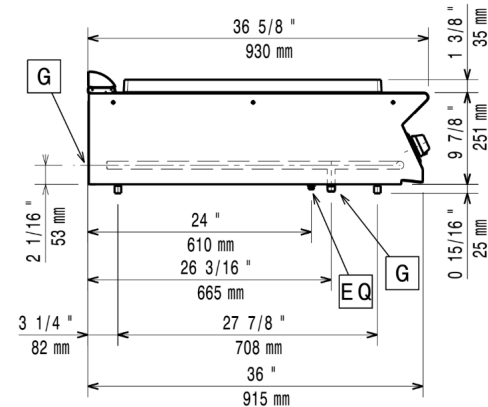

Top

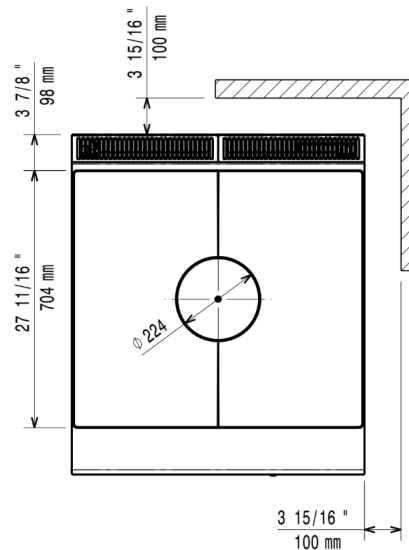

G = Gas connection

EQ = Equipotential screw

