

**392022 (Z9HOGD1000)**

Gas hob with mild steel top, half module

Main Features

- All major compartments located in front of unit for ease of maintenance.
- Pans can easily be moved from one area to another without lifting.
- Setting different temperature zones provides a temperature gradient over the plate for different cooking needs.
- The special design of the control knob system guarantees against water infiltration.
- Various sizes of pans can be used at the same time due to large surface area with no intermediate sectors.
- 2 cooking zones independently controlled.
- Each burner to have 2 branches with 4 flame lines.
- Piezo ignition.
- Gas heated, 8 kW burners, hob.
- Hob top made of mild steel, smooth and easy to clean.
- Suitable for countertop installation.

Construction

- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- IPX5 water resistance certification.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- Unit is 900mm deep to give a larger working surface area.

Optional Accessories

PNC Code	Description
Bridge supports	
206137	Support for bridge type installation, 800 mm
206138	Support for bridge type installation, 1000 mm
206139	Support for bridge type installation, 1200 mm
206140	Support for bridge type installation, 1400 mm
206141	Support for bridge type installation, 1600 mm
206154	Support for bridge type installation, 400 mm
Chimney upstands	
206126	Draught diverter, 120 mm diameter
206127	Matching ring for flue condenser, 120 -130 mm diameter
206303	Chimney upstand, 400 mm
206310	Flue condenser for 1/2 module, 120 mm diameter
206400	Chimney grid net, 400mm
Handrails	
206165	Side handrail for right/left hand
206166	Frontal handrail 400 mm
206167	Frontal handrail 800 mm
206185	Large handrail (portioning shelf) 400 mm
206186	Large handrail (portioning shelf) 800 mm
206191	Frontal handrail 1200 mm
206192	Frontal handrail 1600 mm
Installation solutions	
206086	Junction sealing kit
Other accessories	
927225	Pressure regulator for gas units
Water taps	
206289	Water column with swivel arm (water column extension not included)
206290	Water column extension
Other accessories	
206321	2 side covering panels, height 250 mm, depth 900 mm

Technical specifications


Gas

Gas Power:	8 kW
Standard gas delivery:	Natural Gas G20 (20mbar)
Gas Type Option:	LPG;Natural Gas
Gas Inlet:	1/2"


Key Information:

Cooking Surface Depth:	[[TechSpec].fCookSurfDepth VALUE NOT FOUND] mm
Cooking Surface Width:	[[TechSpec].fCookSurfWidth VALUE NOT FOUND] mm
Working Temperature MIN:	°C
Working Temperature MAX:	°C
Net weight:	53 kg
Shipping weight (gross):	58 kg
Shipping height:	540 mm
Shipping width:	460 mm
Shipping depth:	1020 mm
Shipping volume:	0.25 m³
Certification group:	N9RG


Front



Side

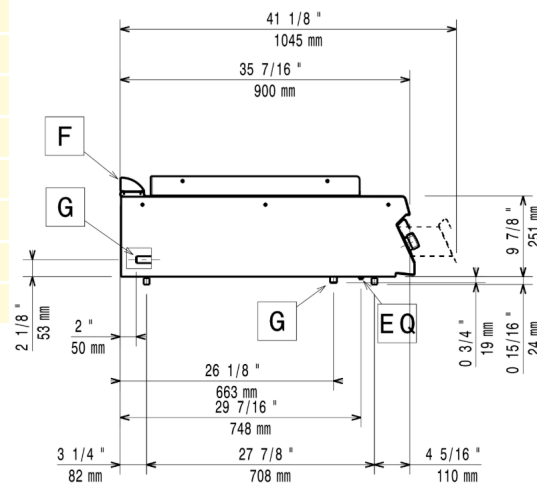

Top

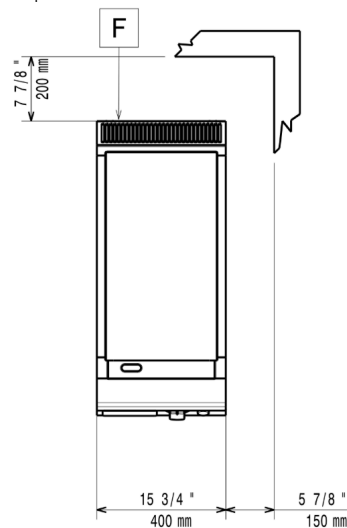

G = Gas connection
EQ = Equipotential screw

