

**392044 (Z9IRED2000)**

2-zone (3,4 kW each) electric infrared cooking top

Main Features

- Ceramic glass top cooking surface with 2 infrared heating zones 6 mm thick.
- Immediate heat transfer from cooking top to pan.
- IPX5 water protection.
- Low heat dissipation to the kitchen.
- The cooking top is sealed to prevent infiltration inside the unit.
- The smooth glass-ceramic surface can be quickly and easily cleaned, thus providing maximum hygiene.
- Warning light to indicate residual surface heat.
- The circular concentric heating sections measuring from 180 to 300 mm give uniform heat also to the largest pan.
- Suitable for countertop installation.

Construction

- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- AISI 304 stainless steel worktop, 2mm thick.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- Unit is 900mm deep to give a larger working surface area.

Sustainability

- Energy regulation of each zone.

Optional Accessories

PNC Code	Description
Bridge supports	
206137	Support for bridge type installation, 800 mm
206138	Support for bridge type installation, 1000 mm
206139	Support for bridge type installation, 1200 mm
206140	Support for bridge type installation, 1400 mm
206141	Support for bridge type installation, 1600 mm
206154	Support for bridge type installation, 400 mm
Chimney upstands	
206303	Chimney upstand, 400 mm
Feet, wheels and ramps	
206135	4 wheels, 2 swivelling with brake (EVO700/900). It is mandatory to install with base supports for feet/wheels.
Handrails	
206165	Side handrail for right/left hand
206166	Frontal handrail 400 mm
206167	Frontal handrail 800 mm
206185	Large handrail (portioning shelf) 400 mm
206186	Large handrail (portioning shelf) 800 mm
206191	Frontal handrail 1200 mm
206192	Frontal handrail 1600 mm
206308	Back handrail 800 mm
206309	BACK HANDRAIL 1200 MM
Installation solutions	
206086	Junction sealing kit
Water taps	
206289	Water column with swivel arm (water column extension not included)
206290	Water column extension
Other accessories	
206321	2 side covering panels, height 250 mm, depth 900 mm

Technical specifications


Electric

Supply voltage:	380-400 V/3N ph/50/60 Hz
Total Watts:	6.8 kW
Predisposed for:	380-400V 3N~ 50/60Hz 6-6,8kW


Key Information:

Net weight:	24.5 kg
Shipping weight (gross):	34 kg
Shipping height:	540 mm
Shipping width:	460 mm
Shipping depth:	1020 mm
Shipping volume:	0.25 m ³
Certification group:	N9CIE
Front Plates Power:	3.4 - 0 kW
Back Plates Power:	3.4 - 0 kW
Front Plates dimensions:	Ø 300
Back Plates dimensions:	Ø 300


Front



Side

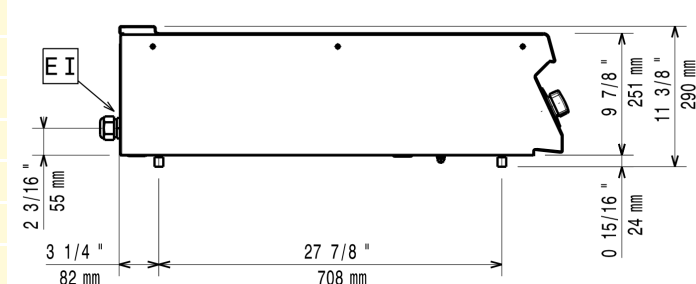

Top

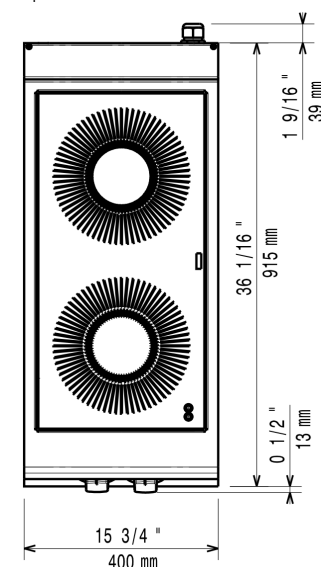

EI = Electrical inlet (power)
EQ = Equipotential screw

