

**392105 (Z9BSGLIUFE)**

250-lt gas boiling pan, indirect heating

**Main Features**

- Appliance is IPX5 water resistance certified.
- Discharge tube and tap are very easy to clean from outside.
- Ergonomic: the depth of the vessel facilitates stirring the food, also the most delicate food.
- External valve allows to manually evacuate excess air accumulated in the jacket during heating phase.
- Pressed cooking vessel and lid in 316 AISI Stainless steel.
- Kettle is suitable to cook, sauté or poach all kinds of produce.
- Large capacity food tap enables safe and effortless discharging of contents.
- No overshooting of cooking temperatures, fast reaction.
- Produce is uniformly heated in the base and side walls of the kettle by an indirect heating system that uses integrally generated saturated steam at a temperature of 110° C in the jacket.
- Safety thermostat protects against low water level.
- Smooth large surfaces, easy access for cleaning.
- Solenoid valve to refill with hot and cold water.
- The special design of the control knob system guarantees against water infiltration.

**Construction**

- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Robust burners in stainless steel with flame failure device, protected pilot light and optimized combustion.
- All exterior panels in Stainless Steel with Scotch Brite finishing.

**Sustainability**

- Closed heating system – no waste of energy.
- Firmly fitting cover to reduce cooking time and save energy costs.
- Pressure switch control monitors energy and water consumption.

## Included Accessories

| PNC Code | Description                                                | Quantity |
|----------|------------------------------------------------------------|----------|
| 927222   | Water additive against corrosion for indirect boiling pans | 1        |

## Optional Accessories

| PNC Code | Description |
|----------|-------------|
|----------|-------------|

### Chimney upstands

|        |                                                   |
|--------|---------------------------------------------------|
| 206132 | Draught diverter, 150 mm diameter                 |
| 206133 | Matching ring for flue condenser, 150 mm diameter |
| 206246 | Flue condenser for 1 module, 150 mm diameter      |

### Feet, wheels and ramps

|        |                                                                        |
|--------|------------------------------------------------------------------------|
| 206136 | Flanged feet kit                                                       |
| 206210 | 4 feet for concrete installation (not for 900 line freestanding grill) |

### Gas nozzles

|        |                                                        |
|--------|--------------------------------------------------------|
| 206469 | Kit G.25.3 (NI) gas nozzles for 900 250lt boiling pans |
|--------|--------------------------------------------------------|

### Installation solutions

|        |                      |
|--------|----------------------|
| 206086 | Junction sealing kit |
|--------|----------------------|

### Kicking strips

|        |                             |
|--------|-----------------------------|
| 206180 | Pair of side kicking strips |
|--------|-----------------------------|

### Other accessories

|        |                                  |
|--------|----------------------------------|
| 927225 | Pressure regulator for gas units |
|--------|----------------------------------|

### Panels

|        |                                     |
|--------|-------------------------------------|
| 206376 | Rear paneling - 1200mm (EVO700/900) |
|--------|-------------------------------------|

### Other accessories

|        |                                                     |
|--------|-----------------------------------------------------|
| 206335 | 2 side covering panels, height 700 mm, depth 900 mm |
|--------|-----------------------------------------------------|

# Technical specifications

## Electric

|                 |                      |
|-----------------|----------------------|
| Supply voltage: | 230 V/1N ph/50/60 Hz |
| Total Watts:    | 0.05 kW              |


## Gas

|                        |                          |
|------------------------|--------------------------|
| Gas Power:             | 35 kW                    |
| Standard gas delivery: | Natural Gas G20 (20mbar) |
| Gas Type Option:       | LPG; Natural Gas         |
| Gas Inlet:             | 3/4"                     |


## Key Information:

|                            |                     |
|----------------------------|---------------------|
| Pan useful capacity:       | 240 liter           |
| Vessel (rectangle) width:  | 1040 mm             |
| Vessel (rectangle) height: | 485 mm              |
| Vessel (rectangle) depth:  | 550 mm              |
| Net weight:                | 222 kg              |
| Shipping weight (gross):   | 241 kg              |
| Shipping height:           | 1240 mm             |
| Shipping width:            | 1260 mm             |
| Shipping depth:            | 1000 mm             |
| Shipping volume:           | 1.56 m <sup>3</sup> |
| Certification group:       |                     |


Front

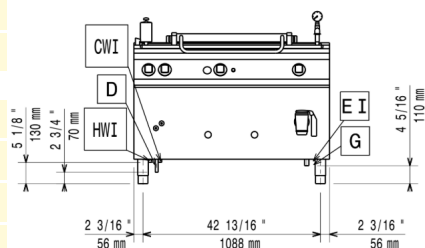

Side

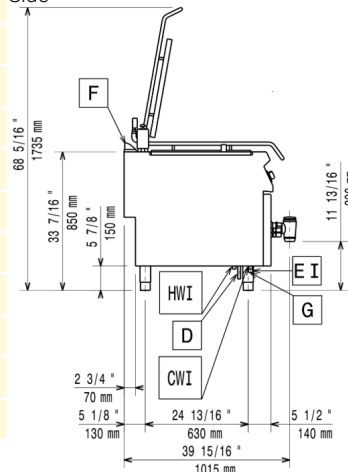

Top

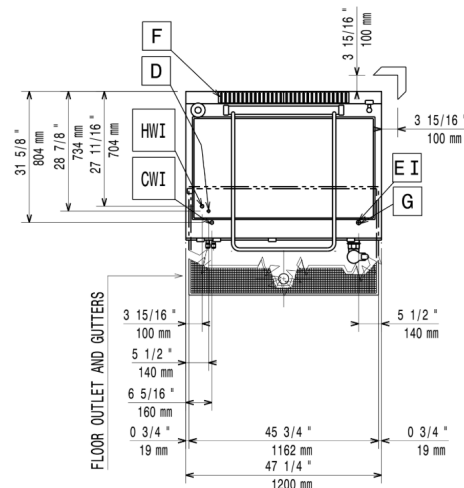

CWI1 = Cold Water inlet 1 (cleaning)

D = Drain

G = Gas connection

EI = Electrical inlet (power)

HWI = Hot water inlet

