

**392666 (Z9HHEDBAMCA)**

EvoPro Free-zone induction cook top, electric, 8 coils (2kW each)

Main Features

- Low heat dissipation to the kitchen.
- The smooth, glass ceramic plate is not directly heated, so there is no burning on cooking surface.
- The free zone induction offers the possibility to use multiple pots and pans, even small sizes (min diameter 7 cm), thanks to the multi-coil system design that makes all the surface active, ideal for à la carte menu.
- The smooth glass-ceramic surface features limited temperature increase and it can be quickly and easily cleaned, thus providing maximum hygiene.
- Each zone UI features a display and a knob, controlling simultaneously the 4 coils in the same zone.
- Power level setting from 1 to 30 or temperature settings from 30 to 250° C.

Construction

- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- IPX5 water resistance certification.
- One piece pressed 2 mm work top in Stainless steel.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- Unit is 930 mm deep to give a larger working surface area.
- Closed technical base, containing generators, ventilation system and filters.
- All major components may be easily accessed from the front, including the induction filters.
- Minimum pan base diameter: 7cm.
- Electronic sensor, placed underneath the glass, below the coil center position, to measure the temperature of the pan/pot bottom.
- 8 coils - 2 kW each.

Sustainability

- This model is compliant with Swiss Energy Efficiency Ordinance (730.02).

Optional Accessories


PNC Code	Description
Bridge supports	
206137	Support for bridge type installation, 800 mm
206138	Support for bridge type installation, 1000 mm
206139	Support for bridge type installation, 1200 mm
206140	Support for bridge type installation, 1400 mm
206141	Support for bridge type installation, 1600 mm
206154	Support for bridge type installation, 400 mm
Chimney upstands	
206303	Chimney upstand, 400 mm
Installation solutions	
206086	Junction sealing kit
Water taps	
206290	Water column extension
Other accessories	
206321	2 side covering panels, height 250 mm, depth 900 mm

Technical specifications


Electric

Supply voltage:	380-415 V/3N ph/50-60 Hz
Total Watts:	16 kW
Key Information:	
External dimensions, Width:	400 mm
External dimensions, Depth:	900 mm
External dimensions, Height:	850 mm
Net weight:	71.5 kg
Shipping weight (gross):	82 kg
Shipping height:	1080 mm
Shipping width:	480 mm
Shipping depth:	1020 mm
Shipping volume:	0.53 m³
Certification group:	IH920


Front

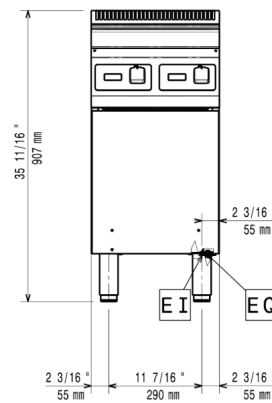

Side

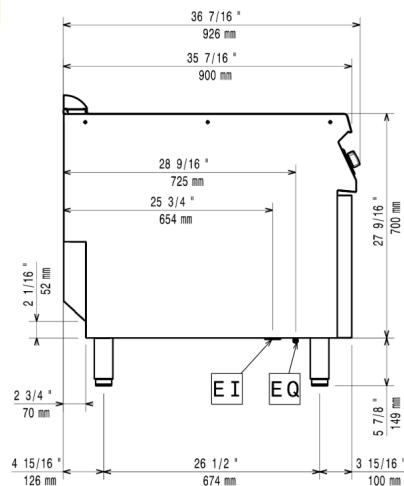

Top

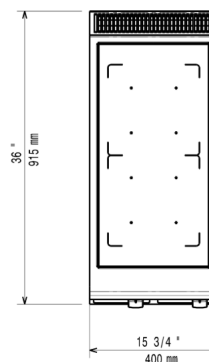

EI = Electrical inlet (power)
EQ = Equipotential screw

