

**372026 (Z7IREH40E0)**

4-zone (2,2 kW each) infrared cooking range on electric oven (6 kW)

Main Features

- Base compartment consists of an electric standard oven with thick oven door for heat insulation, positioned beneath the base plate.
- Ceramic glass top cooking surface with 4 infrared heating zones 6 mm thick.
- Immediate heat transfer from cooking top to pan.
- IPx4 water protection.
- Low heat dissipation to the kitchen.
- Oven thermostat adjustable from 140 °C to 300 °C.
- The circular concentric heating sections measuring 230 mm give uniform heat also to the largest pan.
- The cooking top is sealed to prevent infiltration inside the unit.
- The smooth glass-ceramic surface can be quickly and easily cleaned, thus providing maximum hygiene.
- Warning light to indicate residual surface heat.
- Stainless steel oven chamber with 3 levels of runners to accommodate 2/1 GN shelves (2 steam pans).
- Heating via ultra high powered heating elements.

Construction

- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- One piece pressed 1.5 mm work top in Stainless steel.
- All exterior panels in Stainless Steel with Scotch Brite finishing.

Sustainability

- Energy regulation of each zone.

Included Accessories

PNC Code	Description	Quantity
164250	GN2/1 chrome grid for static oven	1

Optional Accessories

PNC Code	Description
Chimney upstands	
206304	Chimney upstand, 800 mm
206400	Chimney grid net, 400mm
Containers, trays and grids	
164250	GN2/1 chrome grid for static oven
Feet, wheels and ramps	
206135	4 wheels, 2 swivelling with brake (EVO700/900). It is mandatory to install with base supports for feet/wheels.
206136	Flanged feet kit
206210	4 feet for concrete installation (not for 900 line freestanding grill)
206367	Base support for feet or wheels - 800mm (EVO700/900)
206368	Base support for feet or wheels - 1200mm (EVO700/EVO900)
206369	Base support for feet or wheels - 1600mm (EVO700/900)
Handrails	
206167	Frontal handrail 800 mm
206186	Large handrail (portioning shelf) 800 mm
206191	Frontal handrail 1200 mm
206192	Frontal handrail 1600 mm
206240	Right and left side handrails
206308	Back handrail 800 mm
Installation solutions	
206086	Junction sealing kit
Kicking strips	
206148	Frontal kicking strip for concrete installation, 800 mm
206150	Frontal kicking strip for concrete installation, 1000 mm
206151	Frontal kicking strip for concrete installation, 1200 mm
206152	Frontal kicking strip for concrete installation, 1600 mm
206176	Frontal kicking strip, 800 mm
206177	Frontal kicking strip, 1000 mm
206178	Frontal kicking strip, 1200 mm
206179	Frontal kicking strip, 1600 mm
206249	Pair of side kicking strips
206265	Pair of side kicking strips (concrete installation)
Panels	
206374	Rear paneling - 800mm (EVO700/900)
206375	Rear paneling - 1000mm (EVO700/900)
206376	Rear paneling - 1200mm (EVO700/900)



Modular Cooking Range Line
EVO700 4-Zone Electric Infrared Cooking Top
Range on Electric Oven

PNC Code	Description
Water taps	
206291	Water column extension
Other accessories	
206319	2 side covering panels, height 700 mm, depth 700 mm

Technical specifications


Electric

Supply voltage:	380-400 V/3N ph/50/60 Hz
Total Watts:	14.8 kW
Predisposed for:	380-400V 3N~ 50/60Hz 13,6-14,8kW


Key Information:

Oven working Temperature:	140 °C MIN; 300 °C MAX
Oven Cavity Dimensions (width):	540 mm
Oven Cavity Dimensions (height):	300 mm
Oven Cavity Dimensions (depth):	650 mm
Net weight:	85 kg
Shipping weight (gross):	96 kg
Shipping height:	1140 mm
Shipping width:	820 mm
Shipping depth:	860 mm
Shipping volume:	0.8 m³
Certification group:	N7CIE
Front Plates Power:	2.2 - 2.2 kW
Back Plates Power:	2.2 - 2.2 kW
Front Plates dimensions:	Ø 230 Ø 230
Back Plates dimensions:	Ø 230 Ø 230


Front

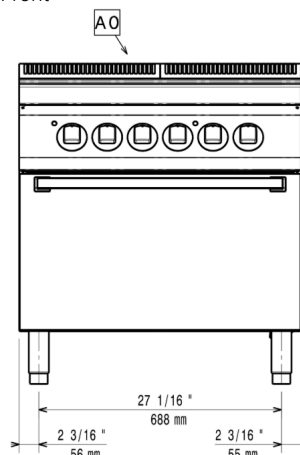

Side

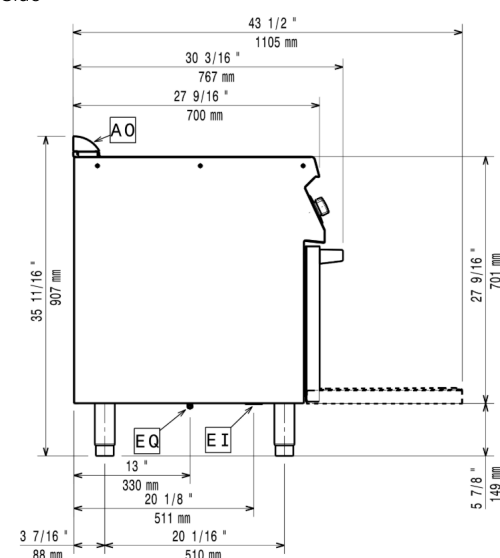

Top



El = Electrical inlet (power)

EQ = Equipotential screw

