

**600890 (Z1HAEDOMCS)**

Plug-in Induction Double Zone Cook Top, drop-in

Main Features

- Automatic pan detection to transfer power only when pan is present.
- 2-color user interface (white and red) for better readability.
- 2 independently controlled cooking zone.
- Suitable for pots and pans with diameter from 120 mm to 240 mm for each cooking zone.
- Glass touch display on top for maximum visibility.
- Power level settings from 1 to 10.
- Timer function can be used to set the cooking time, switching off the zone automatically at the end of the time set.
- Self-diagnostics: an error code is displayed (Exxx) in case of dysfunction.
- Plug in unit designed for drop in installations.
- BRIDGE FUNCTION allows to combine the two separate cooking zones to create a single large surface suitable for rectangular pan of max dimensions of 350x450mm.
- Maximum usable power: 3.5 kW. The user interface shows the power level selectable on each cooking zone according to the power used.

Construction

- Sealed heavy duty glass-ceramic cooking surface, 4 mm in thickness.
- IPx4 water protection.
- Heavy duty AISI 304 Stainless steel construction.
- Cord and plug included.

Sustainability

- Rapid heat transfer directly to the pan, no heat is dispersed into the environment.
- This model is compliant with Swiss Energy Efficiency Ordinance (730.02).

Optional Accessories

PNC Code	Description
Installation solutions	
650146	Kit ventilation including air conveyor for Drop-in functions
650147	Kit fixation including sponge gasket and kit assembly for Drop-in functions

Recommended Detergents

PNC Code	Description
0S2881	S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T
0S2882	S02 DEGREASER 6pzx750ml - ADR&IMDG Limited Quantity
0S2883	S03 ALCOHOL BASE DETERGENT; 6 BOTTLES X 750ML; ADR&IMDG&IATA Limited Quantity
0S2884	S04 GLASSES & HARD SURFACES CLEANERS; 6 BOTTLES X 750ML

Technical specifications


Electric

Supply voltage:	220-240 V/1N ph/50-60 Hz
Front Plate Watts:	3.5 kW
Back Plate Watts:	3.5 kW
Plug type:	CE-SCHUKO
Minimum Circuit Ampacity (MCA):	16A


Key Information:

External dimensions, Width:	392 mm
External dimensions, Depth:	592 mm
External dimensions, Height:	127 mm
Net weight:	14.5 kg


Side

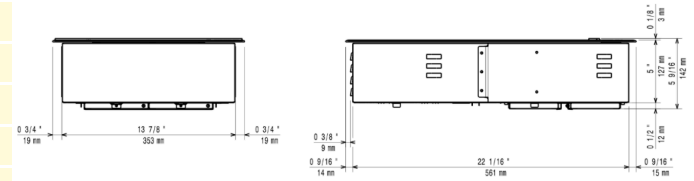

Top

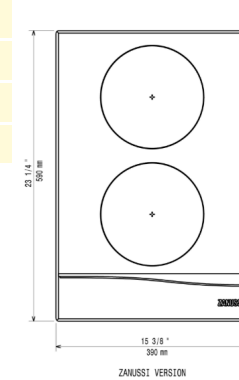

Other

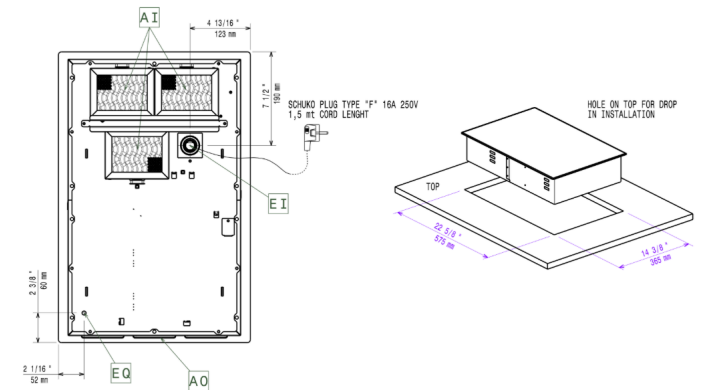

EI = Electrical inlet (power)
EO = Electrical Outlet

