

Modular Cooking Range Line EVO700 6-Hot Plates Electric Boiling Top Range

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



372019 (Z7ECEL6R00)

6-hot plate (2,6 kW each)
electric boiling top

Short Form Specification

Item No. _____

To be installed on open base installations, bridging supports or cantilever systems. Six 2.6 kW cast-iron hot plates hermetically sealed to the one-piece top. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- The six 2.6kW cast-iron plates are hermetically sealed to the one-piece top.
- The special design of the control knob system guarantees against water infiltration.
- IPx4 water protection.
- Suitable for countertop installation.

Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

APPROVAL: _____

Optional Accessories


- | | | |
|--|------------|--------------------------|
| • Support for bridge type installation, 1200 mm | PNC 206139 | ☐ |
| • Support for bridge type installation, 1400 mm | PNC 206140 | ☐ |
| • Support for bridge type installation, 1600 mm | PNC 206141 | ☐ |
| • Frontal handrail 1200 mm | PNC 206191 | ☐ |
| • Frontal handrail 1600 mm | PNC 206192 | ☐ |
| • Right and left side handrails | PNC 206240 | ☐ |
| • Water column with swivel arm (water column extension not included) | PNC 206289 | ☐ |
| • Water column extension | PNC 206291 | ☐ |
| • Chimney upstand, 800 mm | PNC 206304 | ☐ |
| • 2 side covering panels, height 250 mm, depth 700 mm | PNC 206320 | ☐ |
| • Chimney grid net, 400mm | PNC 206400 | ☐ |

Modular Cooking Range Line


EVO700 6-Hot Plates Electric

Boiling Top Range

Front

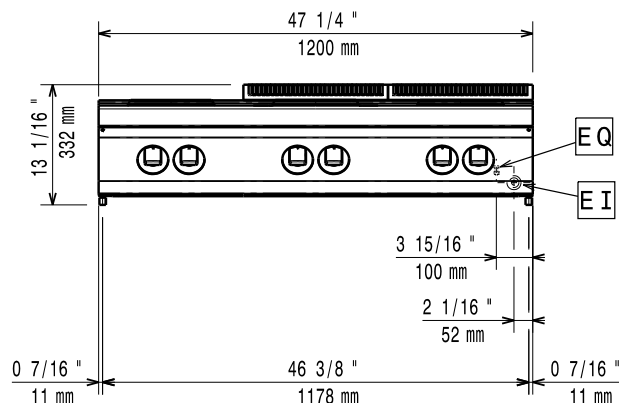


Side

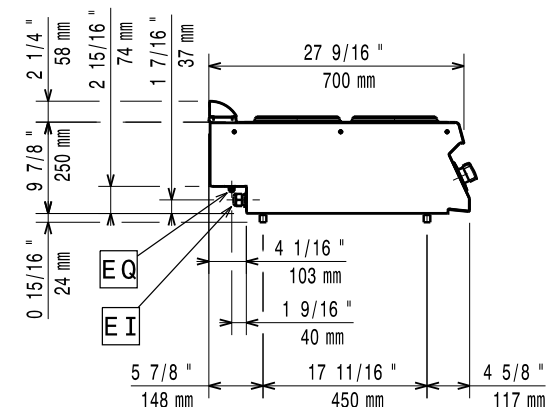

EI = Electrical inlet (power)
 EQ = Equipotential screw

Top

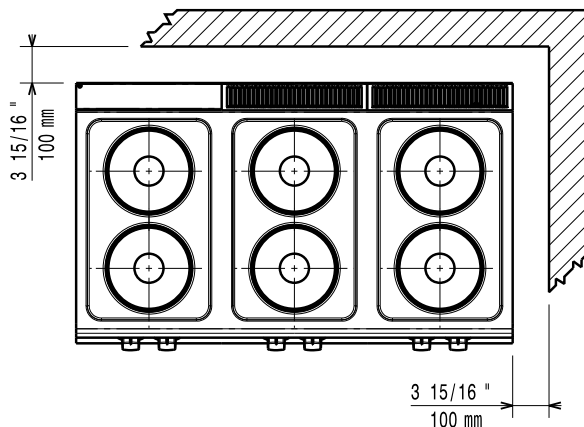

Electric

Supply voltage: 380-400 V/3 ph/50-60 Hz
 Predisposed for:
 Total Watts: 15.6 kW

Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Net weight: 60 kg
 Shipping weight: 55 kg
 Shipping height: 540 mm
 Shipping width: 830 mm
 Shipping depth: 1300 mm
 Shipping volume: 0.58 m³
 Certification group: EH76T
 Front Plates Power: 2.6 - 2.6 kW
 Back Plates Power: 2.6 - 2.6 kW
 Front Plates dimensions: Ø 230 Ø 230
 Back Plates dimensions: Ø 230 Ø 230