

**392047 (Z9HOEH4000)**

Full module electric hob with mild steel top

Main Features

- 4 heating zones independently controlled.
- All major compartments located in front of unit for ease of maintenance.
- Pans can easily be moved from one area to another without lifting.
- Setting different temperature zones provides a temperature gradient over the plate for different cooking needs.
- The special design of the control knob system guarantees against water infiltration.
- Various sizes of pans can be used at the same time due to large surface area with no intermediate sectors.
- Heating via armoured elements.
- Hob top made of mild steel, smooth and easy to clean.
- Suitable for countertop installation.

Construction

- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- IPX5 water resistance certification.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- Unit is 930 mm deep to give a larger working surface area.
- Unit is 900mm deep to give a larger working surface area.

Optional Accessories

PNC Code	Description
Chimney upstands	
206132	Draught diverter, 150 mm diameter
206133	Matching ring for flue condenser, 150 mm diameter
Feet, wheels and ramps	
206367	Base support for feet or wheels - 800mm (EVO700/900)
Handrails	
206165	Side handrail for right/left hand
206167	Frontal handrail 800 mm
206185	Large handrail (portioning shelf) 400 mm
206186	Large handrail (portioning shelf) 800 mm
206191	Frontal handrail 1200 mm
206192	Frontal handrail 1600 mm
Installation solutions	
206086	Junction sealing kit
Panels	
216278	2 SIDE COVERING PANELS H=250-D=900-ELUX
Shelves	
206183	Half module overshelf
206184	Full module overshelf
Water taps	
206289	Water column with swivel arm (water column extension not included)
206290	Water column extension
Other accessories	
206321	2 side covering panels, height 250 mm, depth 900 mm

Technical specifications


Electric

Supply voltage:	380-400 V/3N ph/50-60 Hz
Total Watts:	14 kW


Key Information:

External dimensions, Width:	800 mm
External dimensions, Depth:	900 mm
External dimensions, Height:	250 mm
Net weight:	105 kg
Shipping weight (gross):	94 kg
Shipping height:	540 mm
Shipping width:	900 mm
Shipping depth:	1020 mm
Shipping volume:	0.5 m ³


Front

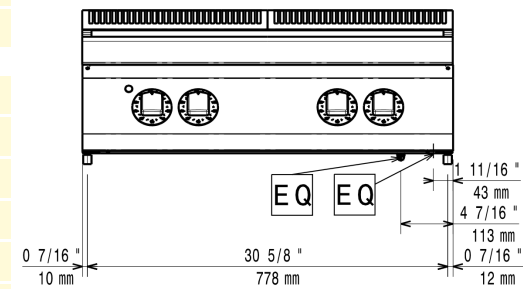

Side

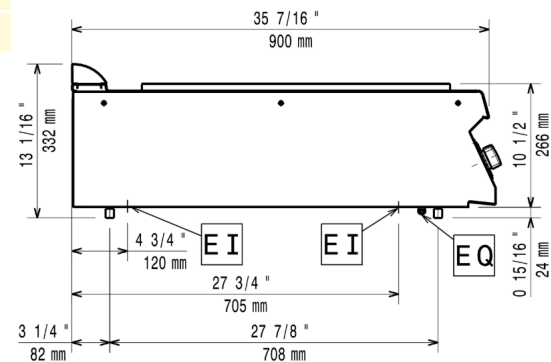

Top

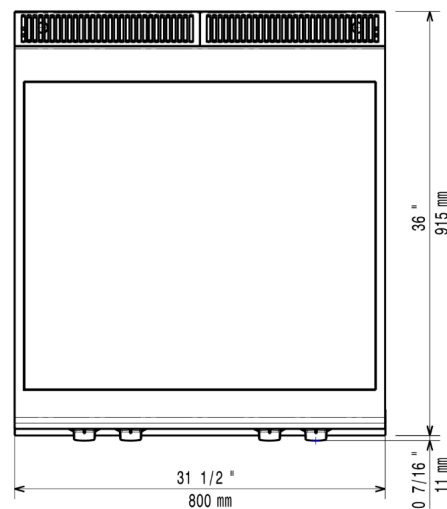

EI = Electrical inlet (power)
EQ = Equipotential screw

