

**602351 (Z1IREDOMES)**

Plug-in induction Griddle XL, stainless steel smooth plate - 3-phase

Main Features

- 2-color user interface (white and red) for better readability.
- Non-stick cooking plate.
- Scraper, 4 feet, cord and plug included.
- Temperature set from 60 to 280 °C with possibility of fine tuning of + or - 1 °C.
- Plug in unit designed for table top installations.
- Self-diagnostics: an error code is displayed (Exxx) in case of dysfunction.
- Outstanding cooking evenness and fast recovery time.
- Glass touch display on top for maximum visibility with temperature indication.
- Safety first. Visual message displayed when the hob is still hot to prevent injuries.
- 2 independently controlled cooking zones.
- Easy CookingPRO Bridge allows to combine the two separate cooking zones to create a single large surface.
- Designed for Easy CookingPRO Match function for automatic regulation of the Easy CookingPRO Counter fan speed according to cooking intensity.
- Cleaning function: set the right cooking surface temperature to activate C40 Rapid Grease detergent.

Construction

- IPx4 water protection.
- Grease collection drawer capacity 1,2 lt (for double zone model).
- Integrated grease drain with drawer removable under the cooking surface.
- 4 sides unique frame in AISI 304 2 mm thick.
- Induction air filters easy to clean and remove for monthly cleaning.
- 9.5 mm cooking plate in 3 layers with aluminum in the center.

Sustainability

- Energy efficiency guaranteed by induction technology.

Recommended Detergents

PNC Code	Description
0S2292	C41 HI-TEMP RAPID DEGREASER 6pcx1L+1 trigger
0S2881	S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T
0S2882	S02 DEGREASER 6pzx750ml - ADR&IMDG Limited Quantity
0S2883	S03 ALCOHOL BASE DETERGENT; 6 BOTTLES X 750ML; ADR&IMDG&IATA Limited Quantity
0S2884	S04 GLASSES & HARD SURFACES CLEANERS; 6 BOTTLES X 750ML

Technical specifications


Electric

Supply voltage:	380-415 V/3N ph/50-60 Hz
Total Watts:	7 kW
Plug type:	IEC/EN 60309-1/2
Minimum Circuit Ampacity (MCA):	16A


Key Information:

Working Temperature MIN:	60 °C
Working Temperature MAX:	280 °C
External dimensions, Width:	800 mm
External dimensions, Depth:	600 mm
External dimensions, Height:	227 mm
Net weight:	48 kg
Cooking surface size, (W/D):	790 / 410 mm


Side

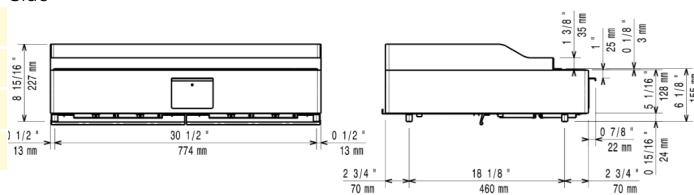

Top

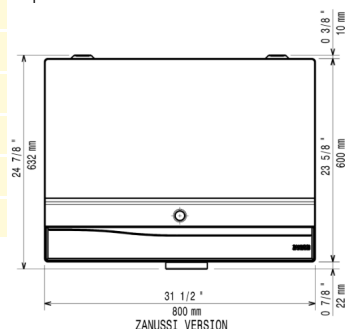

Other

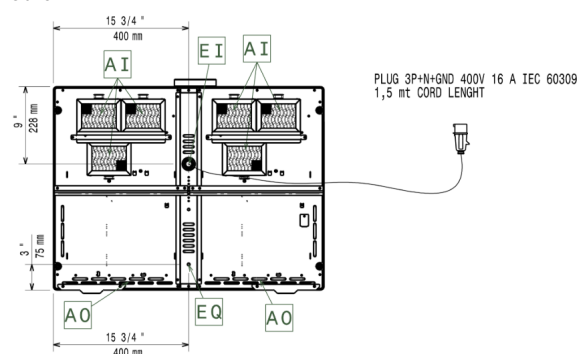

EI = Electrical inlet (power)

EO = Electrical Outlet



Part of



**Electrolux
Professional
Group**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

www.zanussiprofessional.com

2026/07/28

3/3