

**392277 (Z9INED2008)**

2-zone (5 kW each) electric induction cooking top

Main Features

- Almost the entire surface of the ceramic plate can be used without "dead" spots.
- Glass ceramic cooking surface with 2 independently controlled induction zones with a power of 5 kW per zone.
- Induction plates endowed with overheating safety device.
- IPX5 water protection.
- Low heat dissipation to the kitchen.
- One indicating lamp for each zone located on control console.
- Power to the individual zones can be set with progressive output i.e. fine regulation at the lower and larger progress at the upper levels.
- The smooth, glass ceramic plate is not directly heated, so there is no burning on cooking surface.
- Pots diameter to be used : min 12cm, max 28 cm in order to obtain maximum heating efficiency.
- Suitable for countertop installation.

Construction

- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- AISI 304 stainless steel worktop, 2mm thick.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- Unit is 900mm deep to give a larger working surface area.

Sustainability

- This model is compliant with Swiss Energy Efficiency Ordinance (730.02).

Optional Accessories

PNC Code	Description
Bridge supports	
206137	Support for bridge type installation, 800 mm
206138	Support for bridge type installation, 1000 mm
206139	Support for bridge type installation, 1200 mm
206140	Support for bridge type installation, 1400 mm
206141	Support for bridge type installation, 1600 mm
206154	Support for bridge type installation, 400 mm
Chimney upstands	
206303	Chimney upstand, 400 mm
Installation solutions	
206086	Junction sealing kit
Water taps	
206290	Water column extension
Other accessories	
206321	2 side covering panels, height 250 mm, depth 900 mm

Technical specifications


Electric

Supply voltage:	380-415 V/3 ph/50/60 Hz
Total Watts:	10 kW
Predisposed for:	380-415V 3~ 50/60Hz 10kW


Key Information:

Net weight:	40 kg
Shipping weight (gross):	45 kg
Shipping height:	520 mm
Shipping width:	500 mm
Shipping depth:	1020 mm
Shipping volume:	0.27 m ³
Certification group:	IH920
Induction Top Dimensions (width):	400 mm
Induction Top Dimensions (depth):	900 mm


Front



Side

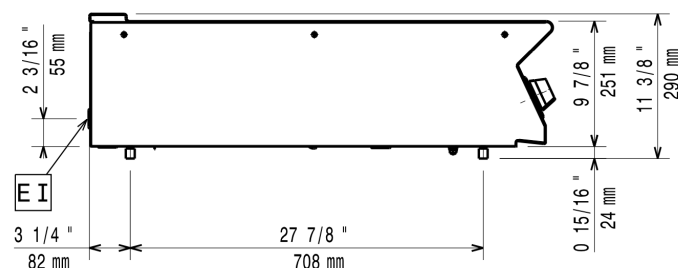

Top

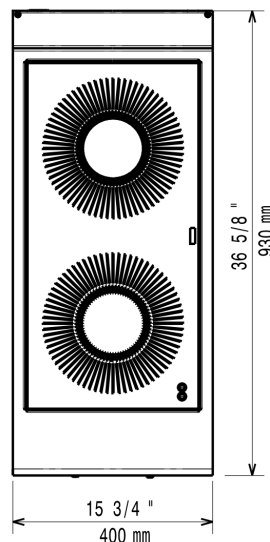

EI = Electrical inlet (power)

EQ = Equipotential screw

