

**372012 (Z7STGL5000)**

Simple service, central gas solid top (3,8 kW) with 2 burners (5,5 kW) on the left and 2 burners (5,5 kW) on the right, 1200 mm

**Main Features**

- All major compartments located in front of unit for ease of maintenance.
- Durable cast iron cooking plate, easy to clean.
- Burners with optimized combustion interchangeable on site.
- Central burner with optimized combustion, flame failure device and protected pilot light.
- Flame failure device on each burner protects against gas leakage when accidental extinguishing of the flame occurs.
- Gas heated, 3.8 kW central burner, solid top.
- Pans can easily be moved from one area to another without lifting.
- Temperature gradients to satisfy different cooking needs, provided over the whole plate thanks to the temperature fine-tuning by zone.
- The center of the plate can reach a maximum temperature of 500 °C while decreasing outwards.
- Various sizes of pans can be used at the same time due to large surface area with no intermediate sectors.
- Suitable for countertop installation.

**Construction**

- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- One piece pressed 1.5 mm work top in Stainless steel.
- IPx4 water protection.
- All exterior panels in Stainless Steel with Scotch Brite finishing.

## Optional Accessories

| PNC Code                              | Description                                                                       |
|---------------------------------------|-----------------------------------------------------------------------------------|
| <b>Bridge supports</b>                |                                                                                   |
| 206139                                | Support for bridge type installation, 1200 mm                                     |
| 206140                                | Support for bridge type installation, 1400 mm                                     |
| 206141                                | Support for bridge type installation, 1600 mm                                     |
| <b>Burner grids, plates, supports</b> |                                                                                   |
| 206260                                | Single burner smooth plate for direct cooking - fits frontal burners only         |
| 206261                                | Single burner ribbed plate for direct cooking- fits frontal burners only          |
| 206264                                | Single burner radiant plate for pan support                                       |
| 206297                                | Stainless steel grid for 2 burners                                                |
| 206363                                | Wok pan support for open burners (EVO700/900)                                     |
| <b>Chimney upstands</b>               |                                                                                   |
| 206400                                | Chimney grid net, 400mm                                                           |
| <b>Gas nozzles</b>                    |                                                                                   |
| 206461                                | Kit G.25.3 (NI) gas nozzles for 700 solid top and solid top combined with burners |
| <b>Handrails</b>                      |                                                                                   |
| 206191                                | Frontal handrail 1200 mm                                                          |
| 206192                                | Frontal handrail 1600 mm                                                          |
| 206240                                | Right and left side handrails                                                     |
| <b>Installation solutions</b>         |                                                                                   |
| 206086                                | Junction sealing kit                                                              |
| <b>Other accessories</b>              |                                                                                   |
| 927225                                | Pressure regulator for gas units                                                  |
| <b>Panels</b>                         |                                                                                   |
| 206320                                | 2 side covering panels, height 250 mm, depth 700 mm                               |
| <b>Water taps</b>                     |                                                                                   |
| 206289                                | Water column with swivel arm (water column extension not included)                |
| 206291                                | Water column extension                                                            |
| <b>Other accessories</b>              |                                                                                   |
| 206388                                | Kit town gas nozzles (G150) for EVO700 solid top and burner                       |

# Technical specifications


## Gas

|                        |                          |
|------------------------|--------------------------|
| Gas Power:             | 25.6 kW                  |
| Standard gas delivery: | Natural Gas G20 (20mbar) |
| Gas Type Option:       | ;LPG                     |
| Gas Inlet:             | 1/2"                     |


## Key Information:

|                                   |              |
|-----------------------------------|--------------|
| External dimensions, Width:       | 1200 mm      |
| External dimensions, Depth:       | 700 mm       |
| External dimensions, Height:      | 250 mm       |
| Net weight:                       | 70 kg        |
| Shipping weight (gross):          | 76.25 kg     |
| Shipping height:                  | 540 mm       |
| Shipping width:                   | 830 mm       |
| Shipping depth:                   | 1300 mm      |
| Shipping volume:                  | 0.58 m³      |
| Front Burners Power:              | 5.5 - 5.5 kW |
| Back Burners Power:               | 5.5 - 5.5 kW |
| Certification group:              | N7TG         |
| Back Burners Dimension - mm       | Ø 60 Ø 60    |
| Front Burners Dimension - mm      | Ø 60 Ø 60    |
| Solid top usable surface (width): | 690 mm       |
| Solid top usable surface (depth): | 595 mm       |


## Front

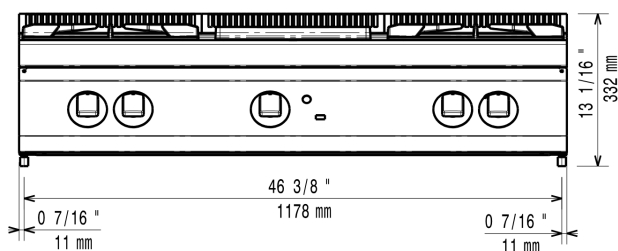

## Side

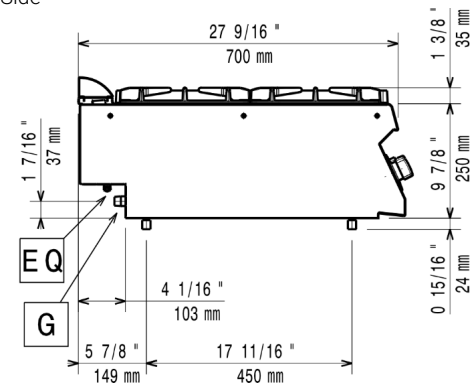

## Top

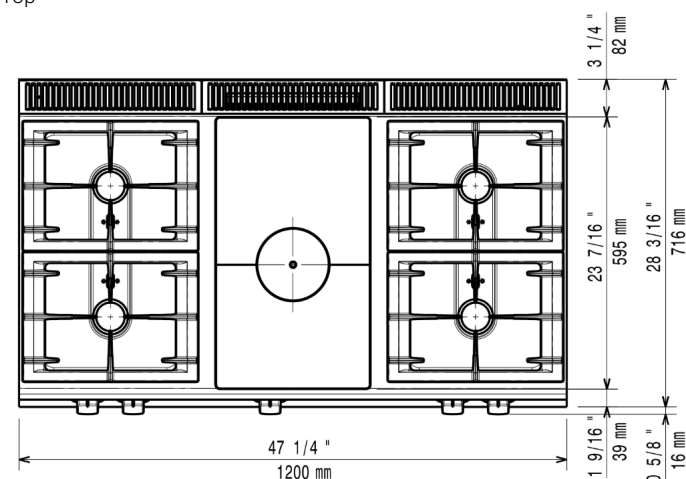

G = Gas connection

EQ = Equipotential screw

