

**392600 (Z9TTBECOMKN)**

Refrigerated base with 6 drawers, -2/+10 °C - R290

Main Features

- Adjustable temperature range from -2 °C to +10 °C to suit meat, fish and dairy storage requirements.
- Anti-tilt runners accept GN 1/1 containers.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Right angled side edges eliminate gaps and possible dirt traps between units.
- Unit can be easily installed below other 900 line top models.
- Defrosting and automatic evaporation of condense drain: the condense is automatically evaporated thanks to the electric resistance in the condense drain container.
- GN compliant.
- Designed for modular installation into the cooking block.

Construction

- Access to all components from the front.
- Built-in compressor to suit operating conditions.
- Exterior panels in Stainless steel with Scotch Brite finish to meet the highest hygiene standards.
- Unit delivered with 150 mm height adjustable feet in Stainless steel. Feet can be extended up to 250 mm.

Sustainability

- CFC and HCFC free (highly ecological refrigerant type: R290).

Optional Accessories

PNC Code	Description
Feet, wheels and ramps	
206136	Flanged feet kit
206430	Kit 3 base support for feet or wheels for refrigerated base or freezer base
206432	Kit 6 wheels - 3 swivelling with brake
Kicking strips	
206152	Frontal kicking strip for concrete installation, 1600 mm
206179	Frontal kicking strip, 1600 mm

Recommended Detergents

PNC Code	Description
0S2292	C41 HI-TEMP RAPID DEGREASER 6pcx1L+1 trigger
0S2881	S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T
0S2882	S02 DEGREASER 6pzx750ml - ADR&IMDG Limited Quantity
0S2883	S03 ALCOHOL BASE DETERGENT; 6 BOTTLES X 750ML; ADR&IMDG&IATA Limited Quantity
0S2884	S04 GLASSES & HARD SURFACES CLEANERS; 6 BOTTLES X 750ML
0S3257	S05 - MULTIPURPOSE DEGREASER; 6PCS X 750ML; ADR&IMDG Limited Quantity

Technical specifications

Electric

Supply voltage:	220-230 V/1N ph/50 Hz
Total Watts:	0.44 kW
Plug type:	CE-SCHUKO


Key Information:

External dimensions, Width:	1600 mm
External dimensions, Depth:	830 mm
External dimensions, Height:	600 mm
Net weight:	110 kg
Shipping weight (gross):	157 kg
Shipping height:	780 mm
Shipping width:	950 mm
Shipping depth:	1650 mm
Shipping volume:	1.22 m³
Gross capacity:	240 liter


Sustainability

Refrigerant weight:	85 g
---------------------	------


Front

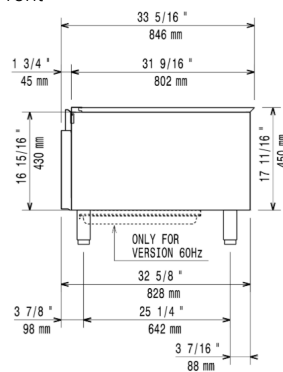

Side

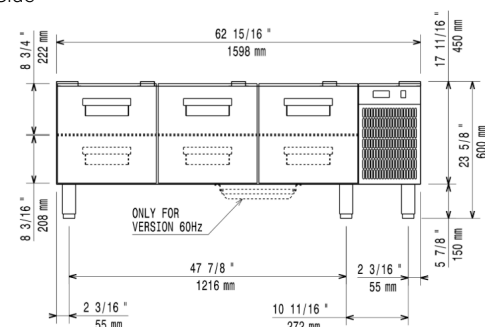

Top

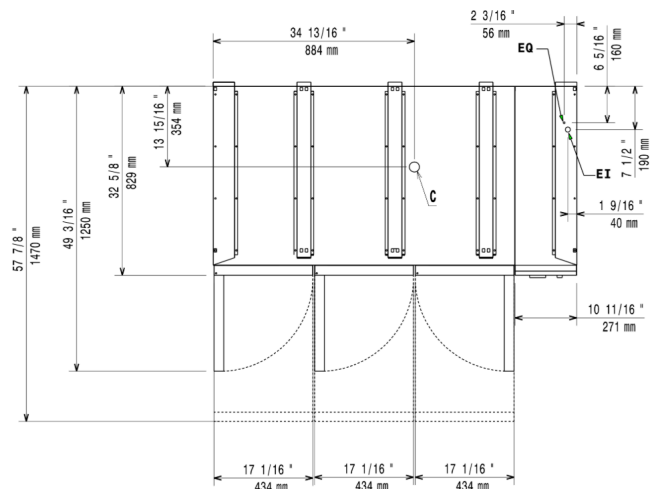

EI = Electrical inlet (power)



Part of



**Electrolux
Professional
Group**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

www.zanussiprofessional.com

2026/07/28

3/3