

**392268 (Z9GRTDGCPU)**

Gas grill, half module - free standing - town gas (Sweden)

Main Features

- Drip tray to collect residual cooking juices and fat.
- IPX5 water protection.
- The special design of the control knob system guarantees against water infiltration.
- Stainless steel AISI441 burners with self stabilizing flame.
- Burners are protected by deflection trays to prevent fat dripping on them.
- Stainless steel high splash guards on the rear and sides of cooking surface. Splash guards can be easily removed for cleaning and are dishwasher-safe.
- Energy regulation through a control knob.
- Monoblock structure gives better stability and easier installation.
- The cooking surface is double-sided: one for meat and the other for fish and vegetables.
- The drawer can be filled with water to obtain vapor to cook softer food and to facilitate the cleaning of the drawer.
- The low temperature of the external panels allow to work in safety.
- Cooking grids made in highly resistant enameled cast iron for easy cleaning.

Construction

- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- AISI 304 stainless steel worktop, 2mm thick.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- Unit is 900mm deep to give a larger working surface area.

Included Accessories

PNC Code	Description	Quantity
206422	Scraper for cast iron grills	1

Optional Accessories

PNC Code	Description
Chimney upstands	
206126	Draught diverter, 120 mm diameter
206127	Matching ring for flue condenser, 120 -130 mm diameter
206303	Chimney upstand, 400 mm
206310	Flue condenser for 1/2 module, 120 mm diameter
Cleaning solutions	
206421	Scraper for grids with drainage channels - top grills
206422	Scraper for cast iron grills
Containers, trays and grids	
206408	Stainless steel grid for free standing grills (EVO900)
206409	Stainless steel grid with drainage channels for free standing V-shaped grills (EVO900)
Feet, wheels and ramps	
206135	4 wheels, 2 swivelling with brake (EVO700/900). It is mandatory to install with base supports for feet/wheels.
206136	Flanged feet kit
206210	4 feet for concrete installation (not for 900 line freestanding grill)
206366	Base support for feet or wheels - 400mm (EVO700/900)
206367	Base support for feet or wheels - 800mm (EVO700/900)
206368	Base support for feet or wheels - 1200mm (EVO700/EVO900)
206369	Base support for feet or wheels - 1600mm (EVO700/900)
206370	Base support for feet or wheels - 2000mm (EVO700/900)
206431	Base support for feet/wheels (600mm)
Handrails	
206165	Side handrail for right/left hand
206166	Frontal handrail 400 mm
206167	Frontal handrail 800 mm
206185	Large handrail (portioning shelf) 400 mm
206186	Large handrail (portioning shelf) 800 mm
206191	Frontal handrail 1200 mm
206192	Frontal handrail 1600 mm
206308	Back handrail 800 mm
206309	BACK HANDRAIL 1200 MM
Installation solutions	
206086	Junction sealing kit

PNC Code	Description
Kicking strips	
206147	Frontal kicking strip for concrete installation, 400 mm
206148	Frontal kicking strip for concrete installation, 800 mm
206150	Frontal kicking strip for concrete installation, 1000 mm
206151	Frontal kicking strip for concrete installation, 1200 mm
206152	Frontal kicking strip for concrete installation, 1600 mm
206157	Pair of side kicking strips for concrete installation
206175	Frontal kicking strip, 400 mm
206176	Frontal kicking strip, 800 mm
206177	Frontal kicking strip, 1000 mm
206178	Frontal kicking strip, 1200 mm
206179	Frontal kicking strip, 1600 mm
206180	Pair of side kicking strips
Other accessories	
927225	Pressure regulator for gas units
Panels	
206181	2 panels for service duct (single installation)
206202	2 panels for service duct (back to back installation)
206373	Rear paneling - 600mm (EVO700/900)
206374	Rear paneling - 800mm (EVO700/900)
206375	Rear paneling - 1000mm (EVO700/900)
206376	Rear paneling - 1200mm (EVO700/900)
Water taps	
206280	Water filling tap for free standing grills (1 per each drawer)
Other accessories	
206335	2 side covering panels, height 700 mm, depth 900 mm

Technical specifications


Gas

Gas Power:	10 kW
Standard gas delivery:	Natural Gas G20 (20mbar)
Gas Type Option:	LPG;Town Gas
Gas Inlet:	3/4"


Key Information:

External dimensions, Width:	400 mm
External dimensions, Depth:	900 mm
External dimensions, Height:	850 mm
Net weight:	60 kg
Shipping weight (gross):	80 kg
Shipping height:	1040 mm
Shipping width:	500 mm
Shipping depth:	1060 mm
Shipping volume:	0.55 m³
Certification group:	N9GT
Cooking surface width:	316 mm
Cooking surface depth:	640 mm


Front

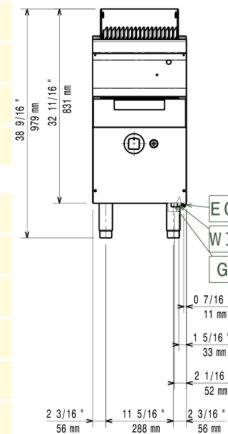

Side

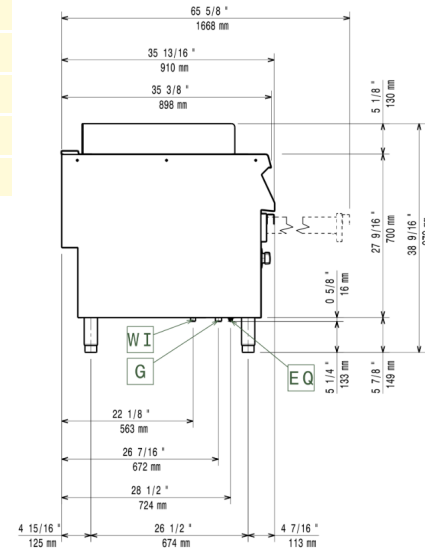

Top



G = Gas connection
EQ = Equipotential screw

