

Modular Cooking Range Line EVO900 One Well Electric Fryer 18 liter

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____

**392094 (Z9FRED1HF0)**

18-lt electric fryer with 1 well (internal heating elements), 2 half size baskets and lid included - free standing

392178 (Z9FRED1HFN)

18-lt electric fryer with 1 well (internal heating elements), 2 half size baskets and lid included - free standing

Short Form Specification

Item No. _____

High efficiency tilting incoloy armoured heating elements (16.5kW) placed inside the well. Deep drawn well. Oil drains through a tap into a container positioned under the well. Height adjustable feet in stainless steel. Exterior panels in stainless steel. Worktop in 20/10, stainless steel. Right-angled side edges eliminate gaps and possible dirt traps between units.

Main Features

- Thermostatic regulation of oil temperature up to a maximum of 185 °C.
- Overheat protection thermostat as standard on all units.
- Oil drains through a tap into a drainage container positioned under the well.
- All major compartments located in front of unit for ease of maintenance.
- The special design of the control knob system guarantees against water infiltration.
- Unit delivered with four 50 mm legs in stainless steel as standard (all round Stainless steel kick plates as option).
- Supplied as standard with 2 half size baskets and 1 right side door for cupboard.
- Incoloy armoured heating elements located inside the well can be lifted up for easier cleaning.
- Optional portable oil quality monitoring tool (code 9B8081) for efficient oil management.

Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Interior of well with rounded corners for ease of cleaning.
- IPX5 water resistance certification.
- Unit is 900mm deep to give a larger working surface area.

APPROVAL: _____

Included Accessories

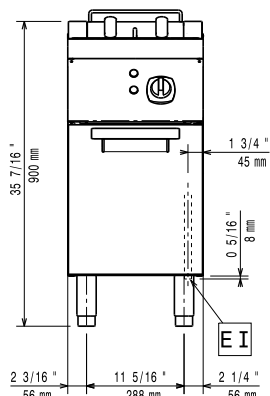
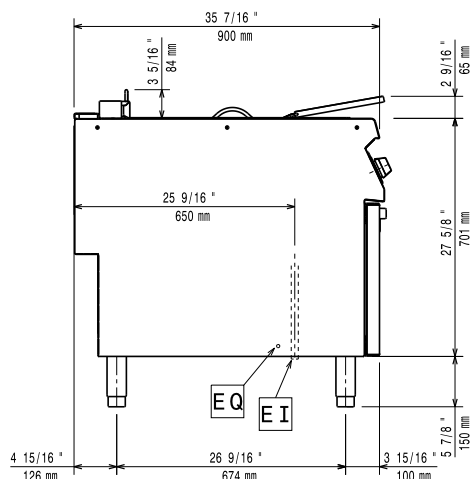
- 1 of Door for open base cupboard PNC 206342
- 1 of 2 half size baskets for 15lt OptiOil and 18/23lt fryers PNC 927223

Optional Accessories

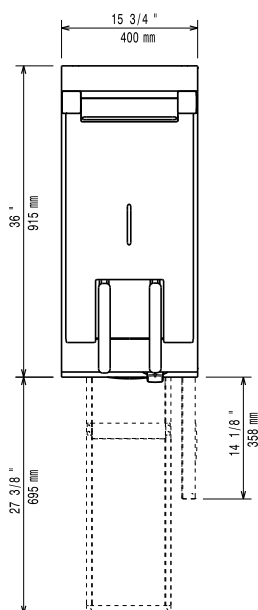
- Junction sealing kit (only for 392094) PNC 206086 ☐
- Flanged feet kit (only for 392094) PNC 206136 ☐
- Frontal kicking strip for concrete installation, 400 mm (only for 392094) PNC 206147 ☐
- Frontal kicking strip for concrete installation, 800 mm (only for 392094) PNC 206148 ☐
- Frontal kicking strip for concrete installation, 1000 mm (only for 392094) PNC 206150 ☐
- Frontal kicking strip for concrete installation, 1200 mm (only for 392094) PNC 206151 ☐
- Frontal kicking strip for concrete installation, 1600 mm (only for 392094) PNC 206152 ☐
- Pair of side kicking strips for concrete installation (only for 392094) PNC 206157 ☐
- Side handrail for right/left hand (only for 392094) PNC 206165 ☐
- Frontal handrail 400 mm (only for 392094) PNC 206166 ☐
- Frontal handrail 800 mm (only for 392094) PNC 206167 ☐
- Frontal kicking strip, 400 mm (only for 392094) PNC 206175 ☐
- Frontal kicking strip, 800 mm (only for 392094) PNC 206176 ☐
- Frontal kicking strip, 1000 mm (only for 392094) PNC 206177 ☐
- Frontal kicking strip, 1200 mm (only for 392094) PNC 206178 ☐
- Frontal kicking strip, 1600 mm (only for 392094) PNC 206179 ☐
- Pair of side kicking strips (only for 392094) PNC 206180 ☐
- 2 panels for service duct (single installation) (only for 392094) PNC 206181 ☐
- Large handrail (portioning shelf) 400 mm (only for 392094) PNC 206185 ☐
- Large handrail (portioning shelf) 800 mm (only for 392094) PNC 206186 ☐
- Frontal handrail 1200 mm (only for 392094) PNC 206191 ☐
- Frontal handrail 1600 mm (only for 392094) PNC 206192 ☐
- 2 panels for service duct (back to back installation) (only for 392094) PNC 206202 ☐
- 4 feet for concrete installation (not for 900 line freestanding grill) (only for 392094) PNC 206210 ☐

- Chimney upstand, 400 mm (only for 392094) PNC 206303 ☐
- 2 side covering panels, height 700 mm, depth 900 mm (only for 392094) PNC 206335 ☐
- Door for open base cupboard (only for 392094) PNC 206342 ☐
- Base support for feet or wheels - 400mm (EVO700/900) (only for 392094) PNC 206366 ☐
- Base support for feet or wheels - 800mm (EVO700/900) (only for 392094) PNC 206367 ☐
- Base support for feet or wheels - 1200mm (EVO700/EVO900) (only for 392094) PNC 206368 ☐
- Base support for feet or wheels - 1600mm (EVO700/900) (only for 392094) PNC 206369 ☐
- Base support for feet or wheels - 2000mm (EVO700/900) (only for 392094) PNC 206370 ☐
- Rear paneling - 600mm (EVO700/900) (only for 392094) PNC 206373 ☐
- Rear paneling - 800mm (EVO700/900) (only for 392094) PNC 206374 ☐
- Rear paneling - 1000mm (EVO700/900) (only for 392094) PNC 206375 ☐
- Rear paneling - 1200mm (EVO700/900) (only for 392094) PNC 206376 ☐
- Base support for feet/wheels (600mm) (only for 392094) PNC 206431 ☐
- 2 half baskets for 18lt fryers with front hook (only for 392094) PNC 927200 ☐
- 1 full basket for 18lt fryers with front hook (only for 392094) PNC 927201 ☐
- 2 half size baskets for 15lt OptiOil and 18/23lt fryers (only for 392094) PNC 927223 ☐
- 1 full size basket for 15lt OptiOil and 18/23lt fryers (only for 392094) PNC 927226 ☐

Modular Cooking Range Line EVO900 One Well Electric Fryer 18 liter

Front

Side


EI = Electrical inlet (power)
EQ = Equipotential screw

Top


Electric

Supply voltage:

392094 (Z9FRED1HF0)

380-400 V/3N ph/50/60 Hz

392178 (Z9FRED1HFN)

230 V/3 ph/50/60 Hz

Predisposed for:

392094 (Z9FRED1HF0)

380-400V 3N~ 50/60Hz
15-16,5kW

Total Watts:

16.5 kW

Key Information:

Usable well dimensions (width): 340 mm

Usable well dimensions (height): 290 mm

Usable well dimensions (depth): 400 mm

Well capacity: 18 lt MIN; 20 lt MAX

Thermostat Range: 105 °C MIN; 185 °C MAX

Net weight: 57 kg

Shipping weight:

392094 (Z9FRED1HF0)

61 kg

392178 (Z9FRED1HFN)

69 kg

Shipping height:

392094 (Z9FRED1HF0)

1080 mm

392178 (Z9FRED1HFN)

1120 mm

Shipping width:

392094 (Z9FRED1HF0)

460 mm

392178 (Z9FRED1HFN)

480 mm

Shipping depth:

392094 (Z9FRED1HF0)

1020 mm

392178 (Z9FRED1HFN)

1040 mm

Shipping volume:

392094 (Z9FRED1HF0)

0.51 m³

392178 (Z9FRED1HFN)

0.56 m³

Certification group:

392094 (Z9FRED1HF0)

EF19118

392178 (Z9FRED1HFN)

N9FE3

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.