

**392141 (Z9BRGJDPFM)**

100-lt gas automatic tilting braising pan with Duomat cooking surface, water tap, energy control and thermostatic control

**Main Features**

- Actual cooking temperature setting through adjustable thermostat.
- Smooth large surfaces, easy access for cleaning.
- The special design of the control knob system guarantees against water infiltration.
- Double-skin well and lid to reduce heat dispersion.
- Lid is double-lined, insulated in 20/10 Stainless steel.
- Energy input controlled by energy regulator.
- Automatic tilting mechanism to facilitate pan emptying.
- Bratt pan ideal for sautéing, poaching, steaming, boiling, stewing and damp cooking.
- Duomat cooking surface allows to perform wet and dry cooking alternatively.
- Working temperature can be set from 80 °C to 300 °C.

**Construction**

- All pan internal surfaces round and polished for better hygiene.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- IPX5 water resistance certification.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- Cooking surface with [i][b]Duomat[/b]/[i] bottom: a 10 mm-thick alloy obtained from the combination of 2 different stainless steels for better thermal stability and corrosion resistance.
- Usable capacity of the well 85 liters.

**Sustainability**

- Heat-insulated: limited heat radiation and low energy consumption.

## Optional Accessories

| PNC Code                      | Description                                                            |
|-------------------------------|------------------------------------------------------------------------|
| <b>Chimney upstands</b>       |                                                                        |
| 206132                        | Draught diverter, 150 mm diameter                                      |
| 206133                        | Matching ring for flue condenser, 150 mm diameter                      |
| 206305                        | Chimney upstand, 1000 mm                                               |
| 206399                        | Chimney grid net, 200mm (EVO700&EVO900)                                |
| 206400                        | Chimney grid net, 400mm                                                |
| <b>Feet, wheels and ramps</b> |                                                                        |
| 206136                        | Flanged feet kit                                                       |
| 206210                        | 4 feet for concrete installation (not for 900 line freestanding grill) |
| <b>Gas nozzles</b>            |                                                                        |
| 206464                        | Kit G.25.3 (NI) gas nozzles for 700 and 900 braising pans              |
| <b>Kicking strips</b>         |                                                                        |
| 206150                        | Frontal kicking strip for concrete installation, 1000 mm               |
| 206151                        | Frontal kicking strip for concrete installation, 1200 mm               |
| 206152                        | Frontal kicking strip for concrete installation, 1600 mm               |
| 206177                        | Frontal kicking strip, 1000 mm                                         |
| 206178                        | Frontal kicking strip, 1200 mm                                         |
| 206179                        | Frontal kicking strip, 1600 mm                                         |
| 206180                        | Pair of side kicking strips                                            |
| <b>Other accessories</b>      |                                                                        |
| 927225                        | Pressure regulator for gas units                                       |
| <b>Panels</b>                 |                                                                        |
| 206181                        | 2 panels for service duct (single installation)                        |
| 206202                        | 2 panels for service duct (back to back installation)                  |
| 206375                        | Rear paneling - 1000mm (EVO700/900)                                    |
| 206376                        | Rear paneling - 1200mm (EVO700/900)                                    |
| <b>Trolleys</b>               |                                                                        |
| 922403                        | Trolley with lifting and removable tank                                |

## Recommended Detergents

| PNC Code | Description                                  |
|----------|----------------------------------------------|
| 0S2292   | C41 HI-TEMP RAPID DEGREASER 6pcx1L+1 trigger |

# Technical specifications

## Electric

**Supply voltage:** 220-230 V/1 ph/50 Hz

**Total Watts:** 0.1 kW

## Gas

**Gas Power:** 27 kW

**Standard gas delivery:** Natural Gas G20 (20mbar)

**Gas Type Option:** LPG; Natural Gas

**Gas Inlet:** 1/2"

## Key Information:

**Cooking Surface Depth:** 565 mm

**Cooking Surface Width:** 880 mm

**Cooking Well Height:** 180 mm

**Well Capacity, Max:** 100 lt

**Working Temperature MIN:** 80 °C

**Working Temperature MAX:** 300 °C

**Net weight:** 180 kg

**Shipping weight (gross):** 187 kg

**Shipping height:** 1080 mm


**Shipping width:** 1020 mm

**Shipping depth:** 1070 mm


**Shipping volume:** 1.18 m<sup>3</sup>

**Certification group:** N9EBRG


Front



Side

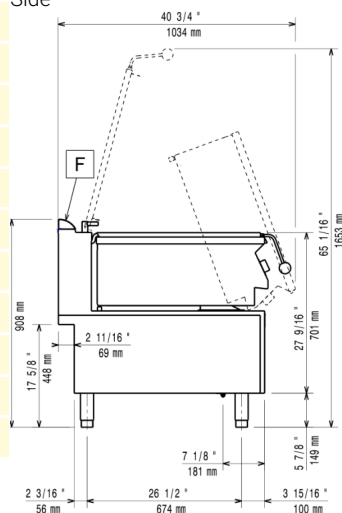

Top

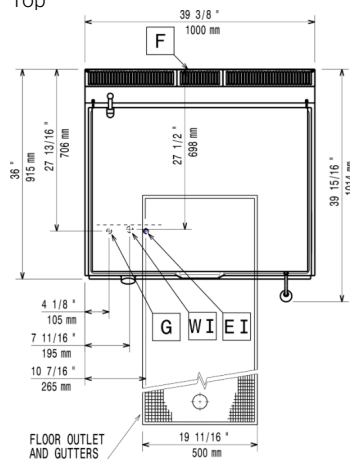

CW1 = Cold Water inlet 1 (cleaning)

G = Gas connection

EI = Electrical inlet (power)



Part of



**Electrolux  
Professional  
Group**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

[www.zanussiprofessional.com](http://www.zanussiprofessional.com)

2026/07/28

3/3