

**392353 (Z9INEDW00P)**

Electric single induction wok - HP (5 kW)

Main Features

- IPX5 water protection.
- Heavy duty glass-ceramic wok bowl
- 5kW inductor endowed with overheating safety device.
- Reduced heat emission in the work environment.
- Pan detection system - the inductor is switched on only when an induction-friendly wok pan is placed on the bowl.
- Pots diameter to be used : min 12cm, max 28 cm in order to obtain maximum heating efficiency.
- Suitable for countertop installation.

Construction

- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- AISI 304 stainless steel worktop, 2mm thick.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- All the functional components are accessible via the front of the appliance.
- Side and rear panel in AISI 304 stainless steel.

Sustainability

- High efficiency (up to 90%) induction heating system maximizes the heat transferred to the food and reduces energy consumption in stand-by mode.
- This model is compliant with Swiss Energy Efficiency Ordinance (730.02).

Optional Accessories

PNC Code	Description
Bridge supports	
206137	Support for bridge type installation, 800 mm
206138	Support for bridge type installation, 1000 mm
206139	Support for bridge type installation, 1200 mm
206140	Support for bridge type installation, 1400 mm
206141	Support for bridge type installation, 1600 mm
206154	Support for bridge type installation, 400 mm
Installation solutions	
206086	Junction sealing kit
Pots and pans	
911000	Stainless steel wok pan, design in line with wok cuvette
911003	Non-stick wok pan, design in line with wok cuvette

Recommended Detergents

PNC Code	Description
0S2292	C41 HI-TEMP RAPID DEGREASER 6pcx1L+1 trigger
0S2881	S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T
0S2882	S02 DEGREASER 6pzx750ml - ADR&IMDG Limited Quantity
0S2883	S03 ALCOHOL BASE DETERGENT; 6 BOTTLES X 750ML; ADR&IMDG&IATA Limited Quantity
0S2884	S04 GLASSES & HARD SURFACES CLEANERS; 6 BOTTLES X 750ML
0S3257	S05 - MULTIPURPOSE DEGREASER; 6PCS X 750ML; ADR&IMDG Limited Quantity

Technical specifications


Electric

Supply voltage:	380-400 V/3 ph/50/60 Hz
Total Watts:	5 kW
Predisposed for:	380-400V 3~ 50/60Hz 5kW


Key Information:

External dimensions, Width:	400 mm
External dimensions, Depth:	900 mm
External dimensions, Height:	250 mm
Net weight:	30 kg
Certification group:	N9CIN
Back Plates dimensions:	Ø 300
Induction Top Dimensions (width):	400 mm
Induction Top Dimensions (depth):	900 mm


Front



Side

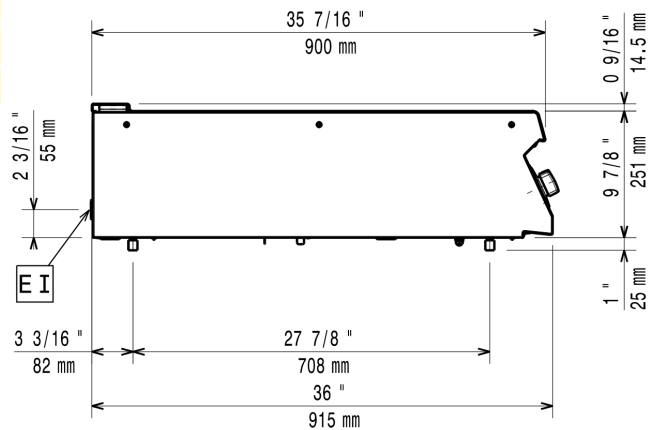

Top

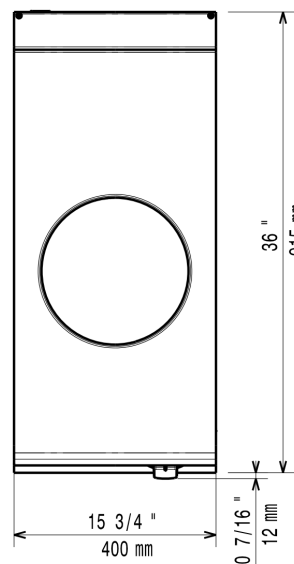

EI = Electrical inlet (power)

EQ = Equipotential screw

