

**372421 (Z7KKETBAMCI)**

15-lt gas fryer with 1 "V" shape well (external burners), 1 basket and lid included - free standing, Q Mark

Main Features

- All major compartments located in front of unit for ease of maintenance.
- Deep drawn V-Shaped well.
- Flame failure device on each burner.
- Gas appliance supplied for use with natural or LPG gas, conversion jets supplied as standard.
- IPx4 water protection.
- Overheat protection thermostat as standard on all units.
- Piezo spark ignition for added safety.
- Thermostatic regulation of oil temperature up to a maximum of 185 °C.
- Two high efficiency 7 kW burners in stainless steel with flame failure device attached to the outside of the well.
- Unit to be mounted on 50mm height adjustable feet in stainless steel.
- Oil drains through a tap into a drainage container positioned under the well.
- Optional portable oil quality monitoring tool (code 9B8081) for efficient oil management.

Construction

- Interior of well with rounded corners for ease of cleaning.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- One piece pressed 1.5 mm work top in Stainless steel.
- All exterior panels in Stainless Steel with Scotch Brite finishing.

Included Accessories

PNC Code	Description	Quantity
206342	Door for open base cupboard	1
921691	1 full size basket for 14/15lt fryers	1

Optional Accessories

PNC Code	Description
Bases & base accessories	
206342	Door for open base cupboard
Baskets	
921691	1 full size basket for 14/15lt fryers
921692	2 half size baskets for 14/15lt fryers
Chimney upstands	
206126	Draught diverter, 120 mm diameter
206127	Matching ring for flue condenser, 120 -130 mm diameter
206303	Chimney upstand, 400 mm
206310	Flue condenser for 1/2 module, 120 mm diameter
206400	Chimney grid net, 400mm
Feet, wheels and ramps	
206136	Flanged feet kit
206210	4 feet for concrete installation (not for 900 line freestanding grill)
206366	Base support for feet or wheels - 400mm (EVO700/900)
206367	Base support for feet or wheels - 800mm (EVO700/900)
206368	Base support for feet or wheels - 1200mm (EVO700/EVO900)
206369	Base support for feet or wheels - 1600mm (EVO700/900)
206431	Base support for feet/wheels (600mm)
Gas nozzles	
206467	Kit G.25.3 (NI) gas nozzles for 900 fryers
Grease/oil management	
206235	Sediment tray for 15lt fryers
206301	Oil drain pipe for 15lt free standing fryer
921693	Filter for fryer oil collection basin for 7lt, 14lt, 15lt free standing fryers
921695	Unclogging rod for 15lt fryers drainage pipe
921696	Deflector for floured products for the 15lt fryer
Handrails	
206166	Frontal handrail 400 mm
206167	Frontal handrail 800 mm
206185	Large handrail (portioning shelf) 400 mm
206186	Large handrail (portioning shelf) 800 mm
206191	Frontal handrail 1200 mm
206192	Frontal handrail 1600 mm
206240	Right and left side handrails
206308	Back handrail 800 mm

PNC Code	Description
Installation solutions	
206086	Junction sealing kit
Kicking strips	
206147	Frontal kicking strip for concrete installation, 400 mm
206148	Frontal kicking strip for concrete installation, 800 mm
206150	Frontal kicking strip for concrete installation, 1000 mm
206151	Frontal kicking strip for concrete installation, 1200 mm
206152	Frontal kicking strip for concrete installation, 1600 mm
206175	Frontal kicking strip, 400 mm
206176	Frontal kicking strip, 800 mm
206177	Frontal kicking strip, 1000 mm
206178	Frontal kicking strip, 1200 mm
206179	Frontal kicking strip, 1600 mm
206249	Pair of side kicking strips
206265	Pair of side kicking strips (concrete installation)
Other accessories	
927225	Pressure regulator for gas units
Panels	
206373	Rear paneling - 600mm (EVO700/900)
206374	Rear paneling - 800mm (EVO700/900)
206375	Rear paneling - 1000mm (EVO700/900)
206376	Rear paneling - 1200mm (EVO700/900)
Other accessories	
206319	2 side covering panels, height 700 mm, depth 700 mm

Recommended Detergents

PNC Code	Description
0S2292	C41 HI-TEMP RAPID DEGREASER 6pcx1L+1 trigger
0S2881	S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T
0S2882	S02 DEGREASER 6pzx750ml - ADR&IMDG Limited Quantity
0S2883	S03 ALCOHOL BASE DETERGENT; 6 BOTTLES X 750ML; ADR&IMDG&IATA Limited Quantity
0S2884	S04 GLASSES & HARD SURFACES CLEANERS; 6 BOTTLES X 750ML
0S3257	S05 - MULTIPURPOSE DEGREASER; 6PCS X 750ML; ADR&IMDG Limited Quantity

Technical specifications


Gas

Gas Power:	14 kW
Standard gas delivery:	G30 – 50 mbar
Gas Type Option:	G31 37 mbar
Gas Inlet:	1/2"


Key Information:

Usable well dimensions (width):	240 mm
Usable well dimensions (height):	505 mm
Usable well dimensions (depth):	380 mm
Well capacity:	13 lt MIN; 15 lt MAX
Thermostat Range:	105 °C MIN; 185 °C MAX
Net weight:	55 kg
Shipping weight (gross):	58 kg
Shipping height:	1120 mm
Shipping width:	460 mm
Shipping depth:	820 mm
Shipping volume:	0.42 m³
Certification group:	N7FG


Front

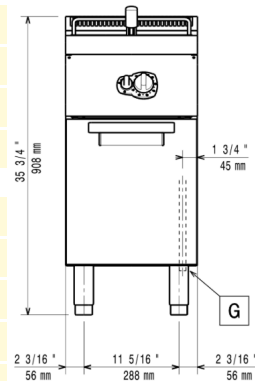

Side

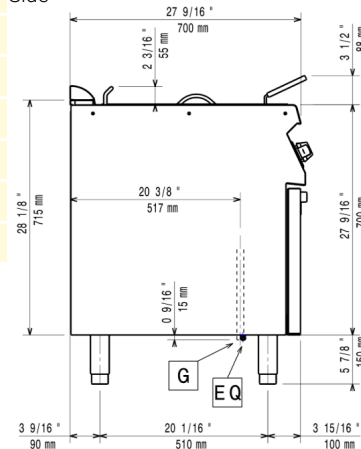

Top

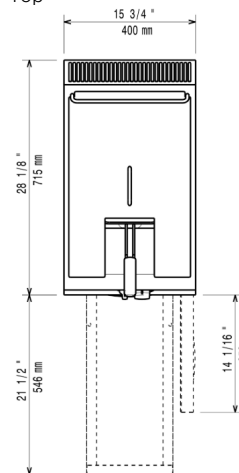

G = Gas connection

EQ = Equipotential screw

DO = Overflow drain pipe