

**372400 (Z7AAITAOMCI)**

2-burner (5,5 kW each) gas boiling top, Q Mark

Main Features

- Burners to feature flame regulator.
- Flame failure device on each burner protects against gas leakage when accidental extinguishing of the flame occurs.
- Gas appliance supplied for use with natural or LPG gas, conversion jets supplied as standard.
- IPx4 water protection.
- Large sized pan support in cast iron (stainless steel as option) with long center fins to allow the use of the largest down to the smallest pans.
- Protected pilot light.
- The two 5.5 kW high efficiency flower flame burners allow the flame to adapt to different size pans.
- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- Pan supports in cast iron are washable in a dishwasher.
- Suitable for countertop installation.

Construction

- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- One piece pressed 1.5 mm work top in Stainless steel.
- All exterior panels in Stainless Steel with Scotch Brite finishing.

Optional Accessories

PNC Code	Description
Bridge supports	
206137	Support for bridge type installation, 800 mm
206138	Support for bridge type installation, 1000 mm
206139	Support for bridge type installation, 1200 mm
206140	Support for bridge type installation, 1400 mm
206141	Support for bridge type installation, 1600 mm
206154	Support for bridge type installation, 400 mm
Burner grids, plates, supports	
206260	Single burner smooth plate for direct cooking - fits frontal burners only
206261	Single burner ribbed plate for direct cooking- fits frontal burners only
206264	Single burner radiant plate for pan support
206297	Stainless steel grid for 2 burners
206363	Wok pan support for open burners (EVO700/900)
Chimney upstands	
206126	Draught diverter, 120 mm diameter
206127	Matching ring for flue condenser, 120 -130 mm diameter
206303	Chimney upstand, 400 mm
206310	Flue condenser for 1/2 module, 120 mm diameter
Gas nozzles	
206387	Kit town gas nozzles (G150) for EVO700 gas range
206460	Kit G.25.3 (NI) gas nozzles for 700 top and - freestanding on oven - gas cookers
Handrails	
206166	Frontal handrail 400 mm
206167	Frontal handrail 800 mm
206185	Large handrail (portioning shelf) 400 mm
206186	Large handrail (portioning shelf) 800 mm
206191	Frontal handrail 1200 mm
206192	Frontal handrail 1600 mm
206240	Right and left side handrails
206308	Back handrail 800 mm
Installation solutions	
206086	Junction sealing kit
Other accessories	
927225	Pressure regulator for gas units
Panels	
206320	2 side covering panels, height 250 mm, depth 700 mm

PNC Code	Description
Water taps	
206289	Water column with swivel arm (water column extension not included)
206291	Water column extension

Recommended Detergents

PNC Code	Description
0S2292	C41 HI-TEMP RAPID DEGREASER 6pcx1L+1 trigger
0S2881	S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T
0S2882	S02 DEGREASER 6pzx750ml - ADR&IMDG Limited Quantity
0S2883	S03 ALCOHOL BASE DETERGENT; 6 BOTTLES X 750ML; ADR&IMDG&IATA Limited Quantity
0S2884	S04 GLASSES & HARD SURFACES CLEANERS; 6 BOTTLES X 750ML
0S3257	S05 - MULTIPURPOSE DEGREASER; 6PCS X 750ML; ADR&IMDG Limited Quantity

Technical specifications


Gas

Gas Power:	11 kW
Standard gas delivery:	G30 – 50 mbar
Gas Type Option:	G31 37 mbar
Gas Inlet:	1/2"


Key Information:

Net weight:	20 kg
Shipping weight (gross):	28 kg
Shipping height:	530 mm
Shipping width:	460 mm
Shipping depth:	820 mm
Shipping volume:	0.2 m³
Front Burners Power:	5.5 - 0 kW
Back Burners Power:	5.5 - 0 kW
Certification group:	N7CG
Back Burners Dimension - mm	Ø 60
Front Burners Dimension - mm	Ø 60


Front

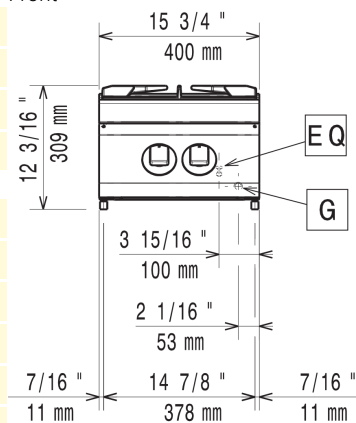

Side

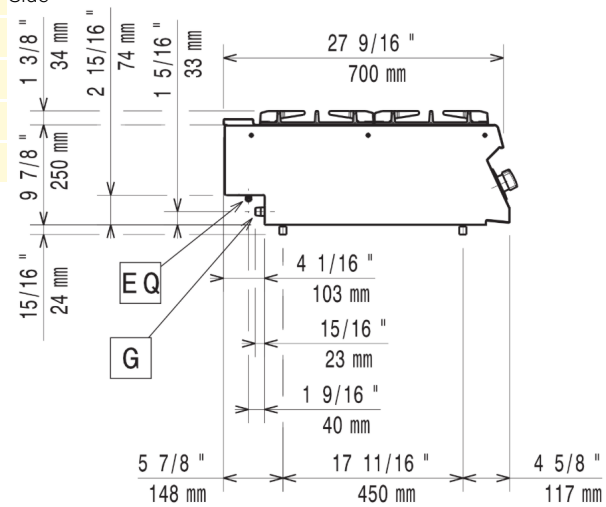

Top

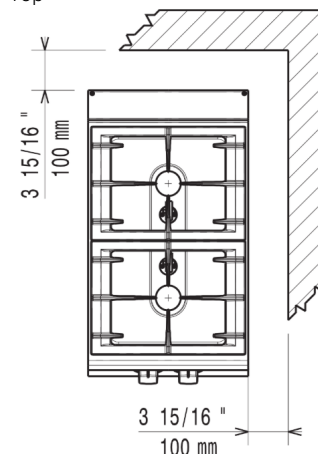

G = Gas connection