

**372402 (Z7AAKTBCMEI)**

4-burner (5,5 kW each) gas range on electric oven (6 kW), Q Mark

372403 (Z7AAKIBCMEI)

4-burner (5,5 kW each) gas range on electric oven (6 kW), Q Mark

Main Features

- Burners to feature flame regulator.
- Double skinned door with pressed internal panel for heat insulation.
- Flame failure device on each burner protects against gas leakage when accidental extinguishing of the flame occurs.
- Gas appliance supplied for use with natural or LPG gas, conversion jets supplied as standard.
- IPx4 water protection.
- Large sized pan support in cast iron (stainless steel as option) with long center fins to allow the use of the largest down to the smallest pans.
- Oven thermostat adjustable from 140 °C to 300 °C.
- Protected pilot light.
- The four 5.5 kW high efficiency flower flame burners allow the flame to adapt to different size pans.
- Unit to have stainless steel feet with height adjustment up to 50 mm.
- Pan supports in cast iron are washable in a dishwasher.
- Base compartment consists of an electric standard oven positioned beneath the base plate. Stainless steel oven chamber to have 3 levels of runners to accommodate 2/1 GN shelves (2 steam pans) and ribbed enamelled steel base plate.

Construction

- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- One piece pressed 1.5 mm work top in Stainless steel.
- All exterior panels in Stainless Steel with Scotch Brite finishing.

Included Accessories

PNC Code	Description	Quantity
164250	GN2/1 chrome grid for static oven	1

Optional Accessories

PNC Code	Description
Burner grids, plates, supports	
206260	Single burner smooth plate for direct cooking - fits frontal burners only
206261	Single burner ribbed plate for direct cooking- fits frontal burners only
206264	Single burner radiant plate for pan support
206297	Stainless steel grid for 2 burners
206363	Wok pan support for open burners (EVO700/900)
Chimney upstands	
206132	Draught diverter, 150 mm diameter
206133	Matching ring for flue condenser, 150 mm diameter
206246	Flue condenser for 1 module, 150 mm diameter
206304	Chimney upstand, 800 mm
Containers, trays and grids	
164250	GN2/1 chrome grid for static oven
Feet, wheels and ramps	
206135	4 wheels, 2 swivelling with brake (EVO700/900). It is mandatory to install with base supports for feet/wheels.
206136	Flanged feet kit
206210	4 feet for concrete installation (not for 900 line freestanding grill)
206367	Base support for feet or wheels - 800mm (EVO700/900)
206368	Base support for feet or wheels - 1200mm (EVO700/EVO900)
206369	Base support for feet or wheels - 1600mm (EVO700/900)
Gas nozzles	
206387	Kit town gas nozzles (G150) for EVO700 gas range (only for 372402)
206460	Kit G.25.3 (NI) gas nozzles for 700 top and - freestanding on oven - gas cookers
Handrails	
206167	Frontal handrail 800 mm
206186	Large handrail (portioning shelf) 800 mm
206191	Frontal handrail 1200 mm
206192	Frontal handrail 1600 mm
206240	Right and left side handrails
206308	Back handrail 800 mm
Installation solutions	
206086	Junction sealing kit

PNC Code	Description
Kicking strips	
206148	Frontal kicking strip for concrete installation, 800 mm
206150	Frontal kicking strip for concrete installation, 1000 mm
206151	Frontal kicking strip for concrete installation, 1200 mm
206152	Frontal kicking strip for concrete installation, 1600 mm
206176	Frontal kicking strip, 800 mm
206177	Frontal kicking strip, 1000 mm
206178	Frontal kicking strip, 1200 mm
206179	Frontal kicking strip, 1600 mm
206249	Pair of side kicking strips
206265	Pair of side kicking strips (concrete installation)
Panels	
206374	Rear paneling - 800mm (EVO700/900)
206375	Rear paneling - 1000mm (EVO700/900)
206376	Rear paneling - 1200mm (EVO700/900)
Water taps	
206289	Water column with swivel arm (water column extension not included)
206291	Water column extension
Other accessories	
206319	2 side covering panels, height 700 mm, depth 700 mm

Recommended Detergents

PNC Code	Description
OS2292	C41 HI-TEMP RAPID DEGREASER 6pcx1L+1 trigger
OS2881	S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T
OS2882	S02 DEGREASER 6pzx750ml - ADR&IMDG Limited Quantity
OS2883	S03 ALCOHOL BASE DETERGENT; 6 BOTTLES X 750ML; ADR&IMDG&IATA Limited Quantity
OS2884	S04 GLASSES & HARD SURFACES CLEANERS; 6 BOTTLES X 750ML
OS3257	S05 - MULTIPURPOSE DEGREASER; 6PCS X 750ML; ADR&IMDG Limited Quantity


Technical specifications

	372402	372403
Gas		
Gas Power:	22 kW	22 kW
Standard gas delivery:	G30 – 50 mbar	G30 – 50 mbar
Gas Type Option:	G31 37 mbar	G31 37 mbar
Gas Inlet:	1/2"	1/2"
Gas Power Option:	Btu/hr (0 kW)	Btu/hr (0 kW)


Key Information:

Oven working Temperature:	140 °C MIN; 300 °C MAX	140 °C MIN; 300 °C MAX
Oven Cavity Dimensions (width):	540 mm	540 mm
Oven Cavity Dimensions (height):	300 mm	300 mm
Oven Cavity Dimensions (depth):	650 mm	650 mm
External dimensions, Width:	800 mm	800 mm
External dimensions, Depth:	700 mm	700 mm
External dimensions, Height:	850 mm	850 mm
Net weight:	88 kg	80 kg
Front Burners Power:	5.5 - 5.5 kW	5.5 - 5.5 kW
Back Burners Power:	5.5 - 5.5 kW	5.5 - 5.5 kW
Certification group:	N7CG	N7CG
Back Burners Dimension - mm	Ø 60 Ø 60	Ø 60 Ø 60
Front Burners Dimension - mm	Ø 60 Ø 60	Ø 60 Ø 60


Front

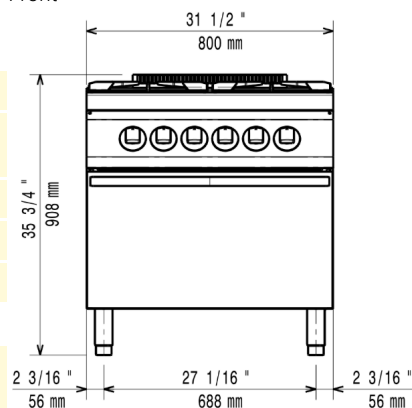

Side

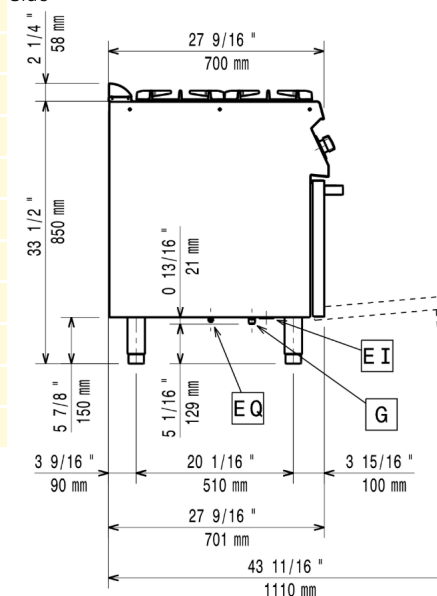

Top

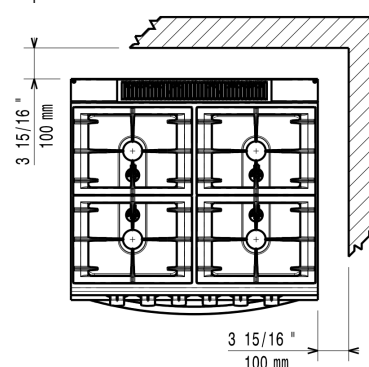

G = Gas connection

