

**392607 (Z9KKETBAMCI)**

15-lt gas fryer with 1 "V" shaped well (external burners) and 1 basket - free standing, Q Mark

**Main Features**

- All major compartments located in front of unit for ease of maintenance.
- Deep drawn V-Shaped well.
- Flame failure device on each burner.
- Overheat protection thermostat as standard on all units.
- Piezo spark ignition for added safety.
- The special design of the control knob system guarantees against water infiltration.
- Unit delivered with four 50 mm legs in stainless steel as standard (all round Stainless steel kick plates as option).
- Thermostatic regulation of oil temperature up to a maximum of 190 °C.
- Oil drains through a tap into a drainage container positioned under the well.
- Supplied as standard with 1 basket and 1 right side door for cupboard.
- High efficiency 14 kW burners in stainless steel with flame failure device attached to the outside of the well.
- Optional portable oil quality monitoring tool (code 9B8081) for efficient oil management.

**Construction**

- Interior of well with rounded corners for ease of cleaning.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- IPX5 water resistance certification.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- Unit is 900mm deep to give a larger working surface area.

**Included Accessories**

| PNC Code | Description                           | Quantity |
|----------|---------------------------------------|----------|
| 206342   | Door for open base cupboard           | 1        |
| 921691   | 1 full size basket for 14/15lt fryers | 1        |

## Optional Accessories

| PNC Code                            | Description                                                                    |
|-------------------------------------|--------------------------------------------------------------------------------|
| <b>Bases &amp; base accessories</b> |                                                                                |
| 206342                              | Door for open base cupboard                                                    |
| <b>Baskets</b>                      |                                                                                |
| 921691                              | 1 full size basket for 14/15lt fryers                                          |
| 921692                              | 2 half size baskets for 14/15lt fryers                                         |
| <b>Chimney upstands</b>             |                                                                                |
| 206126                              | Draught diverter, 120 mm diameter                                              |
| 206127                              | Matching ring for flue condenser, 120 -130 mm diameter                         |
| 206303                              | Chimney upstand, 400 mm                                                        |
| 206310                              | Flue condenser for 1/2 module, 120 mm diameter                                 |
| 206400                              | Chimney grid net, 400mm                                                        |
| <b>Feet, wheels and ramps</b>       |                                                                                |
| 206136                              | Flanged feet kit                                                               |
| 206210                              | 4 feet for concrete installation (not for 900 line freestanding grill)         |
| 206366                              | Base support for feet or wheels - 400mm (EVO700/900)                           |
| 206367                              | Base support for feet or wheels - 800mm (EVO700/900)                           |
| 206368                              | Base support for feet or wheels - 1200mm (EVO700/EVO900)                       |
| 206369                              | Base support for feet or wheels - 1600mm (EVO700/900)                          |
| 206370                              | Base support for feet or wheels - 2000mm (EVO700/900)                          |
| 206431                              | Base support for feet/wheels (600mm)                                           |
| <b>Gas nozzles</b>                  |                                                                                |
| 206467                              | Kit G.25.3 (NI) gas nozzles for 900 fryers                                     |
| <b>Grease/oil management</b>        |                                                                                |
| 206235                              | Sediment tray for 15lt fryers                                                  |
| 206301                              | Oil drain pipe for 15lt free standing fryer                                    |
| 921693                              | Filter for fryer oil collection basin for 7lt, 14lt, 15lt free standing fryers |
| 921695                              | Unclogging rod for 15lt fryers drainage pipe                                   |
| 921696                              | Deflector for floured products for the 15lt fryer                              |

| PNC Code                      | Description                                              |
|-------------------------------|----------------------------------------------------------|
| <b>Handrails</b>              |                                                          |
| 206165                        | Side handrail for right/left hand                        |
| 206166                        | Frontal handrail 400 mm                                  |
| 206167                        | Frontal handrail 800 mm                                  |
| 206185                        | Large handrail (portioning shelf) 400 mm                 |
| 206186                        | Large handrail (portioning shelf) 800 mm                 |
| 206191                        | Frontal handrail 1200 mm                                 |
| 206192                        | Frontal handrail 1600 mm                                 |
| 206308                        | Back handrail 800 mm                                     |
| 206309                        | BACK HANDRAIL 1200 MM                                    |
| <b>Installation solutions</b> |                                                          |
| 206086                        | Junction sealing kit                                     |
| <b>Kicking strips</b>         |                                                          |
| 206147                        | Frontal kicking strip for concrete installation, 400 mm  |
| 206148                        | Frontal kicking strip for concrete installation, 800 mm  |
| 206150                        | Frontal kicking strip for concrete installation, 1000 mm |
| 206151                        | Frontal kicking strip for concrete installation, 1200 mm |
| 206152                        | Frontal kicking strip for concrete installation, 1600 mm |
| 206157                        | Pair of side kicking strips for concrete installation    |
| 206175                        | Frontal kicking strip, 400 mm                            |
| 206176                        | Frontal kicking strip, 800 mm                            |
| 206177                        | Frontal kicking strip, 1000 mm                           |
| 206178                        | Frontal kicking strip, 1200 mm                           |
| 206179                        | Frontal kicking strip, 1600 mm                           |
| 206180                        | Pair of side kicking strips                              |
| <b>Other accessories</b>      |                                                          |
| 927225                        | Pressure regulator for gas units                         |
| <b>Panels</b>                 |                                                          |
| 206181                        | 2 panels for service duct (single installation)          |
| 206202                        | 2 panels for service duct (back to back installation)    |
| 206373                        | Rear paneling - 600mm (EVO700/900)                       |
| 206374                        | Rear paneling - 800mm (EVO700/900)                       |
| 206375                        | Rear paneling - 1000mm (EVO700/900)                      |
| 206376                        | Rear paneling - 1200mm (EVO700/900)                      |
| <b>Other accessories</b>      |                                                          |
| 206335                        | 2 side covering panels, height 700 mm, depth 900 mm      |

## Recommended Detergents

| PNC Code | Description                                                                   |
|----------|-------------------------------------------------------------------------------|
| 0S2292   | C41 HI-TEMP RAPID DEGREASER 6pcx1L+1 trigger                                  |
| 0S2881   | S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T                   |
| 0S2882   | S02 DEGREASER 6pzx750ml - ADR&IMDG Limited Quantity                           |
| 0S2883   | S03 ALCOHOL BASE DETERGENT; 6 BOTTLES X 750ML; ADR&IMDG&IATA Limited Quantity |
| 0S2884   | S04 GLASSES & HARD SURFACES CLEANERS; 6 BOTTLES X 750ML                       |
| 0S3257   | S05 - MULTIPURPOSE DEGREASER; 6PCS X 750ML; ADR&IMDG Limited Quantity         |

# Technical specifications


## Gas

|                        |               |
|------------------------|---------------|
| Gas Power:             | 14 kW         |
| Standard gas delivery: | G30 – 50 mbar |
| Gas Type Option:       | G31 37 mbar   |
| Gas Inlet:             | 1/2"          |


## Key Information:

|                                  |                        |
|----------------------------------|------------------------|
| Usable well dimensions (width):  | 240 mm                 |
| Usable well dimensions (height): | 505 mm                 |
| Usable well dimensions (depth):  | 380 mm                 |
| Well capacity:                   | 13 lt MIN; 15 lt MAX   |
| Thermostat Range:                | 120 °C MIN; 190 °C MAX |
| Net weight:                      | 50 kg                  |
| Shipping weight (gross):         | 64 kg                  |
| Shipping height:                 | 1080 mm                |
| Shipping width:                  | 460 mm                 |
| Shipping depth:                  | 1020 mm                |
| Shipping volume:                 | 0.51 m <sup>3</sup>    |
| Certification group:             | N9FG1                  |


Front

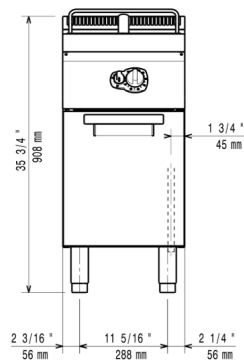

Side

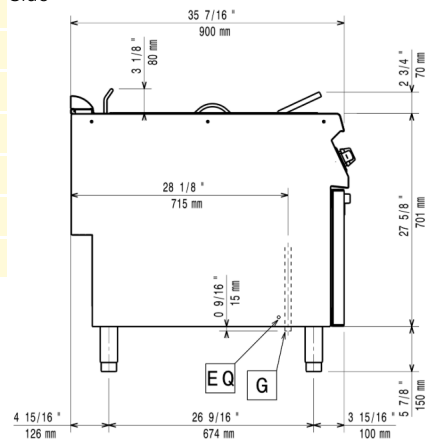

Top

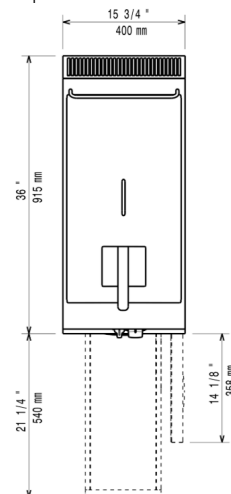

G = Gas connection  
EQ = Equipotential screw  
DO = Overflow drain pipe